



WEAR	<b>SEVERE</b>
CONTAMINATION	<b>SEVERE</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 333G 1T0333GMHPF450261**  
 Component  
**Left Final Drive**  
 Fluid  
**GEAR OIL SAE 80W90 (--- GAL)**

### RECOMMENDATION

We advise that you check all areas where dirt can enter the system. The oil change at the time of sampling has been noted. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0211563	---	---
Sample Date		Client Info		18 Apr 2024	---	---
Machine Age	hrs	Client Info		441	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				SEVERE	---	---

### WEAR

Gear wear is indicated.

PQ		ASTM D8184	>1250	184	---	---
Iron	ppm	ASTM D5185m	>750	▲ 2602	---	---
Chromium	ppm	ASTM D5185m	>9	▲ 53	---	---
Nickel	ppm	ASTM D5185m	>10	4	---	---
Titanium	ppm	ASTM D5185m		5	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>40	● 43	---	---
Lead	ppm	ASTM D5185m	>15	0	---	---
Copper	ppm	ASTM D5185m	>40	5	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

### CONTAMINATION










Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Silicon	ppm	ASTM D5185m	>75	▲ 290	---	---
Potassium	ppm	ASTM D5185m	>20	28	---	---
Water		WC Method	>0.075	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.075	NEG	---	---

### FLUID CONDITION

The oil is no longer serviceable as a result of the abnormal and/or severe wear.

Sodium	ppm	ASTM D5185m	>170	15	---	---
Boron	ppm	ASTM D5185m	400	2	---	---
Barium	ppm	ASTM D5185m	200	82	---	---
Molybdenum	ppm	ASTM D5185m	12	5	---	---
Manganese	ppm	ASTM D5185m		25	---	---
Magnesium	ppm	ASTM D5185m	12	19	---	---
Calcium	ppm	ASTM D5185m	150	37	---	---
Phosphorus	ppm	ASTM D5185m	1650	292	---	---
Zinc	ppm	ASTM D5185m	125	47	---	---
Sulfur	ppm	ASTM D5185m	22500	17776	---	---
Visc @ 40°C	cSt	ASTM D445	143	138	---	---

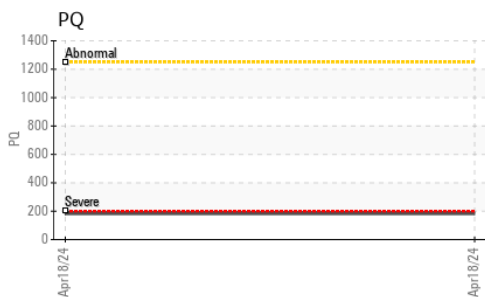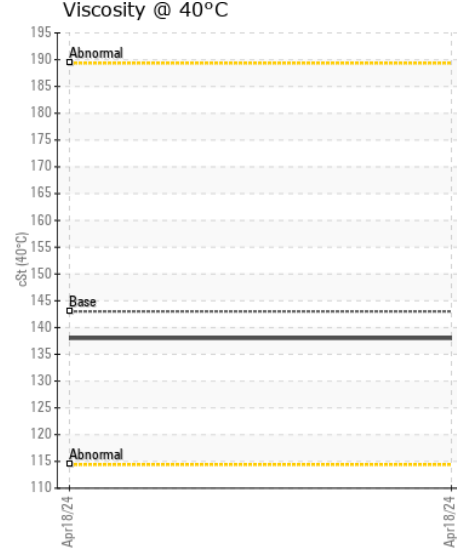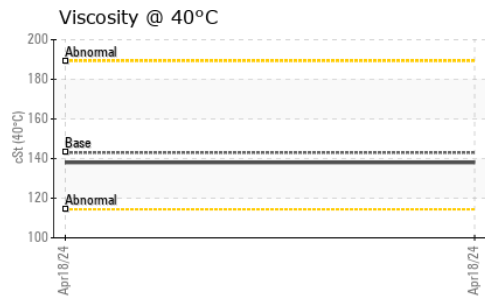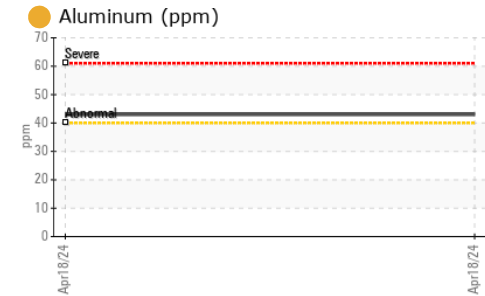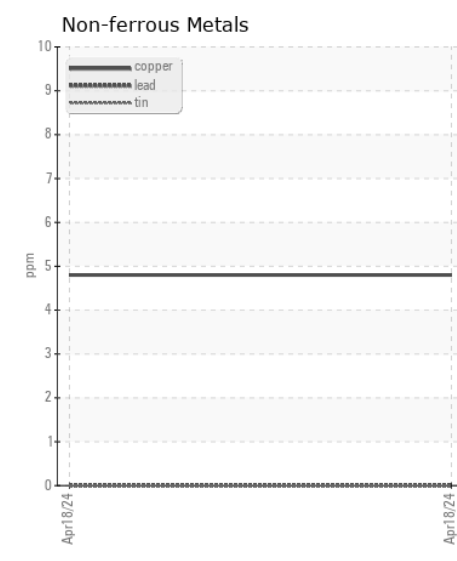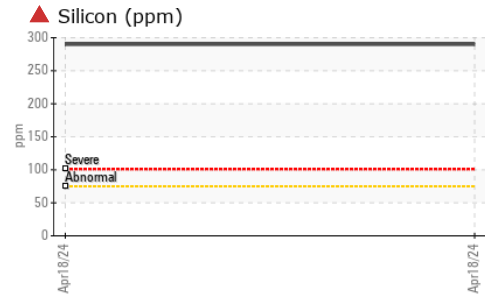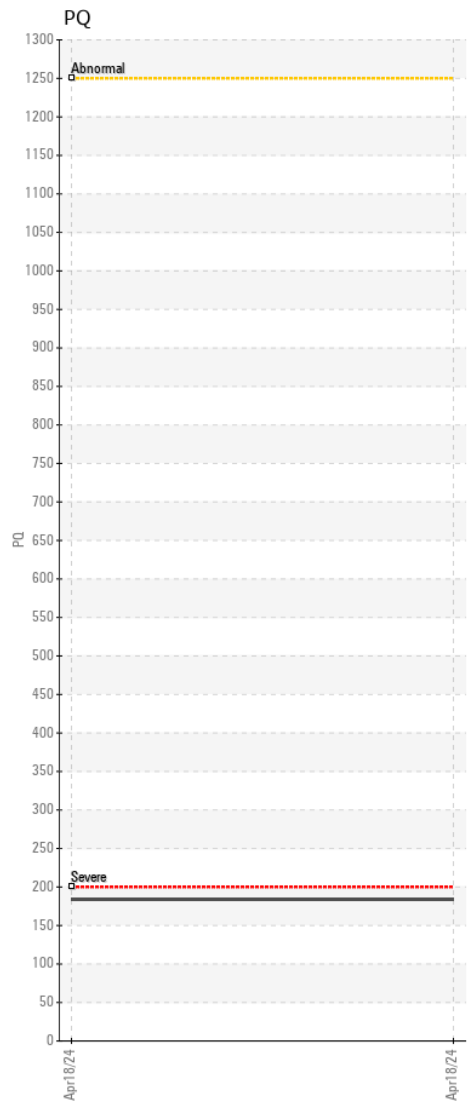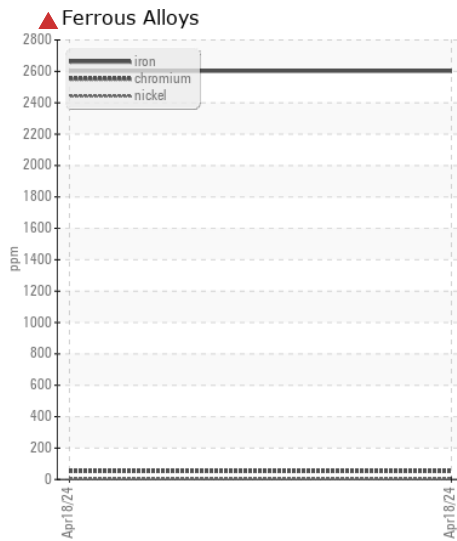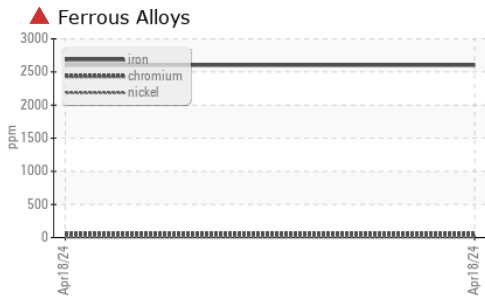

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0211563 **Received** : 22 Apr 2024  
**Lab Number** : 06156260 **Tested** : 23 Apr 2024  
**Unique Number** : 10991683 **Diagnosed** : 24 Apr 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - ASHLAND**  
 11047 LEADBETTER RD  
 ASHLAND, VA  
 US 23005  
 Contact: DAVID ZIEG  
 dzieg@jamesriverequipment.com  
 T: (804)798-6001  
 F: (804)798-0292

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)