



Area

[46123]

Machine Id

HITACHI 350LC-6 1FFDDR70CKF940744

Component

Left Final Drive

Fluid

JOHN DEERE GL-5 80W90 (--- GAL)

RECOMMENDATION

We advise that you check all areas where dirt can enter the system. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.

CONTAMINATION

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

FLUID CONDITION









The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0211174	JR0184003	JR0157343
Sample Date		Client Info		17 Apr 2024	07 Sep 2023	20 Jan 2023
Machine Age	hrs	Client Info		3936	3457	2943
Oil Age	hrs	Client Info		2534	1500	2561
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Not Changd
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		285	234	163
Iron	ppm	ASTM D5185m	>500	934	802	714
Chromium	ppm	ASTM D5185m	>10	10	8	8
Nickel	ppm	ASTM D5185m	>10	0	1	2
Titanium	ppm	ASTM D5185m		3	3	2
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	42	37	34
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>50	4	2	2
Tin	ppm	ASTM D5185m	>10	0	<1	0
Vanadium	ppm	ASTM D5185m		<1	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

Silicon	ppm	ASTM D5185m	>75	▲ 149	▲ 123	▲ 102
Potassium	ppm	ASTM D5185m	>20	7	7	6
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	LIGHT	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

Sodium	ppm	ASTM D5185m		4	3	2
Boron	ppm	ASTM D5185m		17	15	14
Barium	ppm	ASTM D5185m		5	0	4
Molybdenum	ppm	ASTM D5185m		<1	<1	<1
Manganese	ppm	ASTM D5185m		11	9	9
Magnesium	ppm	ASTM D5185m		8	4	6
Calcium	ppm	ASTM D5185m		24	38	28
Phosphorus	ppm	ASTM D5185m		368	365	394
Zinc	ppm	ASTM D5185m		21	15	24
Sulfur	ppm	ASTM D5185m		21293	21186	19865
Visc @ 40°C	cSt	ASTM D445		151	150	148

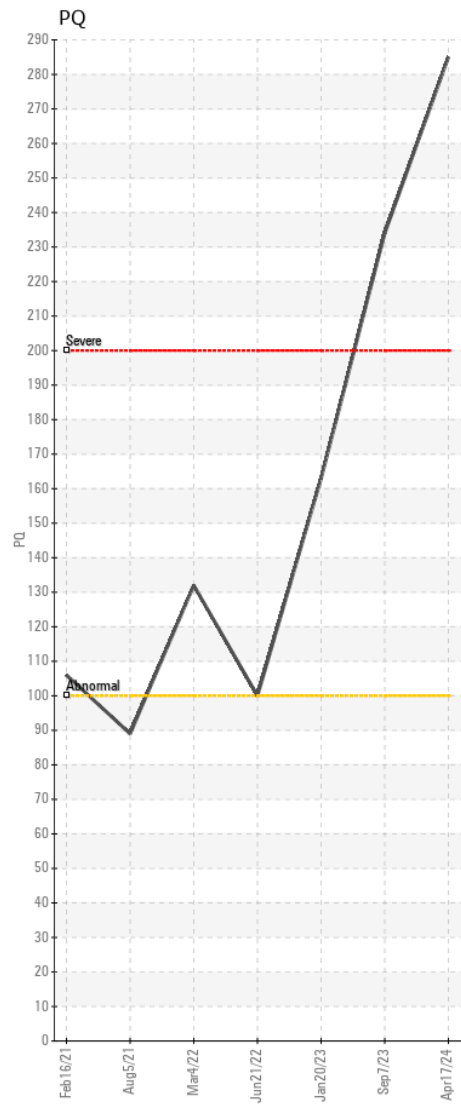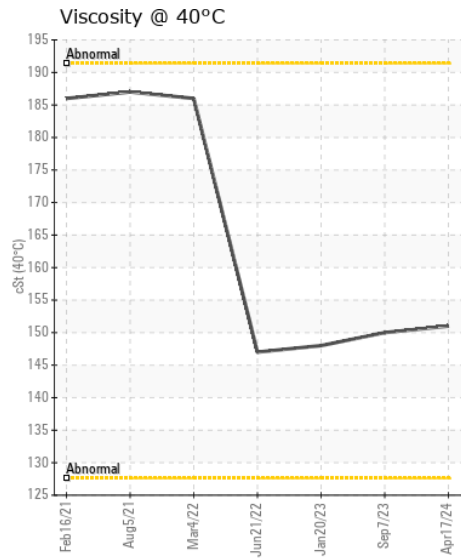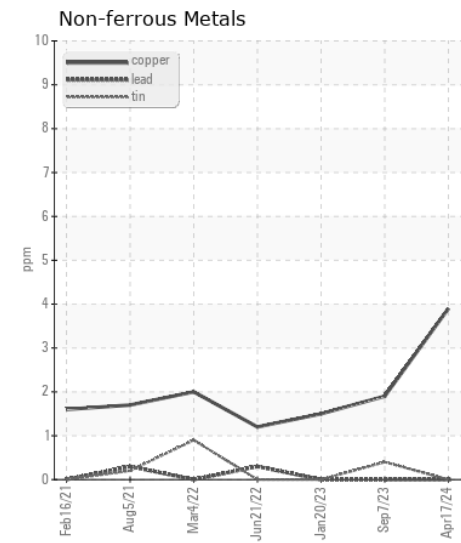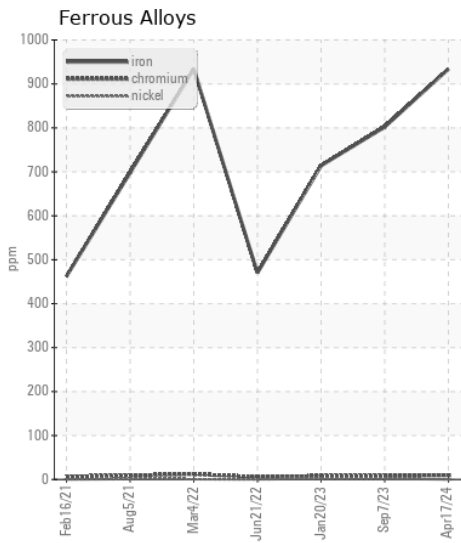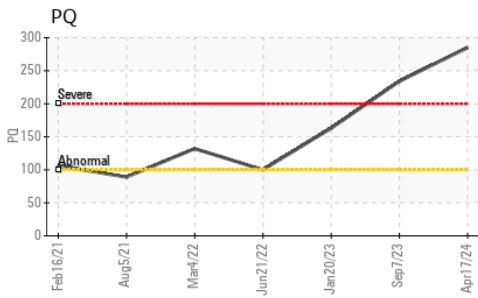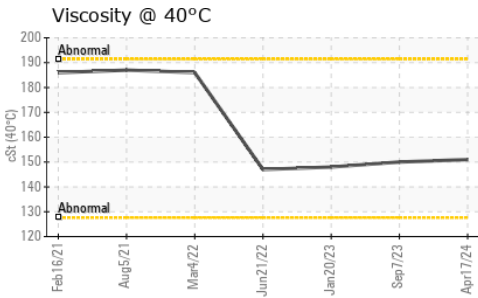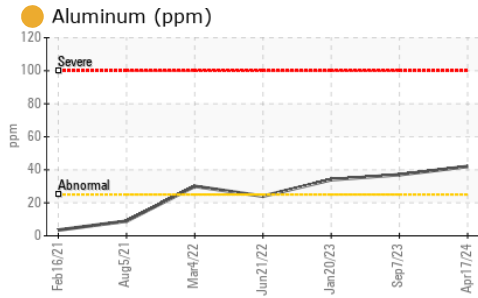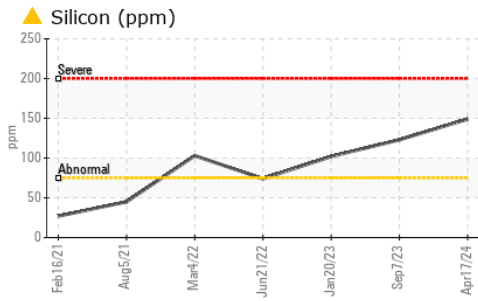

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0211174 **Received** : 22 Apr 2024
Lab Number : 06156269 **Tested** : 23 Apr 2024
Unique Number : 10991692 **Diagnosed** : 24 Apr 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

JRE - MANASSAS PARK
 9107 OWENS DRIVE
 MANASSAS PARK, VA
 US 20111

Contact: DON VEST
 dvest@jamesriverequipment.com
 T: (703)631-8500
 F: (703)631-4715

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)