



McCLUNG-LOGAN
EQUIPMENT COMPANY, INC.

OIL ANALYSIS REPORT

WEAR
CONTAMINATION
FLUID CONDITION

ATTENTION
ABNORMAL
NORMAL



Area

[W02008222]

Machine Id

VOLVO EC350 314382

Component

Rear Right Final Drive

Fluid

MOBIL MOBILUBE HD 85W140 (2 GAL)

RECOMMENDATION

We advise that you check all areas where dirt can enter the system. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. (Customer Sample Comment: W02008222)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ML0001076	VCP418320	---
Sample Date		Client Info		18 Apr 2024	03 Oct 2023	---
Machine Age	hrs	Client Info		2470	1989	---
Oil Age	hrs	Client Info		500	500	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				ABNORMAL	ABNORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	466	▲ 891	---
Chromium	ppm	ASTM D5185m	>10	10	▲ 18	---
Nickel	ppm	ASTM D5185m	>10	<1	1	---
Titanium	ppm	ASTM D5185m		6	4	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	50	● 37	---
Lead	ppm	ASTM D5185m	>25	<1	0	---
Copper	ppm	ASTM D5185m	>50	<1	<1	---
Tin	ppm	ASTM D5185m	>10	<1	0	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Silicon	ppm	ASTM D5185m	>75	▲ 195	▲ 200	---
Potassium	ppm	ASTM D5185m	>20	9	11	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	MODER	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	3	---
Boron	ppm	ASTM D5185m		122	123	---
Barium	ppm	ASTM D5185m		<1	0	---
Molybdenum	ppm	ASTM D5185m		8	0	---
Manganese	ppm	ASTM D5185m		4	8	---
Magnesium	ppm	ASTM D5185m		53	0	---
Calcium	ppm	ASTM D5185m		180	18	---
Phosphorus	ppm	ASTM D5185m		819	888	---
Zinc	ppm	ASTM D5185m		137	<1	---
Sulfur	ppm	ASTM D5185m		27178	19798	---
Visc @ 40°C	cSt	ASTM D445	328	256	299	---

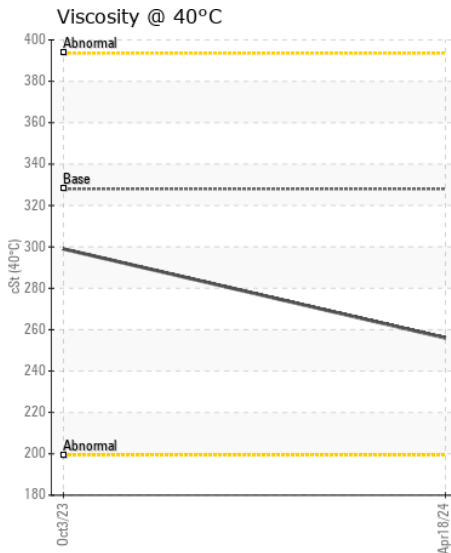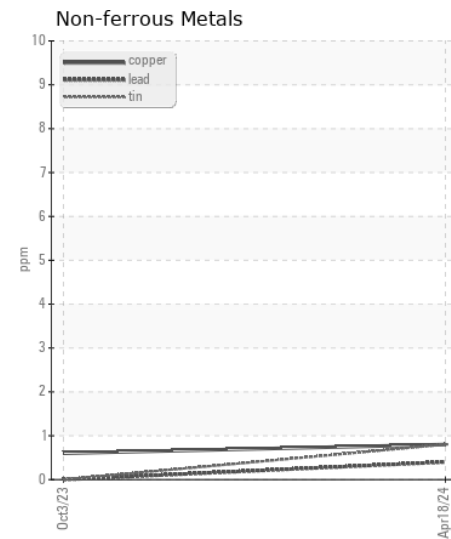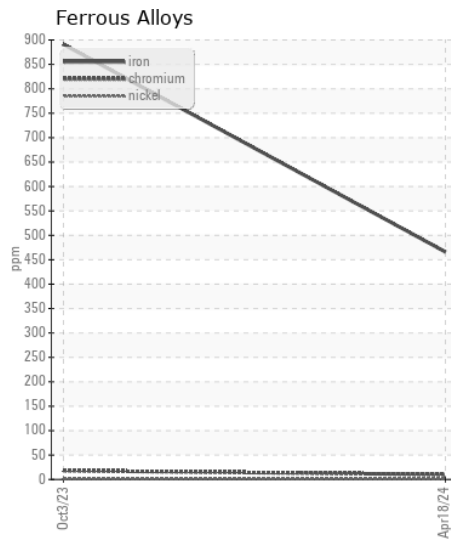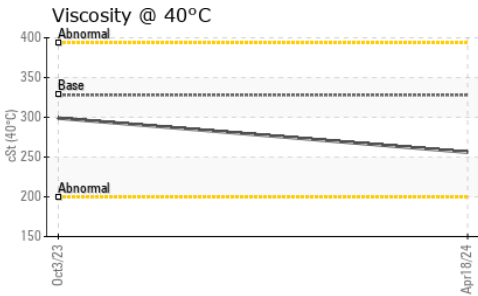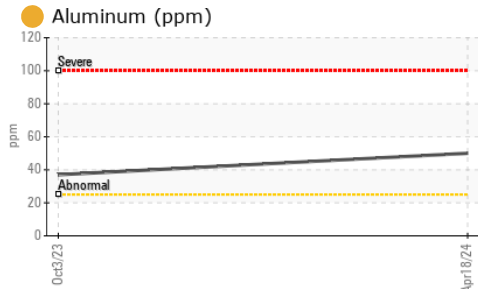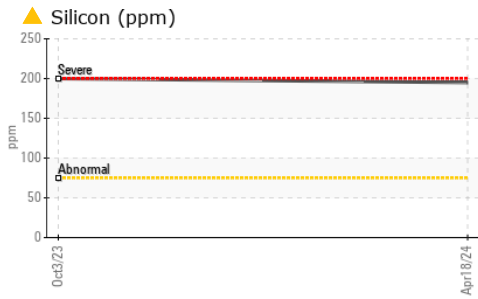

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ML0001076
Lab Number : 06156463
Unique Number : 10991886
Test Package : CONST

Received : 22 Apr 2024
Tested : 23 Apr 2024
Diagnosed : 24 Apr 2024 - Don Baldrige

MCCLUNG-LOGAN EQUIPMENT CO - MANASSAS
 8450 QUARRY ROAD
 MANASSAS, VA
 US 20110
 Contact: MIKE MAYHUGH
 MMAYHUGH@MCCLUNG-LOGAN.COM
 T: (703)393-7344
 F: (703)393-7844

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)