

Area
KEMP QUARRIES / HULBERT

Machine Id
OHT049

Component
Transmission (Manual)

Fluid
MOBIL MOBILTRANS HD 30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0109278	PCA0109163	PCA0086127
Sample Date		Client Info		13 Apr 2024	27 Jan 2024	23 Sep 2023
Machine Age	hrs	Client Info		9818	9318	8820
Oil Age	hrs	Client Info		8820	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Not Changed	Changed
Filter Changed		Client Info		Changed	Not Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	5	8	4
Chromium	ppm	ASTM D5185m	>5	<1	<1	0
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>7	0	0	0
Aluminum	ppm	ASTM D5185m	>25	1	2	<1
Lead	ppm	ASTM D5185m	>45	<1	0	0
Copper	ppm	ASTM D5185m	>225	<1	<1	<1
Tin	ppm	ASTM D5185m	>10	1	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>125	5	7	19
Potassium	ppm	ASTM D5185m	>20	<1	2	0
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	0	<1
Boron	ppm	ASTM D5185m		2	2	<1
Barium	ppm	ASTM D5185m		0	5	0
Molybdenum	ppm	ASTM D5185m		3	3	2
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m		40	59	29
Calcium	ppm	ASTM D5185m		3180	4352	3235
Phosphorus	ppm	ASTM D5185m		944	1247	878
Zinc	ppm	ASTM D5185m		1143	1626	1080
Sulfur	ppm	ASTM D5185m		4134	5630	3387
Visc @ 40°C	cSt	ASTM D445	100	84.8	84.3	87.2

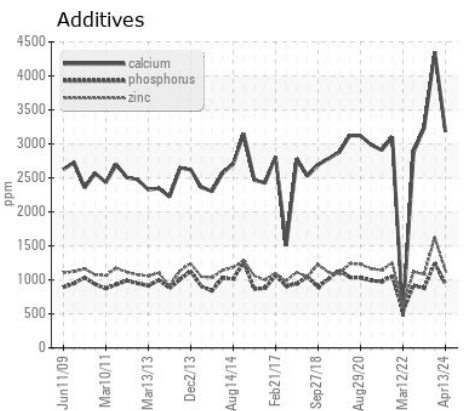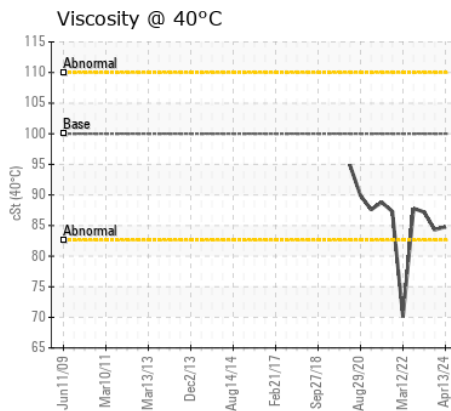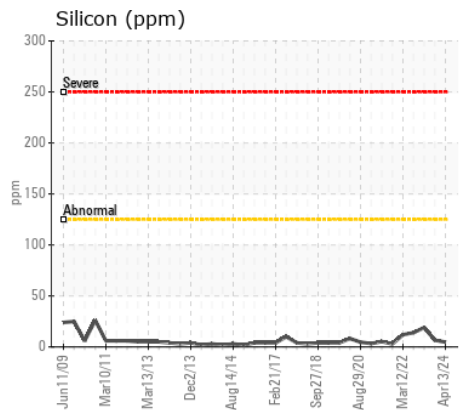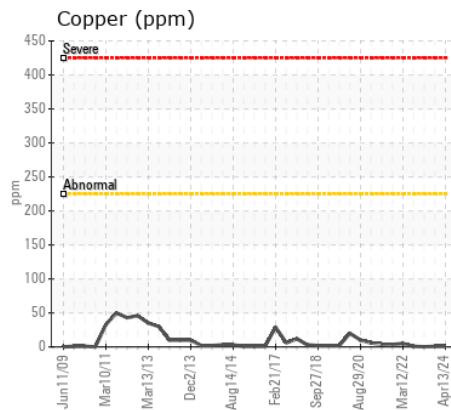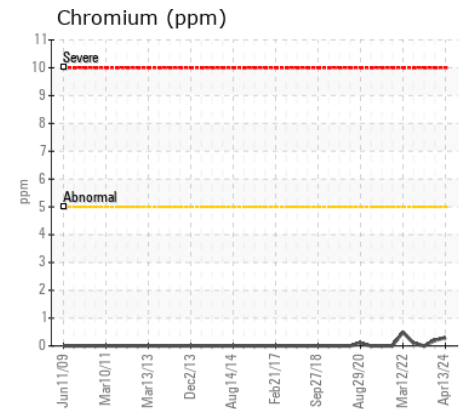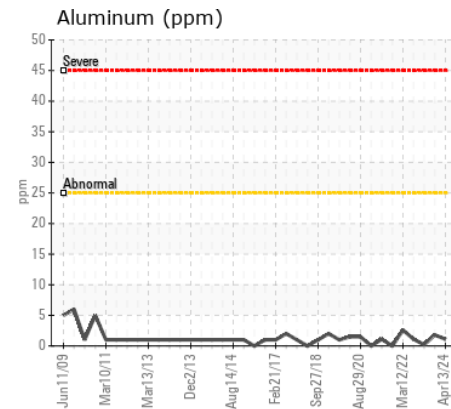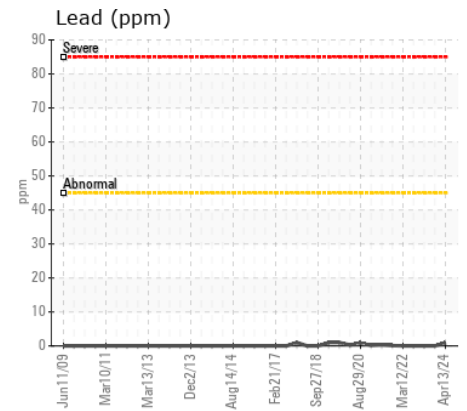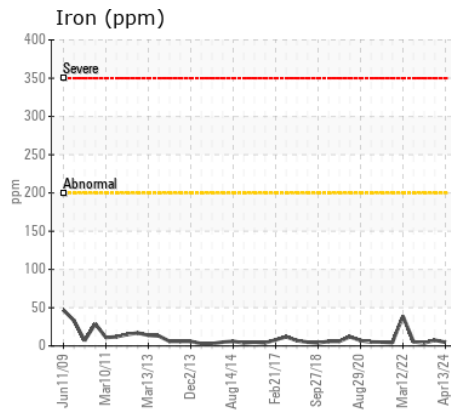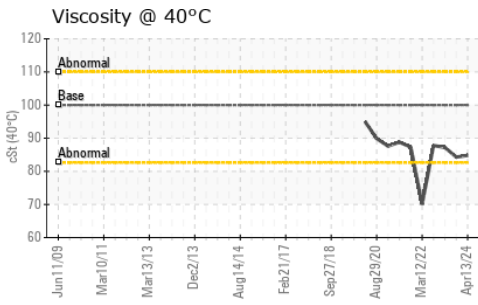

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : PCA0109278
 Lab Number : 06156468
 Unique Number : 10991891
 Test Package : MOB 1

Received : 22 Apr 2024
 Tested : 23 Apr 2024
 Diagnosed : 23 Apr 2024 - Wes Davis

Kemp Quarries - Kemp Stone - Hulbert
 17801 Hwy 80
 Hulbert, OK
 US 74441

Contact: hulbert@kempstone.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: