



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO A40G 352883
Component
Transmission (Auto)
Fluid
DEXRON III (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DEXRON III. Please confirm.

WEAR

All component wear rates are normal.

CONTAMINATION

There is no indication of any contamination in the fluid.

FLUID CONDITION





The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0004284	VCP422125	VCP422334
Sample Date		Client Info		17 Apr 2024	20 Jun 2023	31 Mar 2023
Machine Age	hrs	Client Info		4206	3494	304
Oil Age	hrs	Client Info		4206	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Not Changd
Filter Changed		Client Info		Changed	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

Iron	ppm	ASTM D5185m	>160	30	26	21
Chromium	ppm	ASTM D5185m	>5	<1	0	0
Nickel	ppm	ASTM D5185m	>5	2	3	2
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>50	19	14	12
Lead	ppm	ASTM D5185m	>50	<1	0	0
Copper	ppm	ASTM D5185m	>225	21	21	15
Tin	ppm	ASTM D5185m	>10	4	3	2
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

Silicon	ppm	ASTM D5185m	>20	7	6	8
Potassium	ppm	ASTM D5185m	>20	2	2	1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

Sodium	ppm	ASTM D5185m		4	0	3
Boron	ppm	ASTM D5185m		70	86	77
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	<1	<1
Manganese	ppm	ASTM D5185m		2	1	2
Magnesium	ppm	ASTM D5185m		2	<1	10
Calcium	ppm	ASTM D5185m		108	79	77
Phosphorus	ppm	ASTM D5185m		183	193	204
Zinc	ppm	ASTM D5185m		18	7	12
Sulfur	ppm	ASTM D5185m		2042	2029	2135
Visc @ 40°C	cSt	ASTM D445	35.0	28.1	27.9	27.6

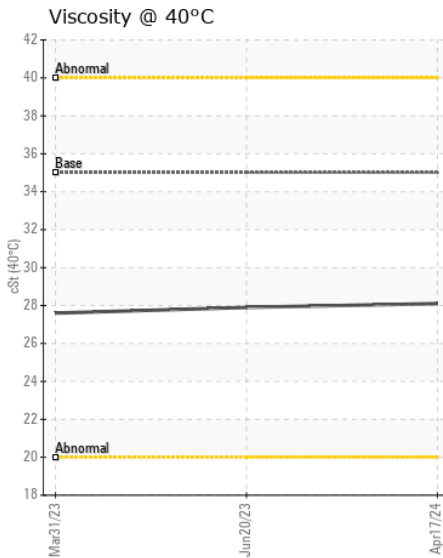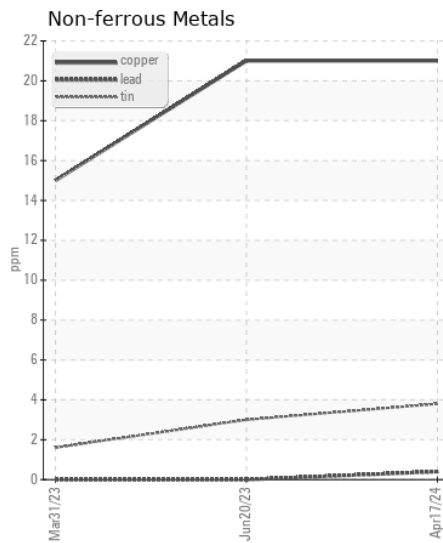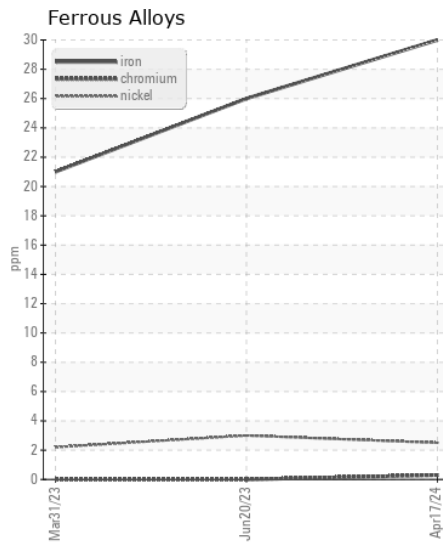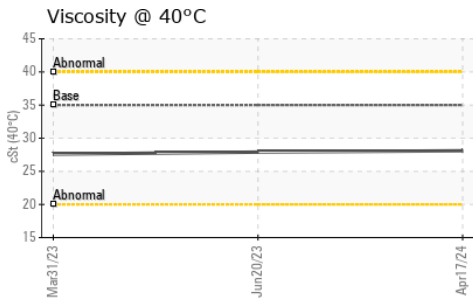

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0004284
Lab Number : 06156474
Unique Number : 10991897
Test Package : CONST

Received : 22 Apr 2024
Tested : 23 Apr 2024
Diagnosed : 23 Apr 2024 - Wes Davis

113 - ASCENDUM MACHINERY INC - GARNER
 3561 JONES SAUSAGE ROAD
 GARNER, NC
 US 27529

Contact: TRENT BROADWELL
 trent.broadwell@ascendummachinery.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (919)661-8817
 F: (919)661-9038