



VOLVO PENTA

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
VERHEEM [VERHEEM]
Machine Id
VOLVO PENTA A334204
Component
Starboard Diesel Engine
Fluid
{not provided} (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VPA053616	---	---
Sample Date		Client Info		19 Apr 2024	---	---
Machine Age	hrs	Client Info		143	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>80	56	---	---
Chromium	ppm	ASTM D5185m	>6	1	---	---
Nickel	ppm	ASTM D5185m	>2	<1	---	---
Titanium	ppm	ASTM D5185m	>2	<1	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>20	2	---	---
Lead	ppm	ASTM D5185m	>95	2	---	---
Copper	ppm	ASTM D5185m	>85	8	---	---
Tin	ppm	ASTM D5185m	>9	1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	13	---	---
Potassium	ppm	ASTM D5185m	>20	6	---	---
Fuel		WC Method	>4.0	<1.0	---	---
Water		WC Method	>0.1	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844		0.3	---	---
Nitration	Abs/cm	*ASTM D7624	>20	6.5	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.2	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m		150	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		9	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		118	---	---
Calcium	ppm	ASTM D5185m		2334	---	---
Phosphorus	ppm	ASTM D5185m		938	---	---
Zinc	ppm	ASTM D5185m		1191	---	---
Sulfur	ppm	ASTM D5185m		4814	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.4	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		8.6	---	---
Visc @ 100°C	cSt	ASTM D445		14.6	---	---

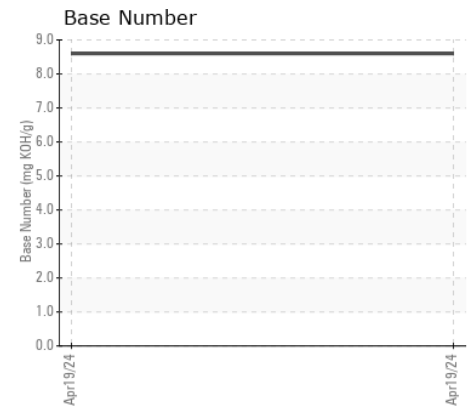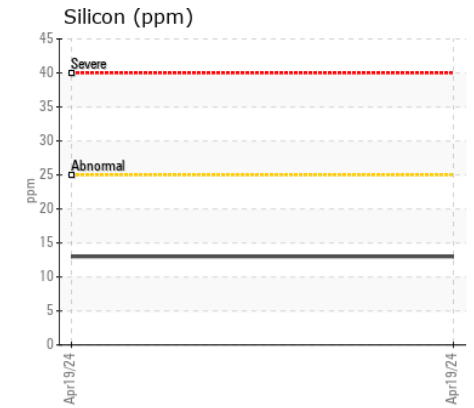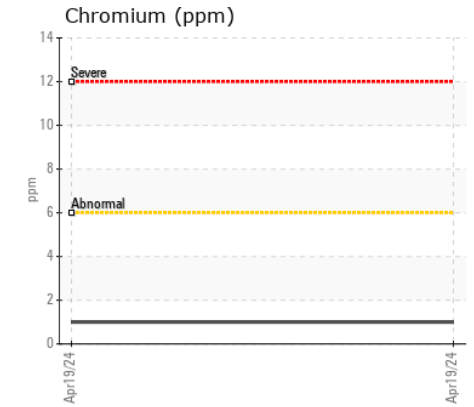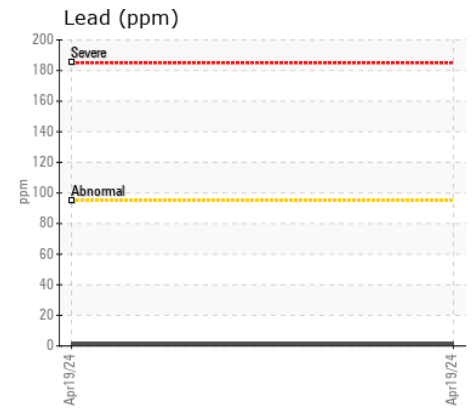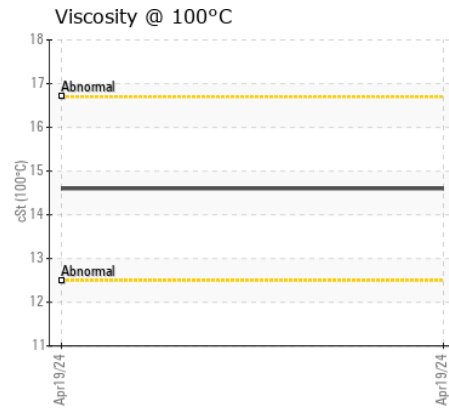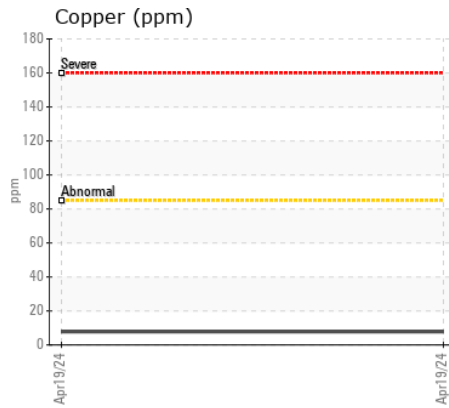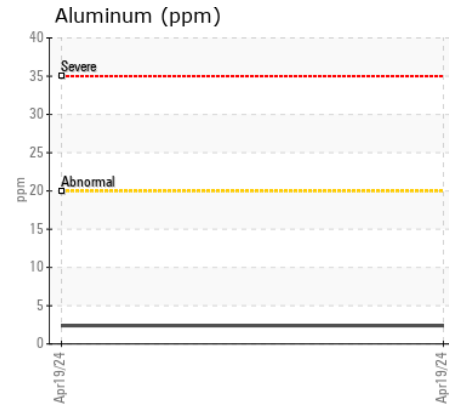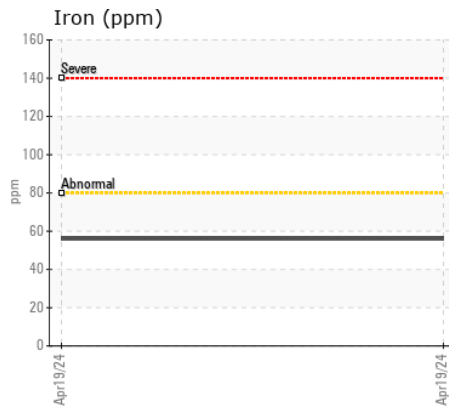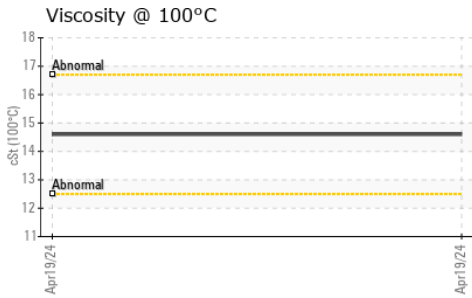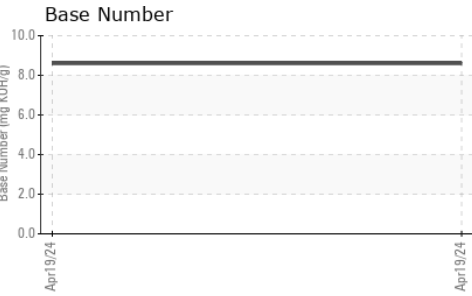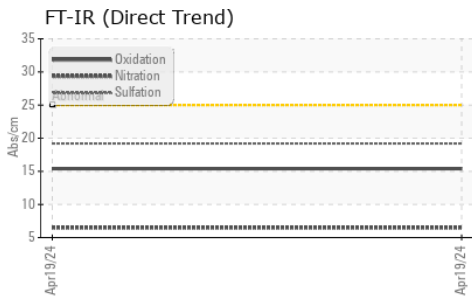

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VPA053616 **Received** : 22 Apr 2024
Lab Number : 06156577 **Tested** : 22 Apr 2024
Unique Number : 10992000 **Diagnosed** : 22 Apr 2024 - Doug Bogart
Test Package : MOB 1 (Additional Tests: TBN)

Harry's Marine Service LLC
 1141 N. Citrus St.
 Orange, CA
 US 92887
 Contact: TARAH AULD
 info@harrysmarine.com
 T: (714)771-7899
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)