



|                 |               |
|-----------------|---------------|
| WEAR            | <b>NORMAL</b> |
| CONTAMINATION   | <b>NORMAL</b> |
| FLUID CONDITION | <b>NORMAL</b> |

Machine Id  
**828098**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (40 QTS)**

**RECOMMENDATION**

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. No other corrective action is recommended at this time.

| Test           | UOM | Method      | Limit/Abn | Current            | History1    | History2    |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number  |     | Client Info |           | <b>GFL0110789</b>  | GFL0092875  | GFL0092856  |
| Sample Date    |     | Client Info |           | <b>17 Apr 2024</b> | 15 Jan 2024 | 23 Oct 2023 |
| Machine Age    | mls | Client Info |           | <b>89947</b>       | 81062       | 73577       |
| Oil Age        | mls | Client Info |           | <b>8885</b>        | 7485        | 8184        |
| Filter Age     | mls | Client Info |           | <b>8885</b>        | 7485        | 8184        |
| Oil Changed    |     | Client Info |           | <b>Changed</b>     | Changed     | Changed     |
| Filter Changed |     | Client Info |           | <b>Changed</b>     | Changed     | Changed     |
| Sample Status  |     |             |           | <b>NORMAL</b>      | NORMAL      | NORMAL      |

**WEAR**

All component wear rates are normal.

|              |        |             |      |              |      |      |
|--------------|--------|-------------|------|--------------|------|------|
| Iron         | ppm    | ASTM D5185m | >110 | <b>15</b>    | 12   | 21   |
| Chromium     | ppm    | ASTM D5185m | >4   | <b>1</b>     | <1   | 1    |
| Nickel       | ppm    | ASTM D5185m | >2   | <b>&lt;1</b> | 0    | <1   |
| Titanium     | ppm    | ASTM D5185m |      | <b>&lt;1</b> | 0    | <1   |
| Silver       | ppm    | ASTM D5185m | >2   | <b>&lt;1</b> | 0    | 0    |
| Aluminum     | ppm    | ASTM D5185m | >25  | <b>6</b>     | 4    | 7    |
| Lead         | ppm    | ASTM D5185m | >45  | <b>0</b>     | 0    | <1   |
| Copper       | ppm    | ASTM D5185m | >85  | <b>1</b>     | <1   | 1    |
| Tin          | ppm    | ASTM D5185m | >4   | <b>&lt;1</b> | 0    | <1   |
| Vanadium     | ppm    | ASTM D5185m |      | <b>&lt;1</b> | <1   | 0    |
| White Metal  | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | NONE |
| Yellow Metal | scalar | *Visual     | NONE | <b>NONE</b>  | NONE | NONE |

**CONTAMINATION**









Light fuel dilution occurring. No other contaminants were detected in the oil.

|                  |          |             |       |              |       |       |
|------------------|----------|-------------|-------|--------------|-------|-------|
| Silicon          | ppm      | ASTM D5185m | >30   | <b>5</b>     | 5     | 13    |
| Potassium        | ppm      | ASTM D5185m | >20   | <b>6</b>     | 5     | 9     |
| Fuel             | %        | ASTM D3524  | >5    | <b>1.4</b>   | <1.0  | <1.0  |
| Water            |          | WC Method   | >0.2  | <b>NEG</b>   | NEG   | NEG   |
| Glycol           |          | WC Method   |       | <b>NEG</b>   | NEG   | NEG   |
| Soot %           | %        | *ASTM D7844 | >3    | <b>0.5</b>   | 0.6   | 0.7   |
| Nitration        | Abs/cm   | *ASTM D7624 | >20   | <b>8.8</b>   | 8.4   | 8.4   |
| Sulfation        | Abs/.1mm | *ASTM D7415 | >30   | <b>19.6</b>  | 19.3  | 19.8  |
| Silt             | scalar   | *Visual     | NONE  | <b>NONE</b>  | NONE  | NONE  |
| Debris           | scalar   | *Visual     | NONE  | <b>NONE</b>  | NONE  | NONE  |
| Sand/Dirt        | scalar   | *Visual     | NONE  | <b>NONE</b>  | NONE  | NONE  |
| Appearance       | scalar   | *Visual     | NORML | <b>NORML</b> | NORML | NORML |
| Odor             | scalar   | *Visual     | NORML | <b>NORML</b> | NORML | NORML |
| Emulsified Water | scalar   | *Visual     | >0.2  | <b>NEG</b>   | NEG   | NEG   |

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

|                  |          |             |      |              |      |      |
|------------------|----------|-------------|------|--------------|------|------|
| Sodium           | ppm      | ASTM D5185m |      | <b>2</b>     | <1   | 2    |
| Boron            | ppm      | ASTM D5185m | 0    | <b>16</b>    | 5    | 10   |
| Barium           | ppm      | ASTM D5185m | 0    | <b>&lt;1</b> | 0    | 0    |
| Molybdenum       | ppm      | ASTM D5185m | 60   | <b>52</b>    | 54   | 66   |
| Manganese        | ppm      | ASTM D5185m | 0    | <b>&lt;1</b> | 0    | <1   |
| Magnesium        | ppm      | ASTM D5185m | 1010 | <b>877</b>   | 917  | 977  |
| Calcium          | ppm      | ASTM D5185m | 1070 | <b>1210</b>  | 1049 | 1240 |
| Phosphorus       | ppm      | ASTM D5185m | 1150 | <b>918</b>   | 1017 | 1172 |
| Zinc             | ppm      | ASTM D5185m | 1270 | <b>1192</b>  | 1173 | 1309 |
| Sulfur           | ppm      | ASTM D5185m | 2060 | <b>2940</b>  | 2906 | 3776 |
| Oxidation        | Abs/.1mm | *ASTM D7414 | >25  | <b>15.4</b>  | 15.6 | 15.4 |
| Base Number (BN) | mg KOH/g | ASTM D2896  | 9.8  | <b>7.8</b>   | 8.3  | 8.4  |
| Visc @ 100°C     | cSt      | ASTM D445   | 15.4 | <b>12.4</b>  | 13.0 | 13.6 |

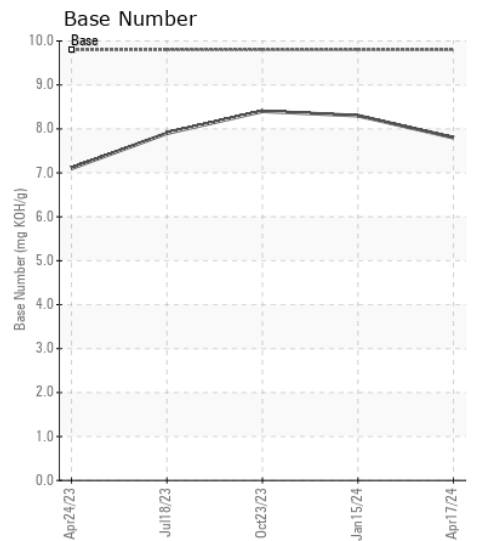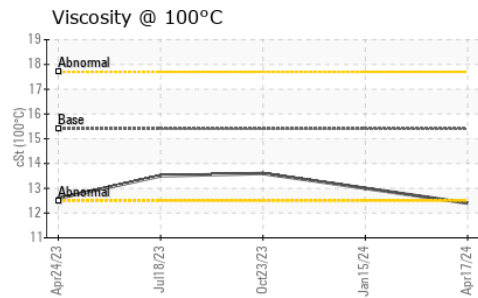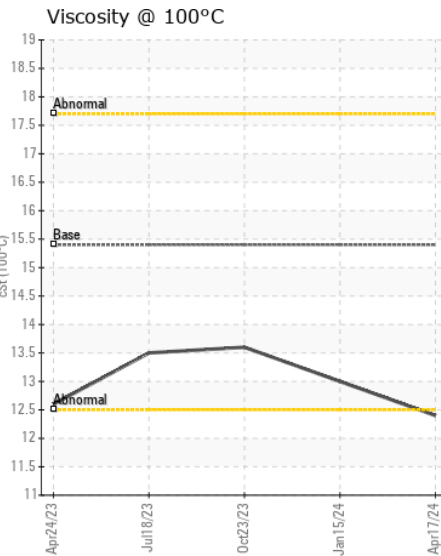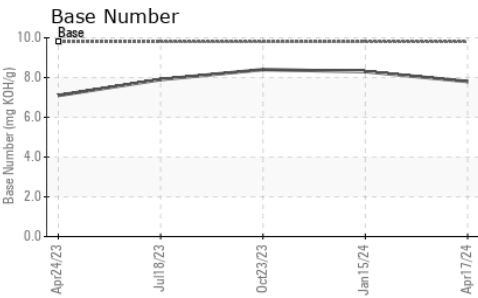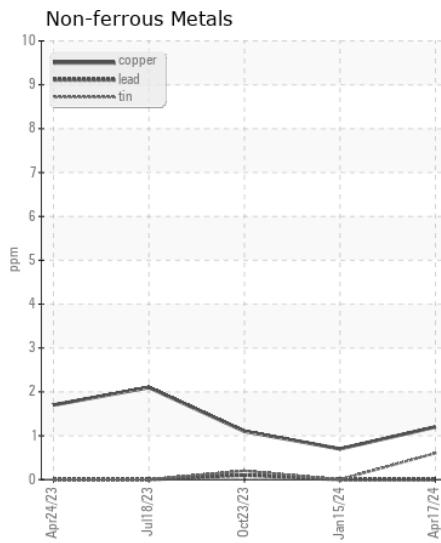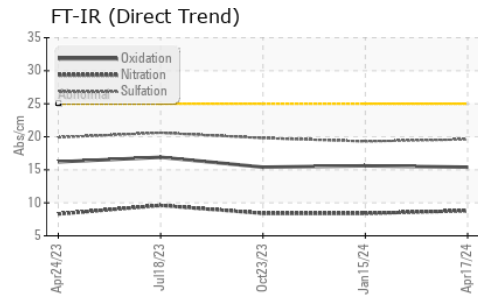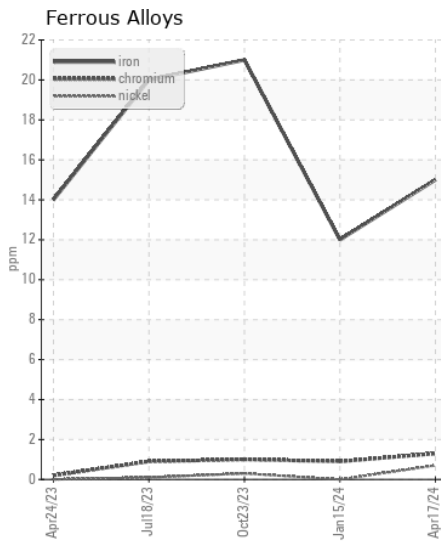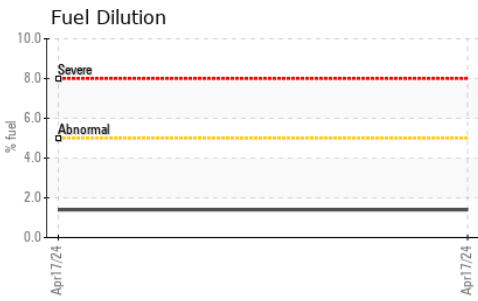

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0110789  
**Lab Number** : 06156585  
**Unique Number** : 10992008  
**Test Package** : FLEET ( Additional Tests: FuelDilution, PercentFuel )

**Received** : 22 Apr 2024  
**Tested** : 25 Apr 2024  
**Diagnosed** : 25 Apr 2024 - Wes Davis

**GFL Environmental - 411 - Kingsford HC**  
 1001 E Blvd  
 Kingsford, MI  
 US 49802  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: