



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
PETERBILT 182356

Component
Front Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 15W40 (44 QTS)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0934383	WC0861045	WC0520893
Sample Date		Client Info		17 Apr 2024	04 Oct 2023	28 Jan 2021
Machine Age	mls	Client Info		65531	61898	43710
Oil Age	mls	Client Info		3633	3831	4489
Filter Age	mls	Client Info		3633	3831	4489
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>110	17	20	8
Chromium	ppm	ASTM D5185m	>4	1	<1	<1
Nickel	ppm	ASTM D5185m	>2	<1	0	1
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>25	3	2	2
Lead	ppm	ASTM D5185m	>45	<1	0	0
Copper	ppm	ASTM D5185m	>85	3	9	2
Tin	ppm	ASTM D5185m	>4	<1	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>30	6	6	6
Potassium	ppm	ASTM D5185m	>20	6	4	12
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	0.0
Soot %	%	*ASTM D7844	>3	0.3	0.4	0.3
Nitration	Abs/cm	*ASTM D7624	>20	9.4	9.4	9.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.9	21.7	20.4
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	4	6	5
Boron	ppm	ASTM D5185m	250	51	96	40
Barium	ppm	ASTM D5185m	10	<1	0	<1
Molybdenum	ppm	ASTM D5185m	100	62	67	90
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	450	648	730	129
Calcium	ppm	ASTM D5185m	3000	1358	1438	2287
Phosphorus	ppm	ASTM D5185m	1150	813	937	986
Zinc	ppm	ASTM D5185m	1350	1027	1122	1186
Sulfur	ppm	ASTM D5185m	4250	2849	2980	2950
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.4	17.9	15.6
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	7.9	7.6	6.5
Visc @ 100°C	cSt	ASTM D445	14.4	13.4	13.7	14.2


FT-IR (Direct Trend)

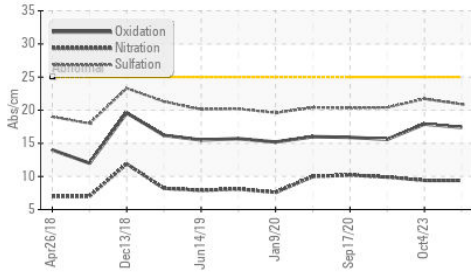


Base Number

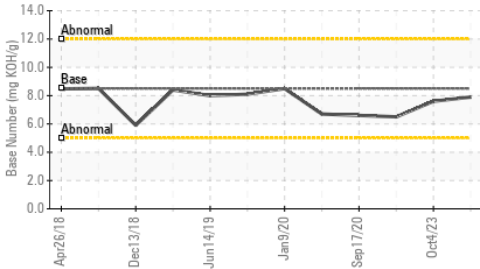


Viscosity @ 100°C

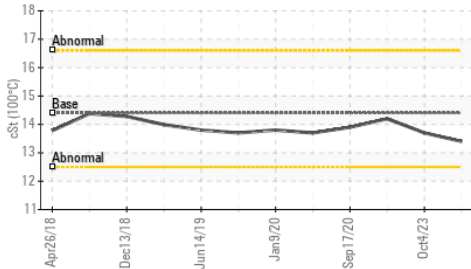


Ferrous Alloys

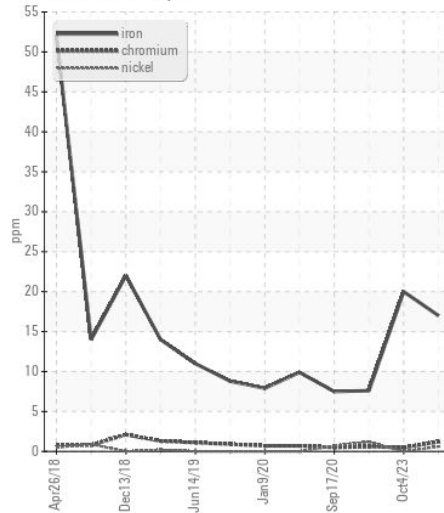


Non-ferrous Metals

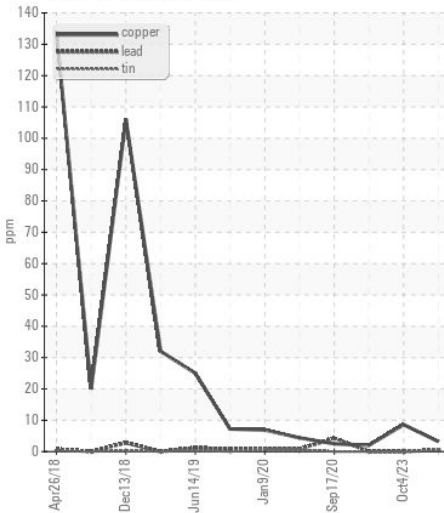

Viscosity @ 100°C

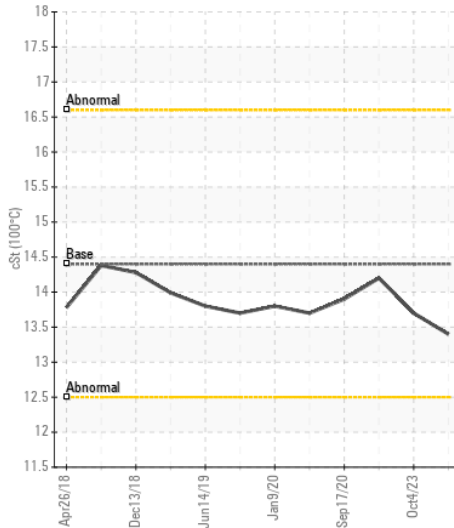

Base Number

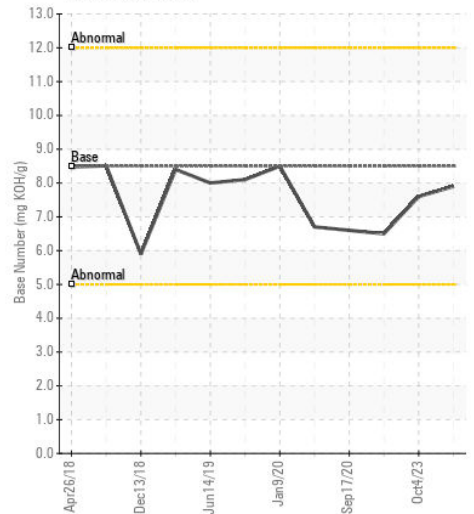

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0934383

Lab Number : 06156615

Unique Number : 10992038

Test Package : FLEET

Received : 22 Apr 2024

Tested : 23 Apr 2024

Diagnosed : 23 Apr 2024 - Wes Davis

CITY OF GREENSBORO
401 PATTON AVE - BUILDING H
GREENSBORO, NC
US 27406

Contact: JERRY GUNTER
jerry.gunter@greensboro-nc.gov

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: x:

F: x: