



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
53.177L []
 Component
Diesel Engine
 Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0864392	WC0864362	WC0864269
Sample Date		Client Info		10 Apr 2024	28 Feb 2024	06 Dec 2023
Machine Age	hrs	Client Info		665	573	369
Oil Age	hrs	Client Info		665	369	369
Filter Age	hrs	Client Info		665	0	0
Oil Changed		Client Info		Changed	N/A	N/A
Filter Changed		Client Info		Changed	N/A	N/A
Sample Status				NORMAL	NORMAL	MARGINAL

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	4	3	16
Chromium	ppm	ASTM D5185m	>20	<1	0	1
Nickel	ppm	ASTM D5185m	>4	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>3	<1	0	0
Aluminum	ppm	ASTM D5185m	>20	3	<1	2
Lead	ppm	ASTM D5185m	>40	<1	0	0
Copper	ppm	ASTM D5185m	>330	2	0	10
Tin	ppm	ASTM D5185m	>15	<1	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	6	4	12
Potassium	ppm	ASTM D5185m	>20	2	0	<1
Fuel		WC Method	>5	<1.0	<1.0	▲ 2.6
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	0.1	0.2
Nitration	Abs/cm	*ASTM D7624	>20	6.3	6.9	7.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.2	22.4	21.9
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<1	<1	3
Boron	ppm	ASTM D5185m		73	62	35
Barium	ppm	ASTM D5185m		0	2	0
Molybdenum	ppm	ASTM D5185m		41	38	38
Manganese	ppm	ASTM D5185m		<1	0	2
Magnesium	ppm	ASTM D5185m		478	512	514
Calcium	ppm	ASTM D5185m		1621	1657	1794
Phosphorus	ppm	ASTM D5185m		760	775	817
Zinc	ppm	ASTM D5185m		897	924	1068
Sulfur	ppm	ASTM D5185m		2634	2238	3135
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.8	21.0	19.8
Base Number (BN)	mg KOH/g	ASTM D2896		10.0	9.3	9.7
Visc @ 100°C	cSt	ASTM D445		13.1	12.6	10.7

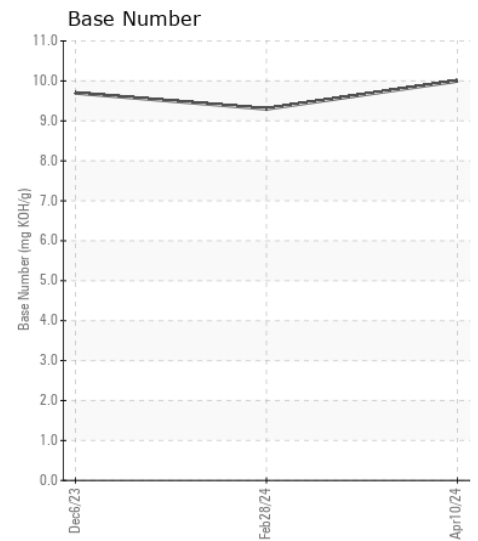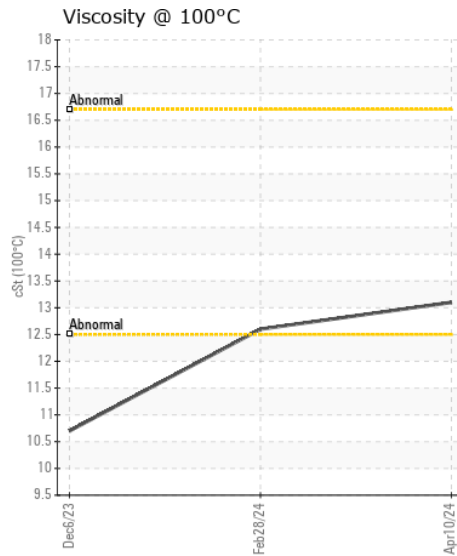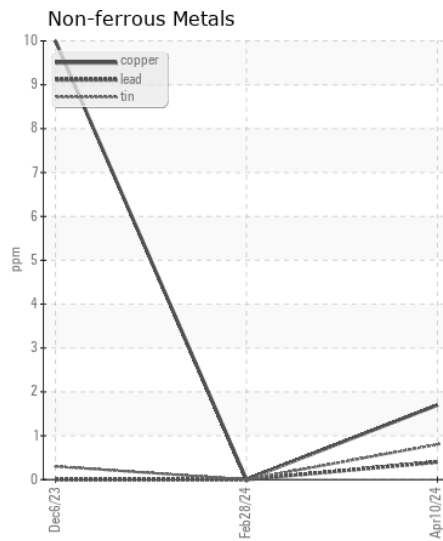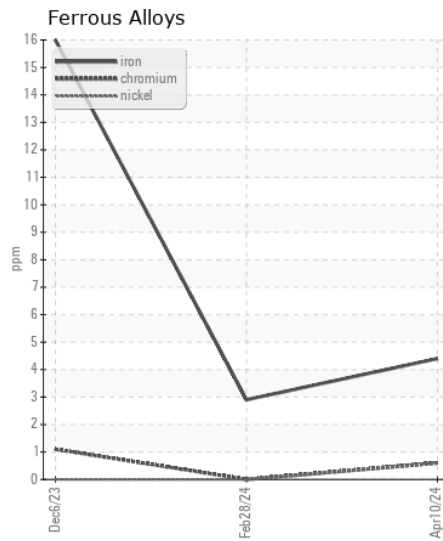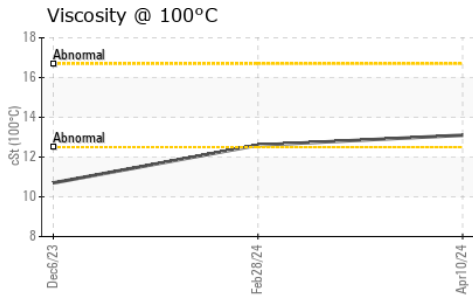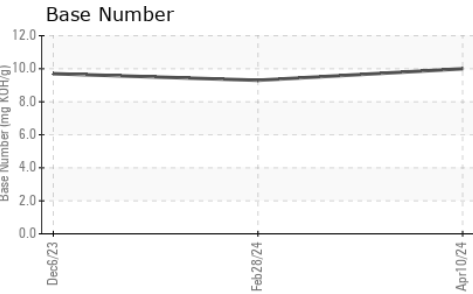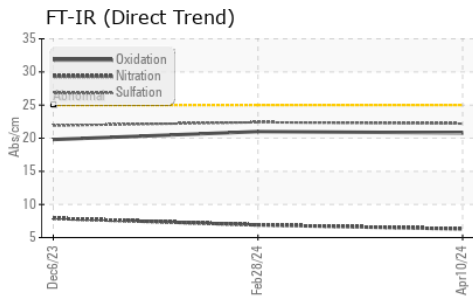

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0864392

Lab Number : 06156665

Unique Number : 10992088

Test Package : CONST (Additional Tests: TBN)

Received : 22 Apr 2024

Tested : 23 Apr 2024

Diagnosed : 23 Apr 2024 - Wes Davis

SHERWOOD CONSTRUCTION CO INC

3219 WEST MAY ST

WICHITA, KS

US 67213

Contact: LOUIS BRESHEARS

louis.breshears@sherwood.net

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)