



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**FREIGHTLINER 19952**  
Component  
**Diesel Engine**  
Fluid  
**SHELL 15W40 (44 QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0906442</b>	WC0847833	WC0871944
Sample Date		Client Info		<b>05 Apr 2024</b>	12 Feb 2024	22 Dec 2023
Machine Age	mls	Client Info		<b>631259</b>	622941	616647
Oil Age	mls	Client Info		<b>9011</b>	10941	29732
Filter Age	mls	Client Info		<b>9011</b>	10941	29732
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>80	<b>5</b>	5	6
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>4</b>	3	4
Lead	ppm	ASTM D5185m	>30	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>150	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	<b>5</b>	4	5
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	0	3
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.3</b>	6.0	6.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.6</b>	21.2	20.6
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>150	<b>&lt;1</b>	<1	2
Boron	ppm	ASTM D5185m		<b>287</b>	377	310
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>88</b>	79	80
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m		<b>244</b>	380	531
Calcium	ppm	ASTM D5185m		<b>1425</b>	1279	1287
Phosphorus	ppm	ASTM D5185m		<b>990</b>	961	1090
Zinc	ppm	ASTM D5185m		<b>1113</b>	1175	1293
Sulfur	ppm	ASTM D5185m		<b>3451</b>	3067	3350
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>13.7</b>	15.3	14.7
Base Number (BN)	mg KOH/g	ASTM D2896		<b>7.0</b>	7.3	7.7
Visc @ 100°C	cSt	ASTM D445		<b>13.6</b>	13.8	13.7


**FT-IR (Direct Trend)**

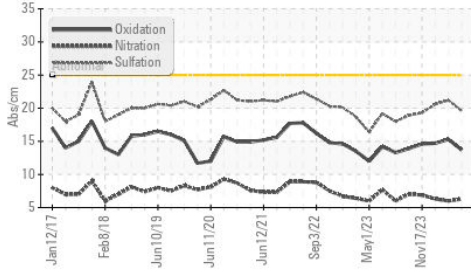


**Base Number**

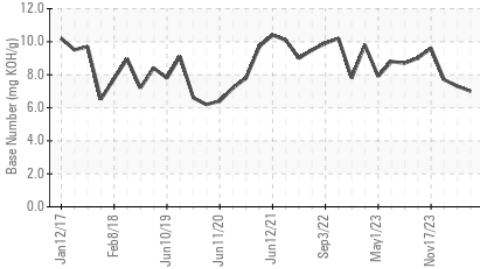


**Viscosity @ 100°C**

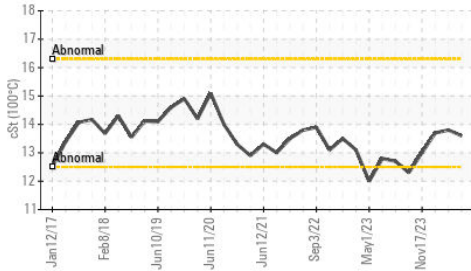


**Ferrous Alloys**

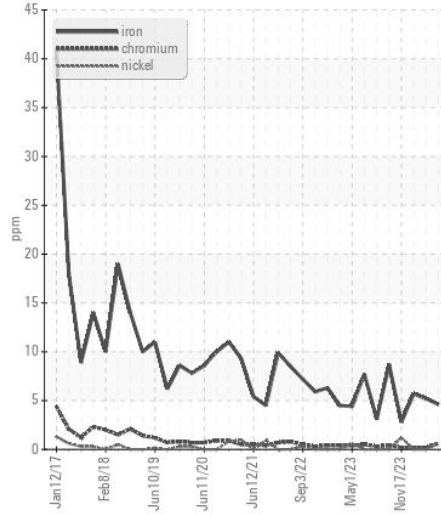


**Non-ferrous Metals**

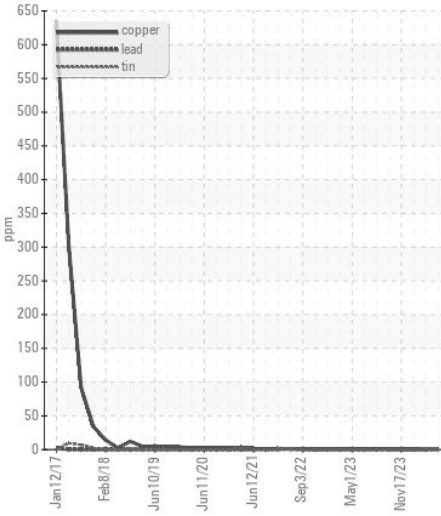

**Viscosity @ 100°C**

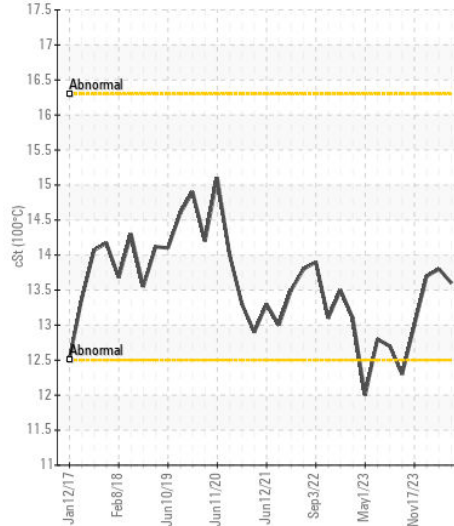

**Base Number**

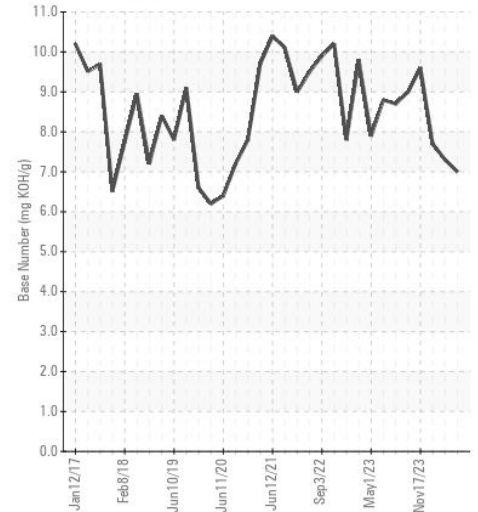

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0906442  
**Lab Number** : 06156708  
**Unique Number** : 10992131  
**Test Package** : FLEET

**Received** : 22 Apr 2024  
**Tested** : 23 Apr 2024  
**Diagnosed** : 23 Apr 2024 - Wes Davis

**SALEM NATIONALEASE CORPORATION**  
 198 PARK PLAZA DRIVE  
 WINSTON SALEM, NC  
 US 27105

Contact: Audrey Hopkins  
 Audrey.Hopkins@salemcorp.com

T: (336)767-9642

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: x: