



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**722058**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

**RECOMMENDATION**

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. ( Customer Sample Comment: Serviced )

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0116277</b>	GFL0094890	---
Sample Date		Client Info		<b>18 Apr 2024</b>	08 Feb 2024	---
Machine Age	hrs	Client Info		<b>3952</b>	3630	---
Oil Age	hrs	Client Info		<b>322</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Changed	---
Filter Changed		Client Info		<b>Changed</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>80	<b>10</b>	12	---
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	---
Aluminum	ppm	ASTM D5185m	>30	<b>5</b>	8	---
Lead	ppm	ASTM D5185m	>30	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m	>150	<b>1</b>	0	---
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

**CONTAMINATION**








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	<b>5</b>	9	---
Potassium	ppm	ASTM D5185m	>20	<b>6</b>	7	---
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.5</b>	7.2	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>18.5</b>	22.4	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>1</b>	3	---
Boron	ppm	ASTM D5185m	0	<b>9</b>	51	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	60	<b>59</b>	42	---
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	1010	<b>838</b>	500	---
Calcium	ppm	ASTM D5185m	1070	<b>1109</b>	1572	---
Phosphorus	ppm	ASTM D5185m	1150	<b>1071</b>	776	---
Zinc	ppm	ASTM D5185m	1270	<b>1173</b>	897	---
Sulfur	ppm	ASTM D5185m	2060	<b>3333</b>	2494	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.4</b>	20.5	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>8.9</b>	9.6	---
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.4</b>	13.1	---

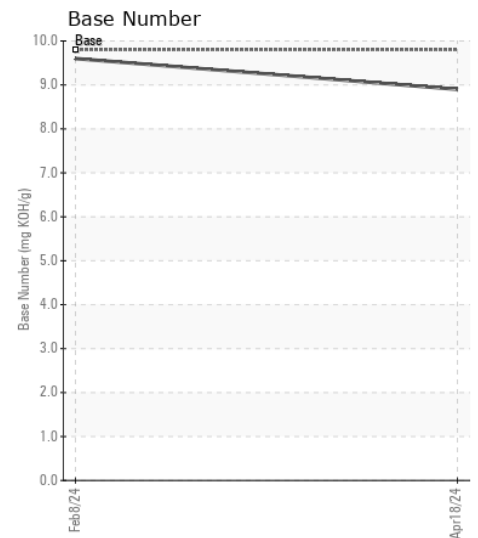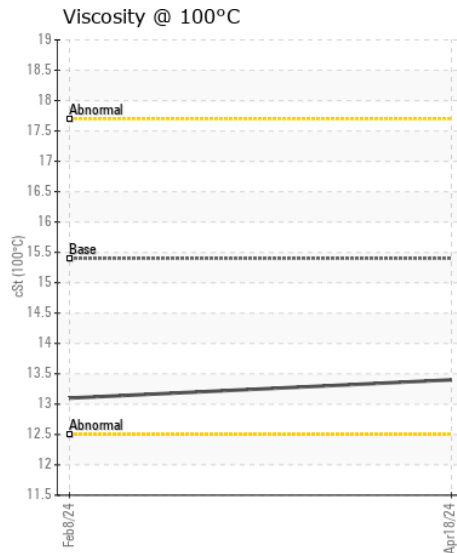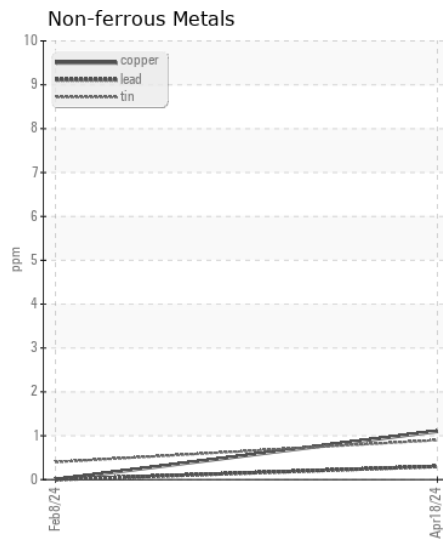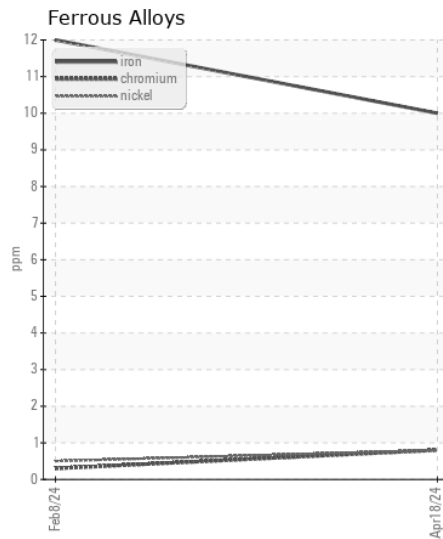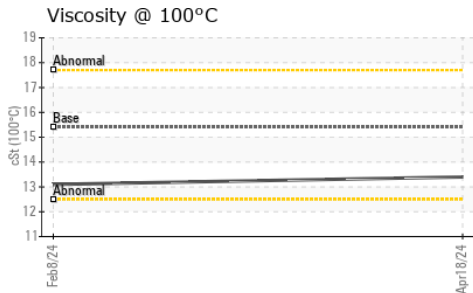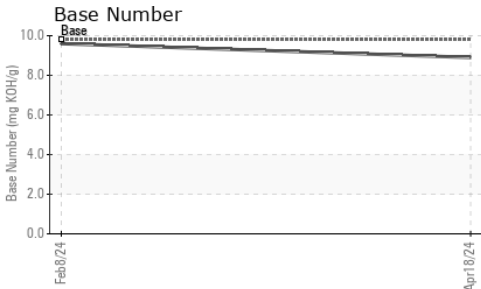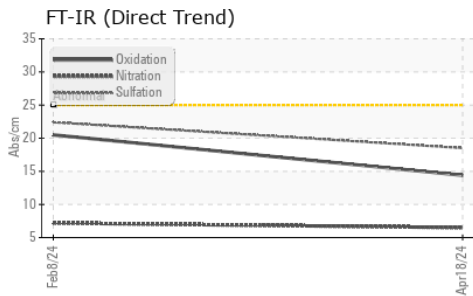

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0116277  
**Lab Number** : 06156743  
**Unique Number** : 10992166  
**Test Package** : FLEET

**Received** : 22 Apr 2024  
**Tested** : 23 Apr 2024  
**Diagnosed** : 24 Apr 2024 - Sean Felton

**GFL Environmental - 625 - Harrison Hauling**  
 4102 Industrial Pkwy  
 Harrison, MI  
 US 48625

Contact: Glenda Standen  
 gstanden@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: