



WEAR	<b>ABNORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**913178**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

**RECOMMENDATION**

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0119387</b>	GFL0115369	GFL0110915
Sample Date		Client Info		<b>18 Apr 2024</b>	20 Mar 2024	07 Feb 2024
Machine Age	hrs	Client Info		<b>2709</b>	2547	2394
Oil Age	hrs	Client Info		<b>162</b>	153	72
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>ABNORMAL</b>	NORMAL	NORMAL

**WEAR**

Exhaust valve wear is indicated.

Iron	ppm	ASTM D5185m	>100	<b>9</b>	6	14
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>▲ 6</b>	<1	2
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m	>20	<b>3</b>	1	2
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>330	<b>2</b>	3	3
Tin	ppm	ASTM D5185m	>15	<b>1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	<b>7</b>	4	5
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	3	4
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.2	0.5
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.7</b>	7.5	10.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.2</b>	19.3	21.5
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>1</b>	3	4
Boron	ppm	ASTM D5185m	0	<b>9</b>	13	3
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>62</b>	62	59
Manganese	ppm	ASTM D5185m	0	<b>1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	1010	<b>904</b>	1006	1012
Calcium	ppm	ASTM D5185m	1070	<b>1061</b>	1180	1050
Phosphorus	ppm	ASTM D5185m	1150	<b>1094</b>	1084	1081
Zinc	ppm	ASTM D5185m	1270	<b>1211</b>	1348	1278
Sulfur	ppm	ASTM D5185m	2060	<b>3310</b>	3927	3015
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.5</b>	15.5	17.7
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>7.5</b>	8.0	6.2
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.3</b>	14.4	14.2


▲ Ferrous Alloys

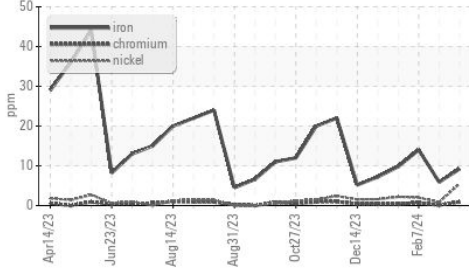


▲ Ferrous Alloys

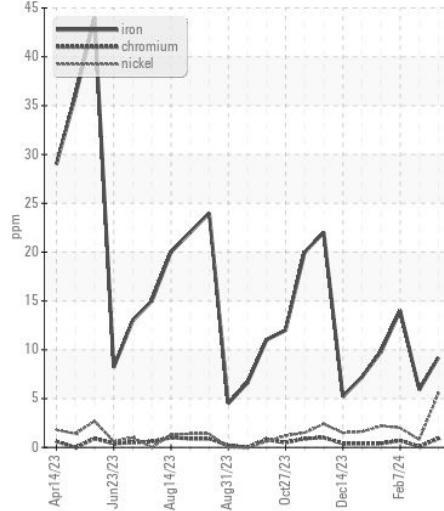


FT-IR (Direct Trend)

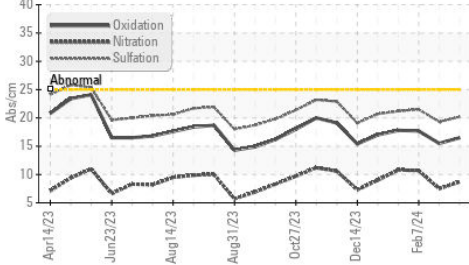


Non-ferrous Metals

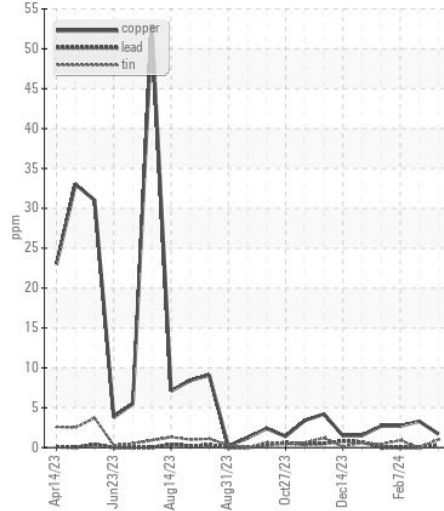


Base Number

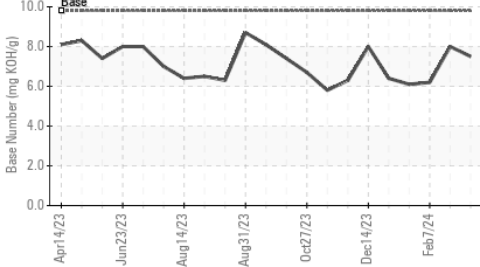


Viscosity @ 100°C

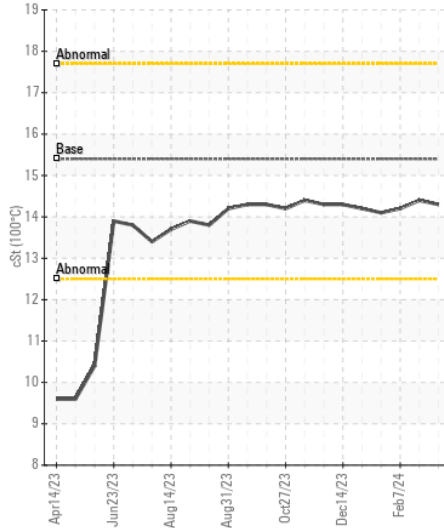

Viscosity @ 100°C

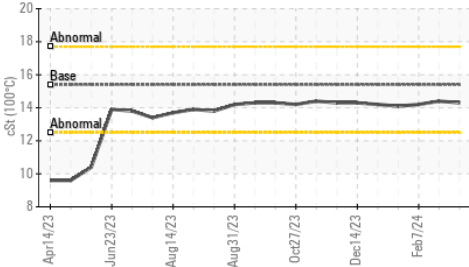

Base Number

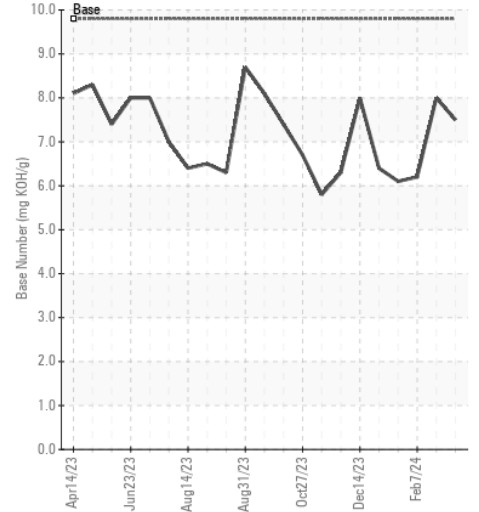

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0119387  
**Lab Number** : 06156774  
**Unique Number** : 10992197  
**Test Package** : FLEET

**GFL Environmental - 814 - Little Rock Hauling**  
 4005 Hwy 161 N.  
 Little Rock, AR  
 US 72117  
 Contact: Brad Koenig  
 bkoenig@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: