



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL



Area
Mobile Fleet
Machine Id
348 348
Component
Rear Left Final Drive
Fluid
MOBIL MOBILTRANS HD 50 (10 GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0918646	WC0771060	WC0784712
Sample Date		Client Info		06 Apr 2024	07 Jul 2023	28 Feb 2023
Machine Age	hrs	Client Info		31991	30782	30158
Oil Age	hrs	Client Info		1209	2188	1564
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		N/A	Not Changd	Not Changd
Sample Status				ABNORMAL	NORMAL	ATTENTION

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>800	427	72	60
Chromium	ppm	ASTM D5185m	>10	3	<1	<1
Nickel	ppm	ASTM D5185m	>5	1	0	0
Titanium	ppm	ASTM D5185m	>15	1	<1	<1
Silver	ppm	ASTM D5185m	>2	<1	0	<1
Aluminum	ppm	ASTM D5185m	>75	3	3	2
Lead	ppm	ASTM D5185m	>10	<1	<1	0
Copper	ppm	ASTM D5185m	>75	17	17	13
Tin	ppm	ASTM D5185m	>8	<1	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION









There is a high amount of particulates present in the oil.

Silicon	ppm	ASTM D5185m	>400	14	9	9
Potassium	ppm	ASTM D5185m	>20	2	2	0
Water		WC Method	>0.2	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>20000	▲ 20070	6777	12919
Particles >6µm		ASTM D7647	>5000	▲ 10933	3692	7038
Particles >14µm		ASTM D7647	>640	▲ 1861	628	1198
Particles >21µm		ASTM D7647	>160	▲ 627	212	403
Particles >38µm		ASTM D7647	>40	▲ 97	33	62
Particles >71µm		ASTM D7647	>10	10	3	6
Oil Cleanliness		ISO 4406 (c)	>21/19/16	▲ 22/21/18	20/19/16	21/20/17
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	0	5
Boron	ppm	ASTM D5185m		3	11	5
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		6	5	5
Manganese	ppm	ASTM D5185m		5	1	<1
Magnesium	ppm	ASTM D5185m		27	24	29
Calcium	ppm	ASTM D5185m		3004	3081	3066
Phosphorus	ppm	ASTM D5185m		952	963	903
Zinc	ppm	ASTM D5185m		1065	1116	1080
Sulfur	ppm	ASTM D5185m		12868	12396	12310
Visc @ 40°C	cSt	ASTM D445	195	173	176	175

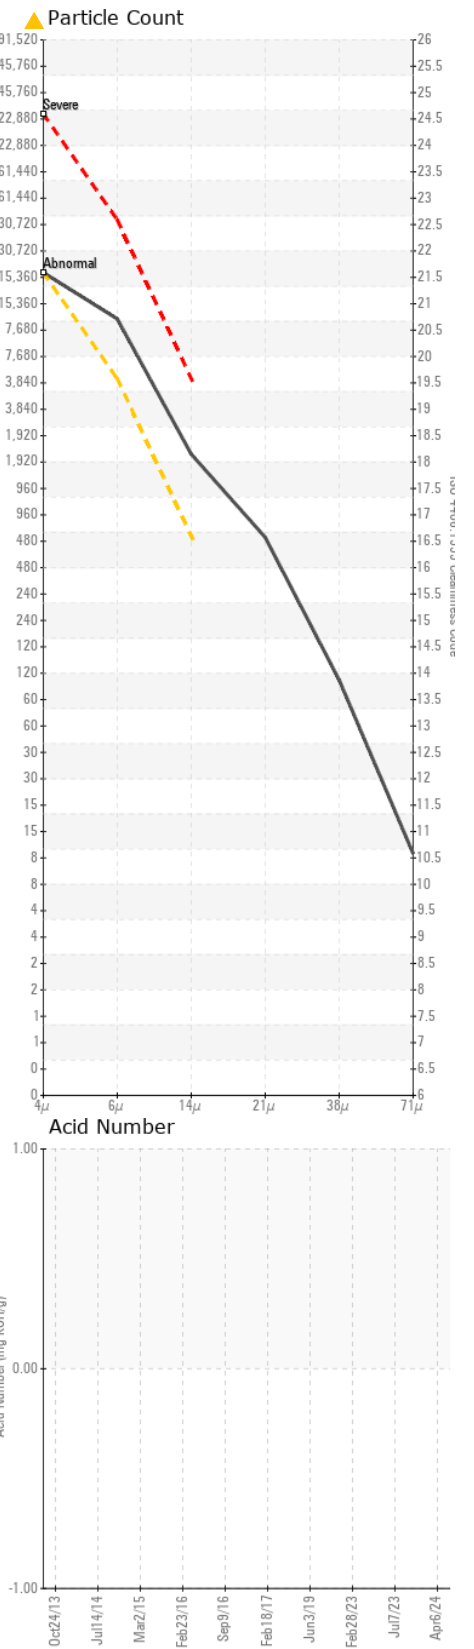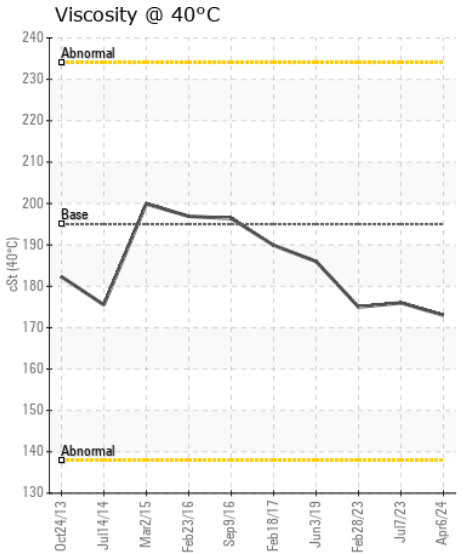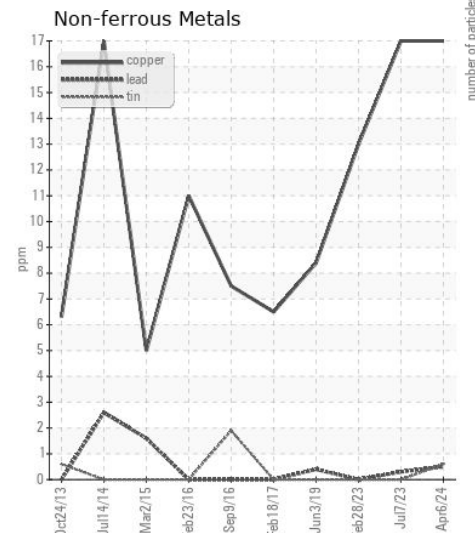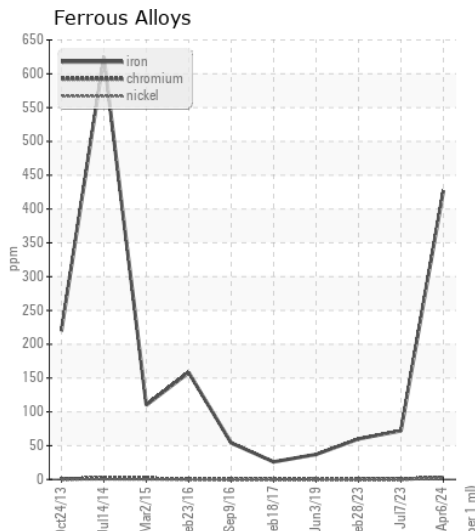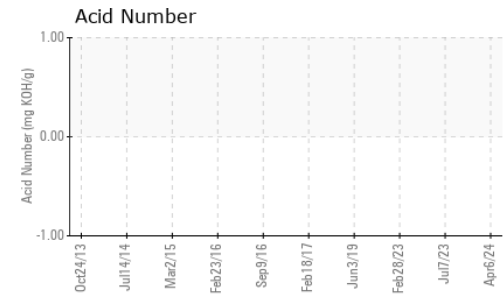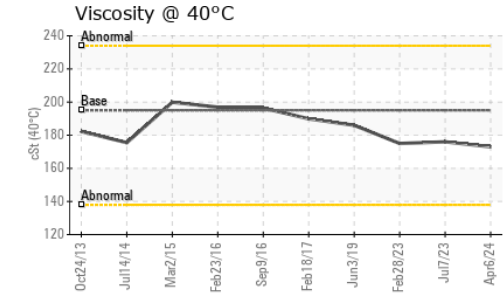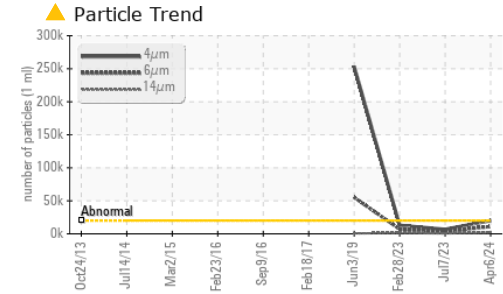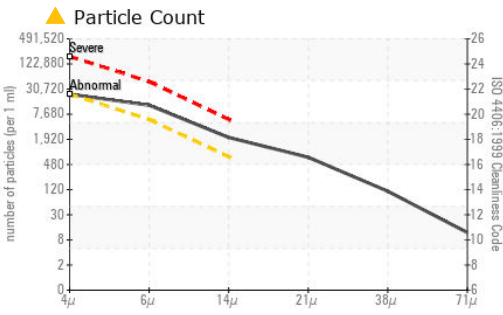

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0918646
Lab Number : 06156820
Unique Number : 10992243
Test Package : CONST (Additional Tests: PrtCount)

CAROLINA SUNROCK
 PO BOX 25
 BUTNER, NC
 US 27509
 Contact: Leigh Dennis
 rdennis@thesunrockgroup.com
 T: (919)575-4505
 F: (919)575-0162

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)