



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area  
**GM SEATTLE OFF ROAD SHOP**  
Machine Id  
**[GM SEATTLE OFF ROAD SHOP] 24-752**  
Component  
**Hydraulic System**  
Fluid  
**CAT HYDO (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PE0003403	---	---
Sample Date		Client Info		20 Mar 2024	---	---
Machine Age	hrs	Client Info		1010	---	---
Oil Age	hrs	Client Info		1010	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		None	---	---
Sample Status				NORMAL	---	---

## WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
Iron	ppm	ASTM D5185m	>20	11	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>10	3	---	---
Lead	ppm	ASTM D5185m	>10	<1	---	---
Copper	ppm	ASTM D5185m	>75	5	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

## CONTAMINATION










There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Silicon	ppm	ASTM D5185m	>20	2	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647	>5000	1468	---	---
Particles >6µm		ASTM D7647	>1300	93	---	---
Particles >14µm		ASTM D7647	>160	6	---	---
Particles >21µm		ASTM D7647	>40	2	---	---
Particles >38µm		ASTM D7647	>10	0	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	18/14/10	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

## FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		<1	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		2	---	---
Calcium	ppm	ASTM D5185m		108	---	---
Phosphorus	ppm	ASTM D5185m	1100	609	---	---
Zinc	ppm	ASTM D5185m	1210	712	---	---
Sulfur	ppm	ASTM D5185m		1721	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		0.69	---	---
Visc @ 40°C	cSt	ASTM D445	37.9	40.5	---	---

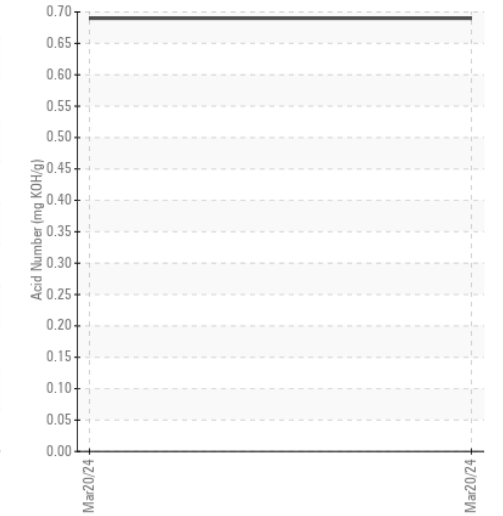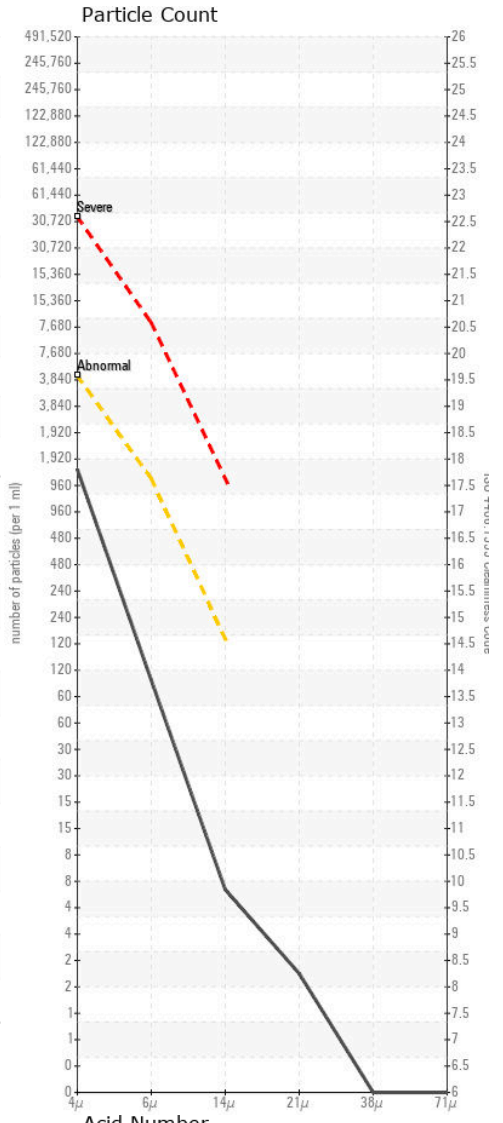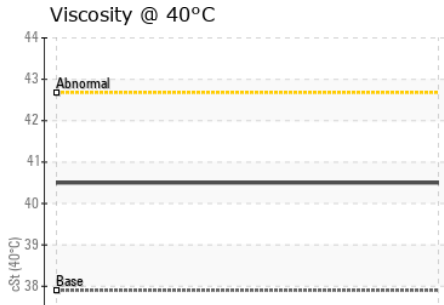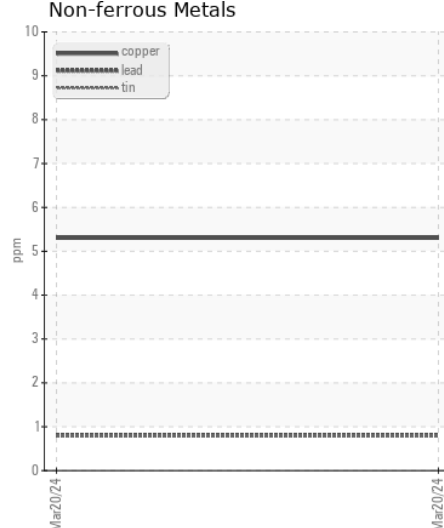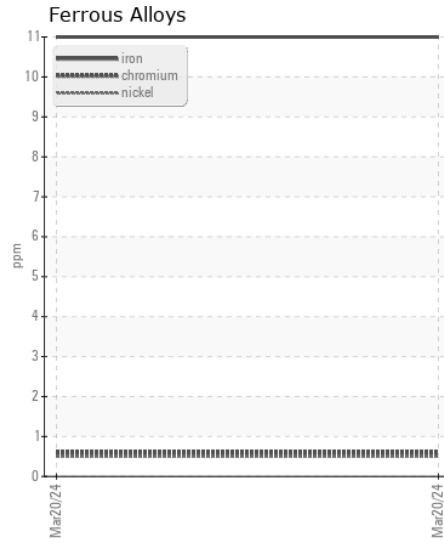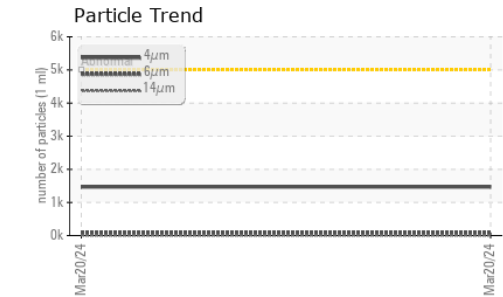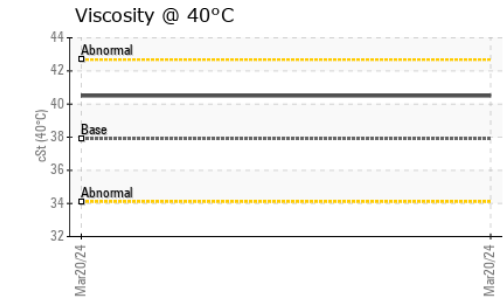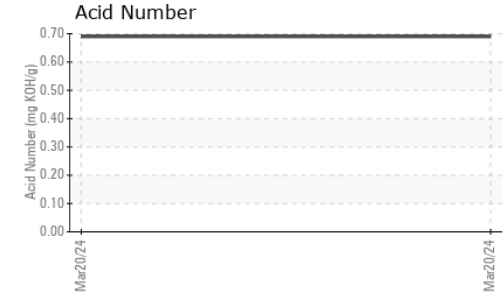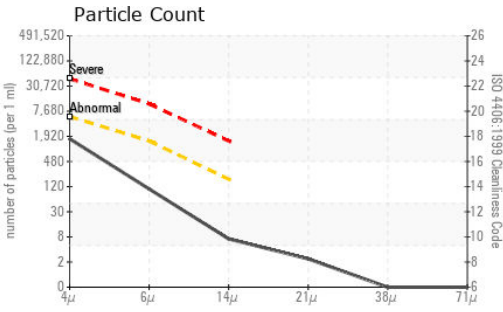

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PE0003403 **Received** : 22 Apr 2024  
**Lab Number** : 06156856 **Tested** : 23 Apr 2024  
**Unique Number** : 10992279 **Diagnosed** : 24 Apr 2024 - Angela Borella  
**Test Package** : CONST ( Additional Tests: ICP, KV40, PQ, PrtCount, SCREEN )  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**Gary Merlino Construction - Off Road Shop**  
 9125 10TH AVE SOUTH  
 SEATTLE, WA  
 US 98108  
 Contact: Jesse Patterson  
 jessep@gmccinc.com  
 T: (206)255-2601  
 F: