



# ASCENDUM

## OIL ANALYSIS REPORT

WEAR	<b>ABNORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**VOLVO L90H 625703**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 40 (--- GAL)**

### RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0010438	---	---
Sample Date		Client Info		02 Apr 2024	---	---
Machine Age	hrs	Client Info		6885	---	---
Oil Age	hrs	Client Info		6885	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ABNORMAL	---	---

### WEAR

The aluminum level is abnormal. All other component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	71	---	---
Chromium	ppm	ASTM D5185m	>10	3	---	---
Nickel	ppm	ASTM D5185m	>10	1	---	---
Titanium	ppm	ASTM D5185m		95	---	---
Silver	ppm	ASTM D5185m	>2	0	---	---
Aluminum	ppm	ASTM D5185m	>10	▲ 19	---	---
Lead	ppm	ASTM D5185m	>20	6	---	---
Copper	ppm	ASTM D5185m	>15	4	---	---
Tin	ppm	ASTM D5185m	>10	3	---	---
Vanadium	ppm	ASTM D5185m		1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

### CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	14	---	---
Potassium	ppm	ASTM D5185m	>20	6	---	---
Fuel		WC Method	>6.0	<1.0	---	---
Water		WC Method	>0.1	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	2.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	14.0	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	33.8	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

### FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>216	2	---	---
Boron	ppm	ASTM D5185m	250	16	---	---
Barium	ppm	ASTM D5185m	10	0	---	---
Molybdenum	ppm	ASTM D5185m	100	23	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m	450	446	---	---
Calcium	ppm	ASTM D5185m	3000	1886	---	---
Phosphorus	ppm	ASTM D5185m	1150	963	---	---
Zinc	ppm	ASTM D5185m	1350	1256	---	---
Sulfur	ppm	ASTM D5185m	4250	3686	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	26.4	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	5.6	---	---
Visc @ 100°C	cSt	ASTM D445	14.4	15.3	---	---


▲ Aluminum (ppm)

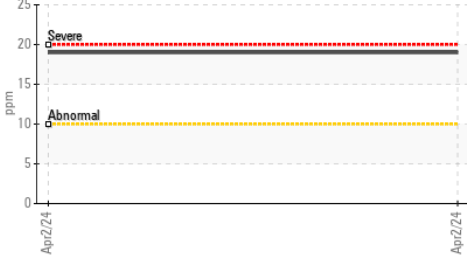


Ferrous Alloys

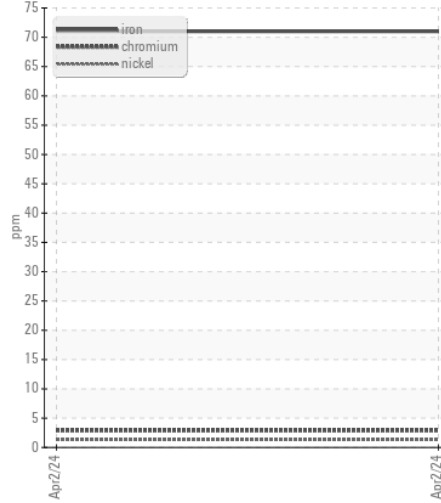


FT-IR (Direct Trend)

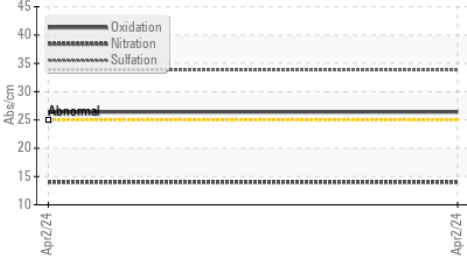

Non-ferrous Metals

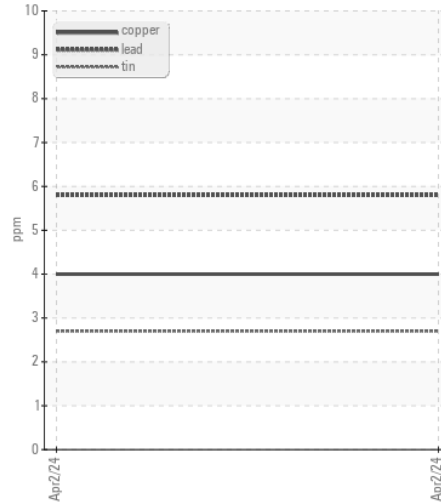


Base Number

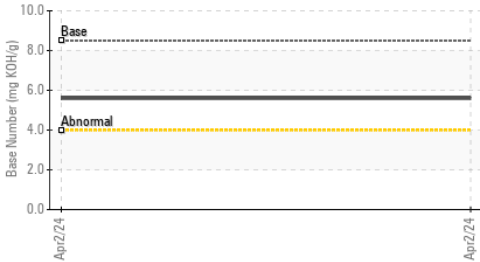


Viscosity @ 100°C



Viscosity @ 100°C

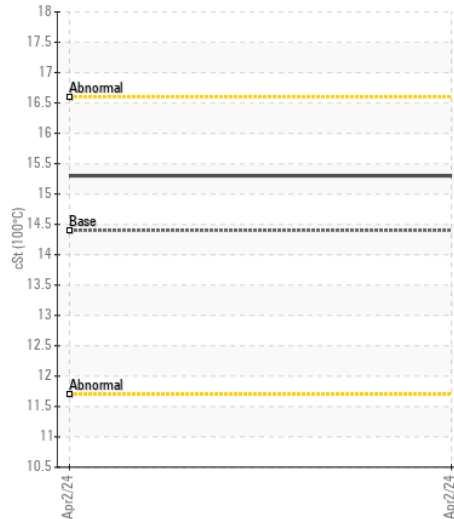

Base Number

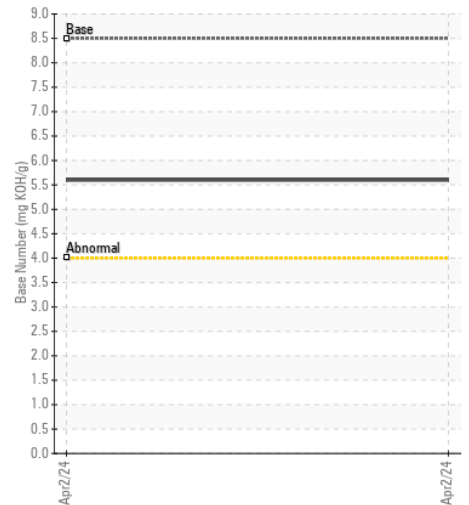

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : ASC0010438

Lab Number : 06157192

Unique Number : 10992615

Test Package : CONST ( Additional Tests: TBN )

Received : 23 Apr 2024

Tested : 24 Apr 2024

Diagnosed : 25 Apr 2024 - Jonathan Hester

113 - ASCENDUM MACHINERY INC - GARNER

3561 JONES SAUSAGE ROAD

GARNER, NC

US 27529

Contact: RYAN ZEBALLOS

ryan.zeballos@ascendummachinery.com

T:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (919)661-9038