



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
4811140
 Component
Diesel Engine
 Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		IL06157210	---	---
Sample Date		Client Info		22 Apr 2024	---	---
Machine Age	mls	Client Info		178120	---	---
Oil Age	mls	Client Info		0	---	---
Filter Age	mls	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	16	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>4	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	<1	---	---
Aluminum	ppm	ASTM D5185m	>20	4	---	---
Lead	ppm	ASTM D5185m	>40	2	---	---
Copper	ppm	ASTM D5185m	>330	2	---	---
Tin	ppm	ASTM D5185m	>15	1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	7	---	---
Potassium	ppm	ASTM D5185m	>20	6	---	---
Fuel	%	ASTM D3524	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	1.5	---	---
Nitration	Abs/cm	*ASTM D7624	>20	10.4	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.0	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<1	---	---
Boron	ppm	ASTM D5185m		33	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		46	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		473	---	---
Calcium	ppm	ASTM D5185m		1647	---	---
Phosphorus	ppm	ASTM D5185m		704	---	---
Zinc	ppm	ASTM D5185m		899	---	---
Sulfur	ppm	ASTM D5185m		2536	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	21.5	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		11.2	---	---
Visc @ 100°C	cSt	ASTM D445		11.8	---	---

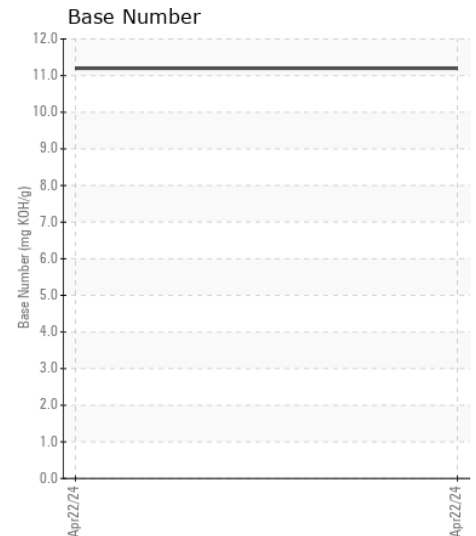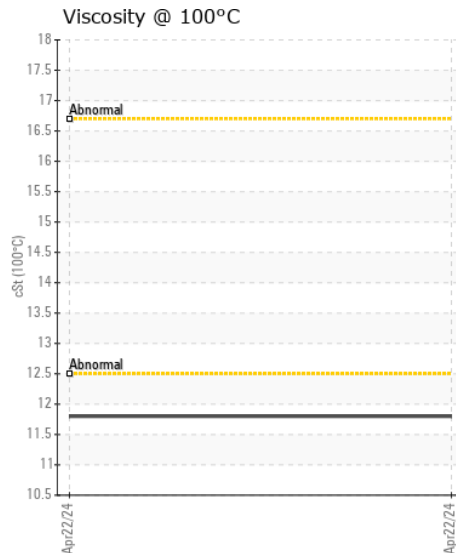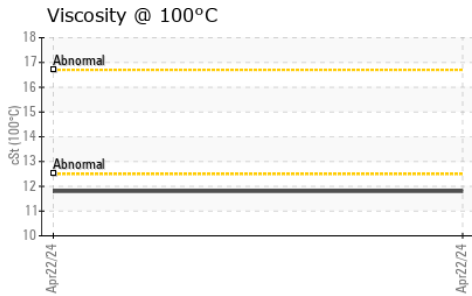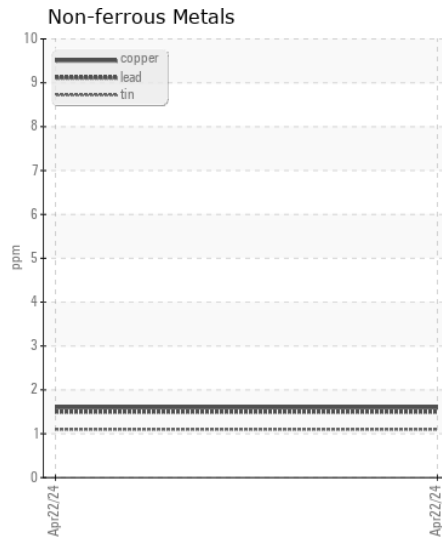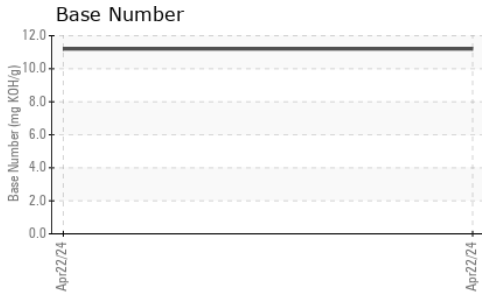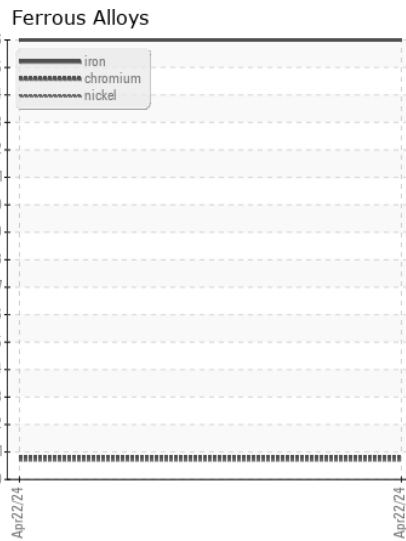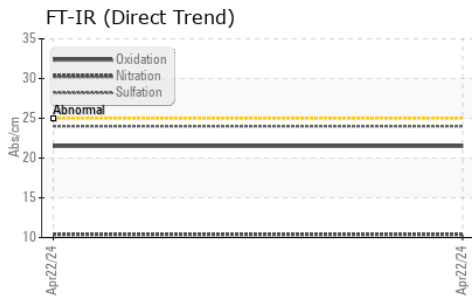

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : IL06157210

Lab Number : 06157210

Unique Number : 10992633

Test Package : FLEET (Additional Tests: FuelDilution)

Received : 23 Apr 2024

Tested : 24 Apr 2024

Diagnosed : 25 Apr 2024 - Jonathan Hester

IDEALEASE OF ATLANTA - FULTON

4675 BAKERS FERRY ROAD

ATLANTA, GA

US 30331

Contact: DAVID JOHNS

davidjohns@idealease.com

T: (404)699-5571

F: (404)699-7420

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)