



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	SEVERE
FLUID CONDITION	ABNORMAL

Area
[SWA540568 MULCH CTR]

Machine Id
VOLVO L90D 64482

Component
Diesel Engine

Fluid
MOBIL DELVAC 1300 SUPER15W40 (--- GAL)



RECOMMENDATION

We advise that you check the fuel injection system. We recommend that you drain the oil and perform a filter service on this component if not already done. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP339970	VCP339956	---
Sample Date		Client Info		19 Apr 2024	30 Oct 2023	---
Machine Age	hrs	Client Info		26764	26602	---
Oil Age	hrs	Client Info		142	2	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		Not Changd	Changed	---
Sample Status				SEVERE	ABNORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	13	16	---
Chromium	ppm	ASTM D5185m	>20	<1	<1	---
Nickel	ppm	ASTM D5185m	>5	0	1	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m	>2	0	<1	---
Aluminum	ppm	ASTM D5185m	>30	2	2	---
Lead	ppm	ASTM D5185m	>40	2	5	---
Copper	ppm	ASTM D5185m	>20	3	14	---
Tin	ppm	ASTM D5185m	>20	5	4	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION













There is a high amount of fuel present in the oil.

Silicon	ppm	ASTM D5185m	>20	25	▲ 137	---
Potassium	ppm	ASTM D5185m	>20	8	5	---
Fuel	%	ASTM D3524	>6.0	▲ 30.3	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.2	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	7.9	7.7	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.5	21.2	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

Sodium	ppm	ASTM D5185m		5	2	---
Boron	ppm	ASTM D5185m	0	55	79	---
Barium	ppm	ASTM D5185m	0	0	0	---
Molybdenum	ppm	ASTM D5185m	0	42	47	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m	0	369	634	---
Calcium	ppm	ASTM D5185m		1189	1542	---
Phosphorus	ppm	ASTM D5185m		578	748	---
Zinc	ppm	ASTM D5185m		655	964	---
Sulfur	ppm	ASTM D5185m		2273	2943	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.7	18.3	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	7.6	9.2	---
Visc @ 100°C	cSt	ASTM D445	14	▲ 6.8	13.6	---

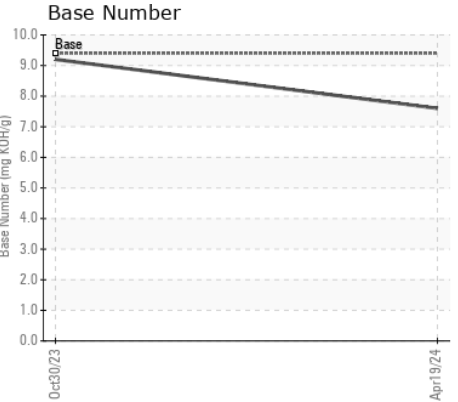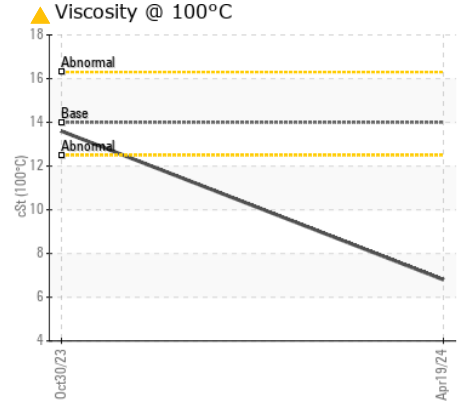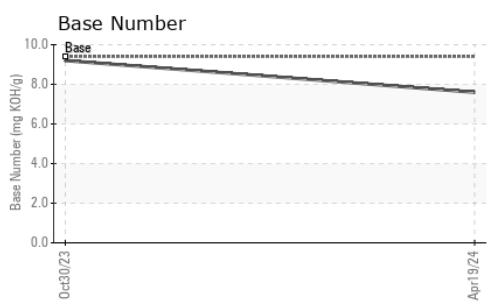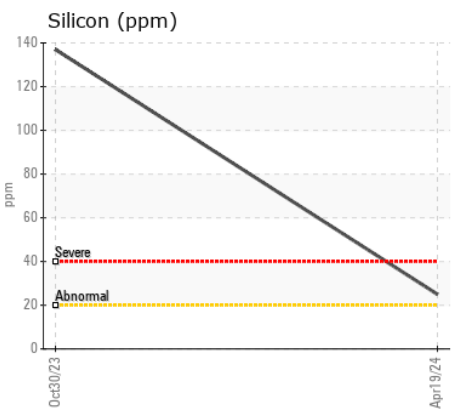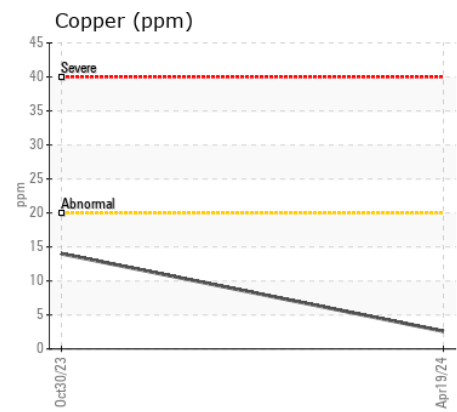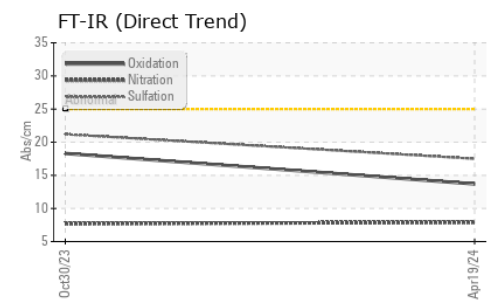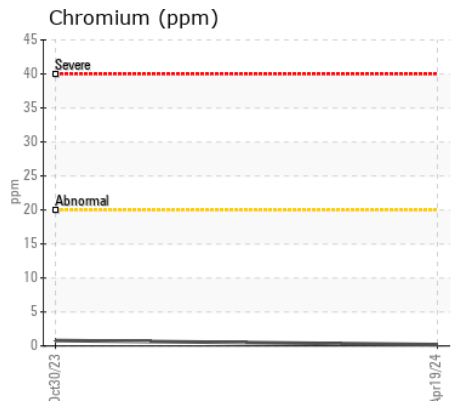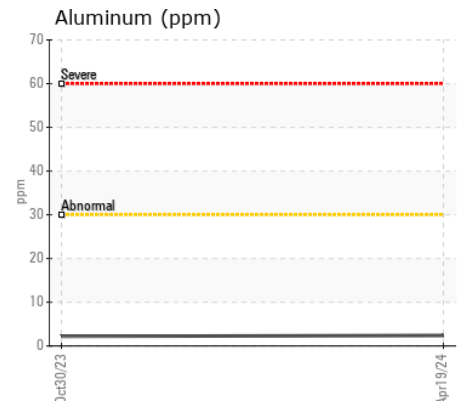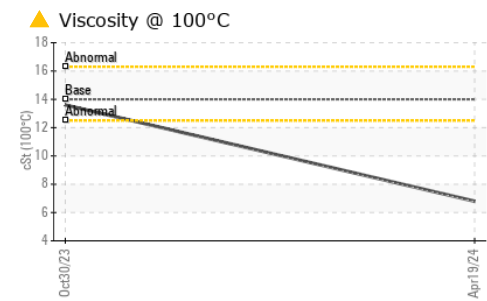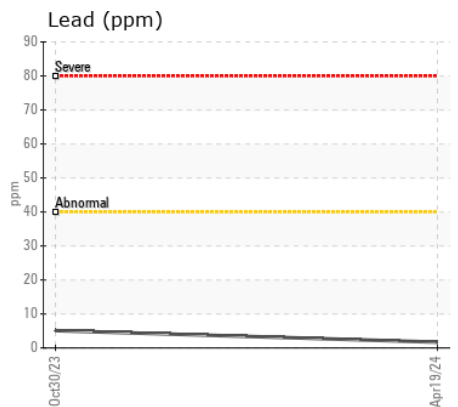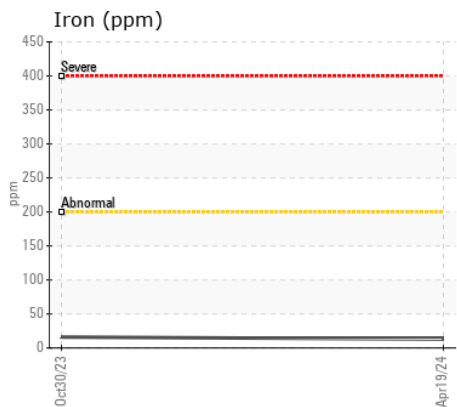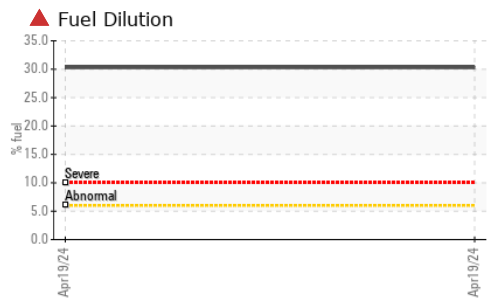

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP339970 **Received** : 23 Apr 2024
Lab Number : 06157342 **Tested** : 25 Apr 2024
Unique Number : 10992765 **Diagnosed** : 25 Apr 2024 - Jonathan Hester
Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel, TBN)

ALTA EQUIPMENT
 420 NOLEN DRIVE
 SOUTH ELGIN, IL
 US 60177
 Contact: CHRIS WILSON
 chris.wilson@altg.com
 T: (815)441-4623
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)