



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area

[25375]

Machine Id

VOLVO DD25B 660013

Component

Diesel Engine

Fluid

VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP455260	VCP215724	---
Sample Date		Client Info		18 Apr 2024	26 Dec 2017	---
Machine Age	hrs	Client Info		3710	1061	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	N/A	---
Filter Changed		Client Info		Changed	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	20	20	---
Chromium	ppm	ASTM D5185m	>10	<1	<1	---
Nickel	ppm	ASTM D5185m	>10	0	<1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>10	4	4	---
Lead	ppm	ASTM D5185m	>20	0	<1	---
Copper	ppm	ASTM D5185m	>15	0	<1	---
Tin	ppm	ASTM D5185m	>10	<1	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	9	7	---
Potassium	ppm	ASTM D5185m	>20	0	4	---
Fuel		WC Method	>6.0	<1.0	<1.0	---
Water		WC Method	>0.1	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.5	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	10.1	7.	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.1	19.	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	7	---
Boron	ppm	ASTM D5185m	2.5	98	235	---
Barium	ppm	ASTM D5185m	0.0	0	0	---
Molybdenum	ppm	ASTM D5185m	0.7	52	88	---
Manganese	ppm	ASTM D5185m	0.0	<1	<1	---
Magnesium	ppm	ASTM D5185m	256	542	551	---
Calcium	ppm	ASTM D5185m	2057	1814	1361	---
Phosphorus	ppm	ASTM D5185m	935	1014	675	---
Zinc	ppm	ASTM D5185m	1223	1214	792	---
Sulfur	ppm	ASTM D5185m	4079	3417	2082	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	22.4	16.	---
Base Number (BN)	mg KOH/g	ASTM D2896	10	9.5	---	---
Visc @ 100°C	cSt	ASTM D445	15.0	13.2	14.14	---

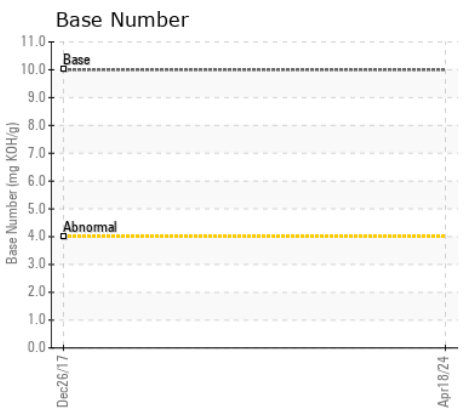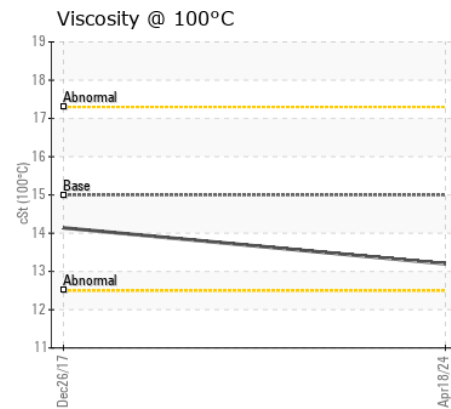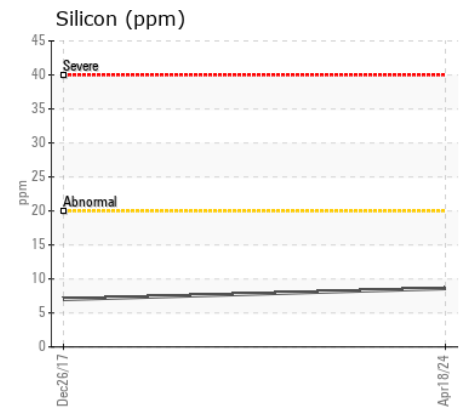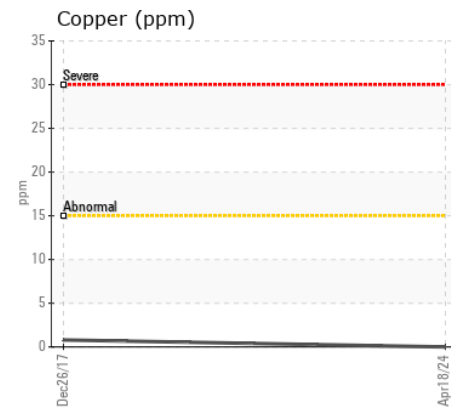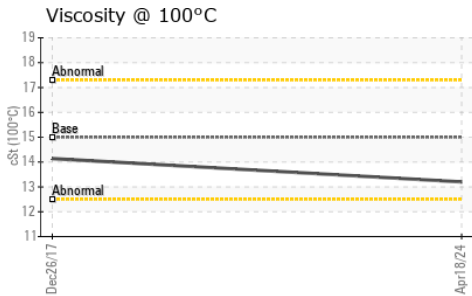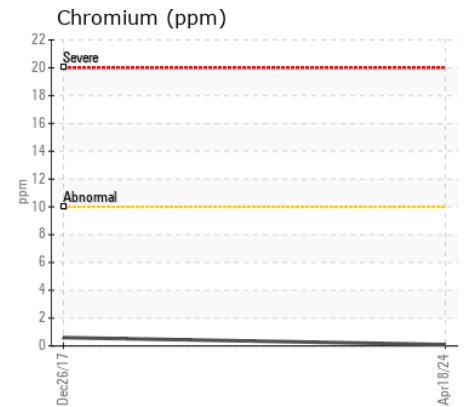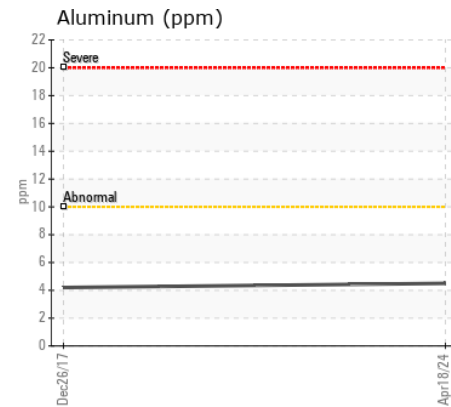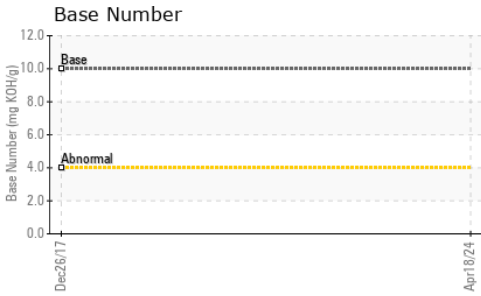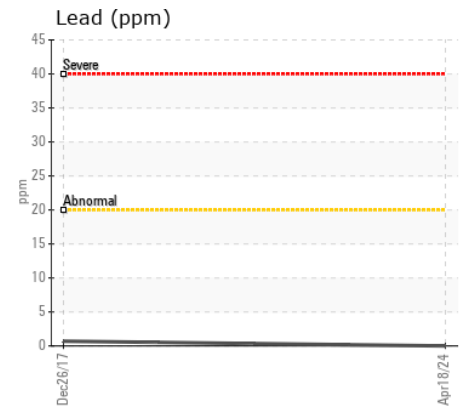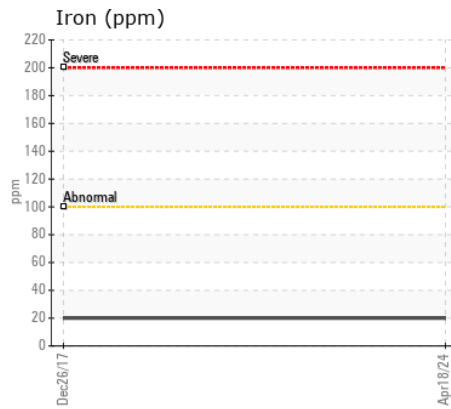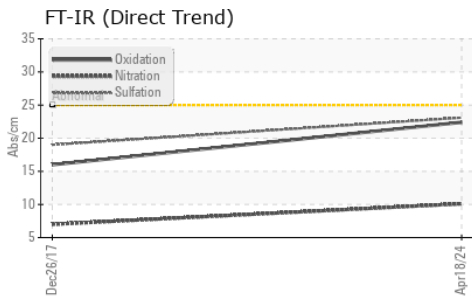

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP455260
Lab Number : 06157345
Unique Number : 10992768
Test Package : MOB 1 (Additional Tests: TBN)

Received : 23 Apr 2024
Tested : 24 Apr 2024
Diagnosed : 24 Apr 2024 - Wes Davis

218 - ASCENDUM MACHINERY INC - N. CHARLESTON
 7235 CROSS COUNTRY RD.
 NORTH CHARLESTON, SC
 US 29418

Contact: MATT MITCHAM
 matt.mitcham@ascendummachinery.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (843)414-1129