



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**PETERSON 6710D 32D-29-2116**

Component  
**Diesel Engine**

Fluid  
**VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP446514</b>	VCP441426	VCP363300
Sample Date		Client Info		<b>19 Apr 2024</b>	11 Jan 2024	06 Sep 2023
Machine Age	hrs	Client Info		<b>2697</b>	2241	1856
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>43</b>	29	56
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	2	2
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>6</b>	4	4
Lead	ppm	ASTM D5185m	>40	<b>2</b>	2	3
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	6	10
Tin	ppm	ASTM D5185m	>15	<b>1</b>	1	2
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>13</b>	23	8
Potassium	ppm	ASTM D5185m	>20	<b>10</b>	5	5
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.2	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.4</b>	10.1	10.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>23.3</b>	22.9	22.2
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>2</b>	<1	3
Boron	ppm	ASTM D5185m	2.5	<b>29</b>	11	7
Barium	ppm	ASTM D5185m	0.0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0.7	<b>48</b>	50	59
Manganese	ppm	ASTM D5185m	0.0	<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m	256	<b>532</b>	528	594
Calcium	ppm	ASTM D5185m	2057	<b>1736</b>	1634	1946
Phosphorus	ppm	ASTM D5185m	935	<b>996</b>	942	1076
Zinc	ppm	ASTM D5185m	1223	<b>1172</b>	1184	1374
Sulfur	ppm	ASTM D5185m	4079	<b>3274</b>	2866	3862
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>22.8</b>	22.5	19.4
Base Number (BN)	mg KOH/g	ASTM D2896	10	<b>8.9</b>	8.6	7.8
Visc @ 100°C	cSt	ASTM D445	15.0	<b>12.8</b>	12.8	12.9

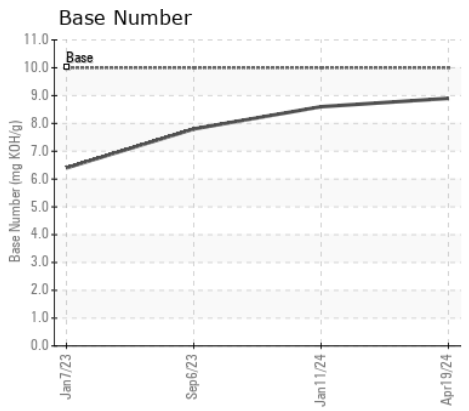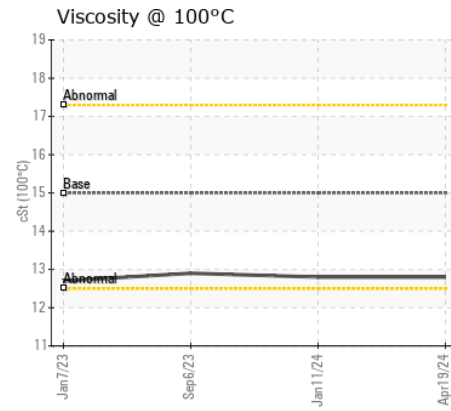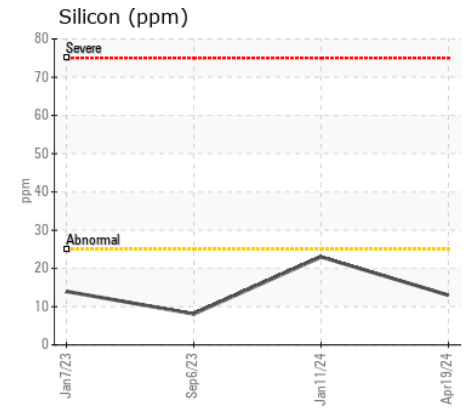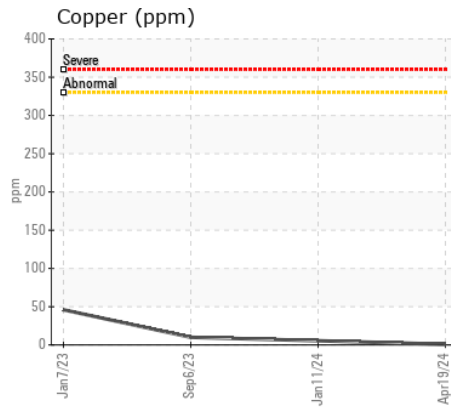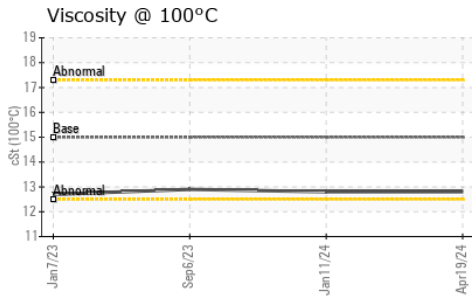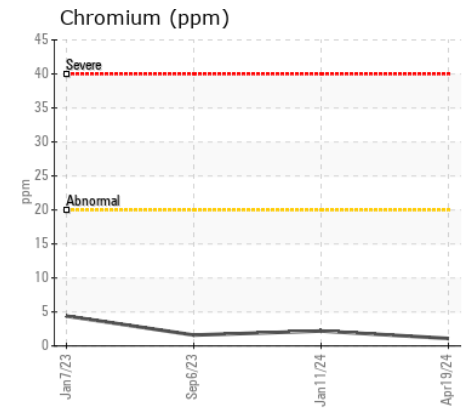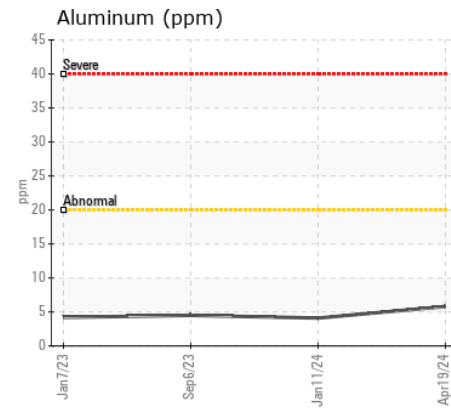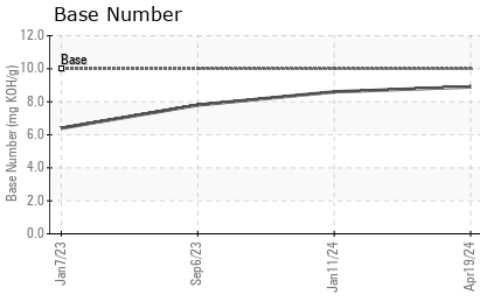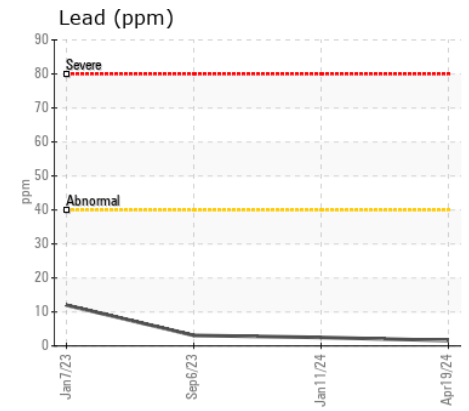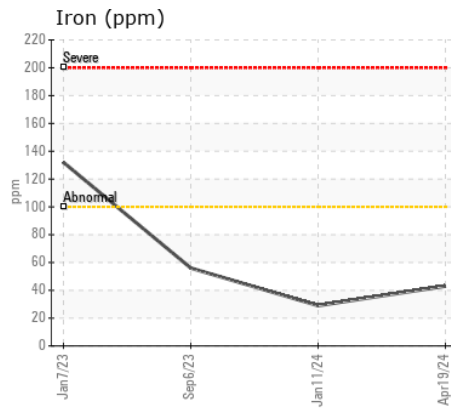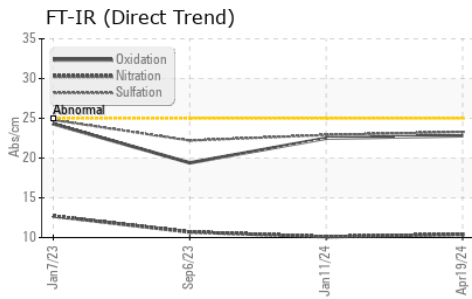

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP446514 **Received** : 23 Apr 2024  
**Lab Number** : 06157354 **Tested** : 24 Apr 2024  
**Unique Number** : 10992777 **Diagnosed** : 24 Apr 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**ALTA EQUIPMENT COMPANY**  
 5151 DR MARTIN LUTHER KING BLVD  
 FORT MYERS, FL  
 US 33905

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: TODD LARK  
 tlark@altaequipfl.com

T:  
 F: (239)481-3302