



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
8916866
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 10W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		IL0031042	IL05811289	IL05433416
Sample Date		Client Info		16 Apr 2024	23 Mar 2023	23 Dec 2021
Machine Age	mls	Client Info		202700	181650	141170
Oil Age	mls	Client Info		0	40000	30000
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ATTENTION	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	58	66	40
Chromium	ppm	ASTM D5185m	>20	3	6	4
Nickel	ppm	ASTM D5185m	>4	0	<1	0
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	4	6	4
Lead	ppm	ASTM D5185m	>40	<1	3	2
Copper	ppm	ASTM D5185m	>330	4	11	6
Tin	ppm	ASTM D5185m	>15	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	14	22	17
Potassium	ppm	ASTM D5185m	>20	2	6	2
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	1.2	1	0.9
Nitration	Abs/cm	*ASTM D7624	>20	12.7	11.3	11
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.9	26.1	24.9
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		5	4	3
Boron	ppm	ASTM D5185m	250	28	48	29
Barium	ppm	ASTM D5185m	10	0	0	1
Molybdenum	ppm	ASTM D5185m	100	52	70	27
Manganese	ppm	ASTM D5185m		<1	1	<1
Magnesium	ppm	ASTM D5185m	450	552	674	506
Calcium	ppm	ASTM D5185m	3000	1836	1374	1508
Phosphorus	ppm	ASTM D5185m	1150	799	946	647
Zinc	ppm	ASTM D5185m	1350	939	1215	818
Sulfur	ppm	ASTM D5185m	4250	2640	3040	2237
Oxidation	Abs/.1mm	*ASTM D7414	>25	26.7	22.5	20.9
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	6.2	7.3	6.5
Visc @ 100°C	cSt	ASTM D445	10.9	11.8	13.7	12.3


FT-IR (Direct Trend)

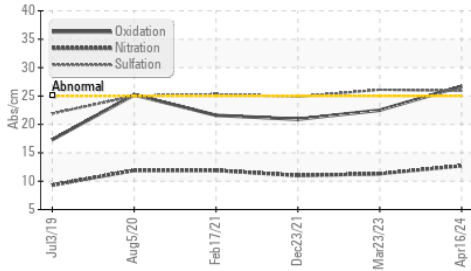


Ferrous Alloys

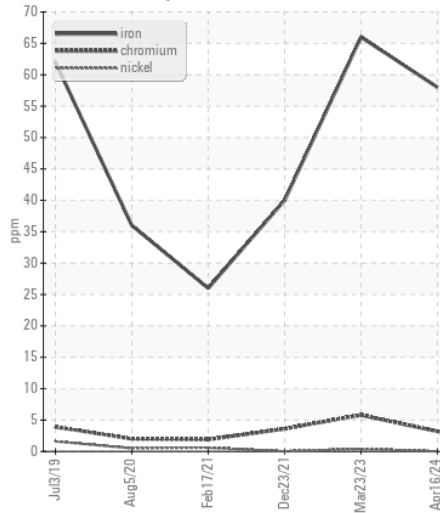


Base Number

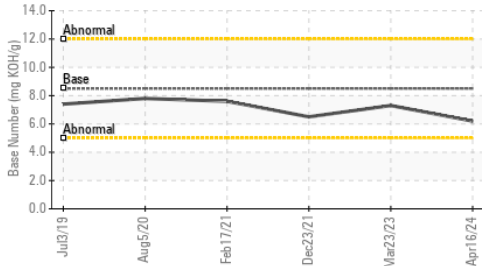


Non-ferrous Metals

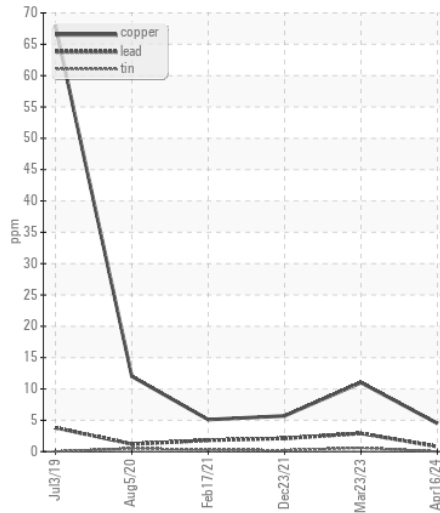


Viscosity @ 100°C

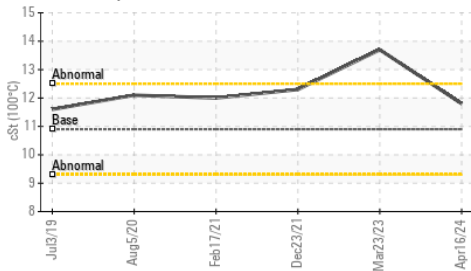

Viscosity @ 100°C

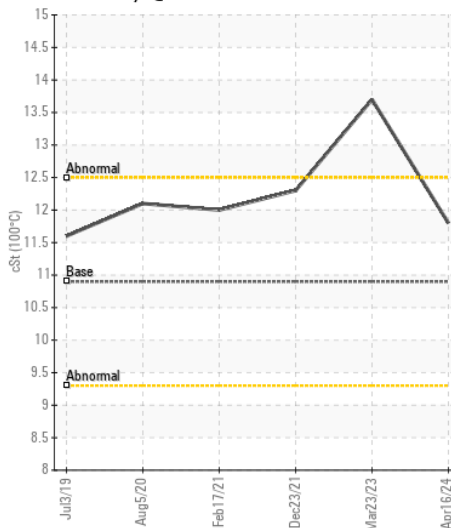

Base Number

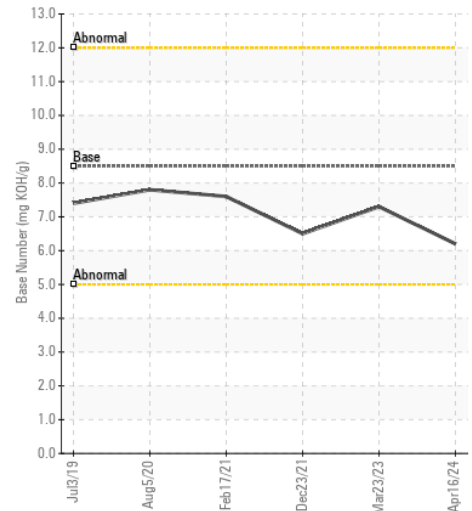

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : IL0031042

Lab Number : 06157376

Unique Number : 10992799

Test Package : FLEET

Received : 23 Apr 2024

Tested : 24 Apr 2024

Diagnosed : 25 Apr 2024 - Jonathan Hester

IDEALRELEASE OF ATLANTA - FULTON

4675 BAKERS FERRY ROAD

ATLANTA, GA

US 30331

Contact: DAVID JOHNS

davidjohns@idealease.com

T: (404)699-5571

F: (404)699-7420

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)