



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
814BL
 Component
Diesel Engine
 Fluid
MOBIL 1 SAE 10W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		IL0031034	IL0034842	IL06009314
Sample Date		Client Info		15 Apr 2024	06 Feb 2024	17 Oct 2023
Machine Age	mls	Client Info		81429	78939	74793
Oil Age	mls	Client Info		0	8000	15000
Filter Age	mls	Client Info		0	8000	0
Oil Changed		Client Info		N/A	Changed	N/A
Filter Changed		Client Info		N/A	Changed	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	2	19	7
Chromium	ppm	ASTM D5185m	>20	0	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	2	4	3
Lead	ppm	ASTM D5185m	>40	0	2	1
Copper	ppm	ASTM D5185m	>330	<1	2	1
Tin	ppm	ASTM D5185m	>15	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	0	8	5
Potassium	ppm	ASTM D5185m	>20	0	0	<1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.5	1.2	0.7
Nitration	Abs/cm	*ASTM D7624	>20	7.5	12.4	9.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.0	23.1	22.4
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	3	3
Boron	ppm	ASTM D5185m		60	28	37
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		42	47	40
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		507	521	488
Calcium	ppm	ASTM D5185m		1706	1796	1612
Phosphorus	ppm	ASTM D5185m		775	777	740
Zinc	ppm	ASTM D5185m		858	985	899
Sulfur	ppm	ASTM D5185m		2777	2592	2467
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.0	22.6	20.7
Base Number (BN)	mg KOH/g	ASTM D2896		10.5	10.0	10.2
Visc @ 100°C	cSt	ASTM D445	10	11.1	11.7	11.3


FT-IR (Direct Trend)

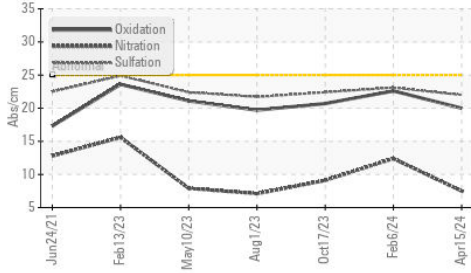


Ferrous Alloys

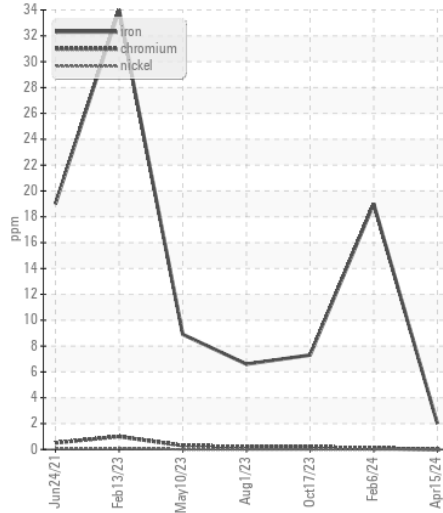


Base Number

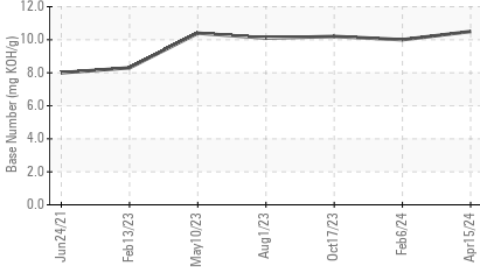


Non-ferrous Metals

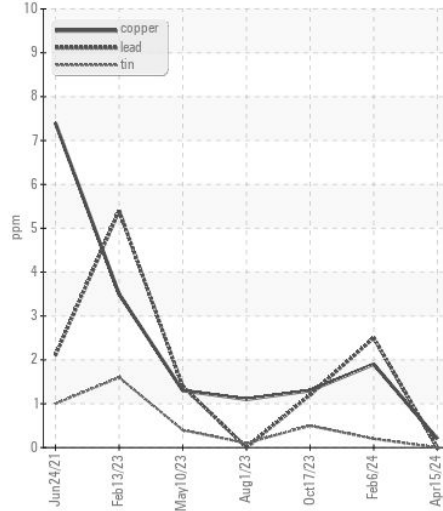


Viscosity @ 100°C

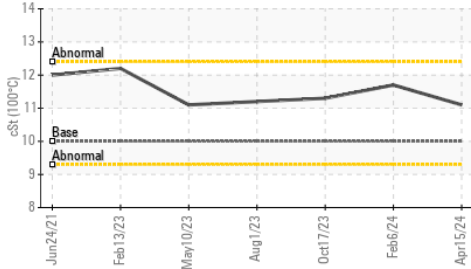

Viscosity @ 100°C

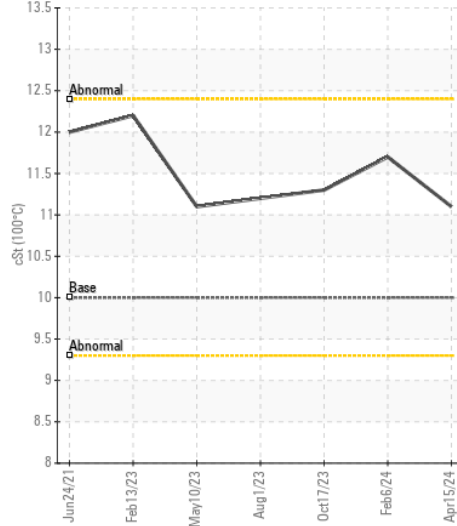

Base Number

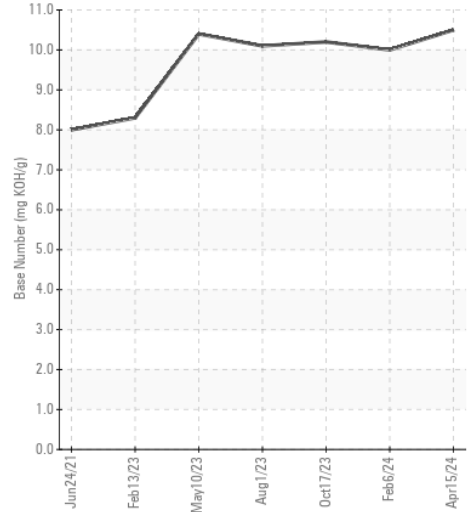

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : IL0031034
Lab Number : 06157381
Unique Number : 10992804
Test Package : FLEET

Received : 23 Apr 2024
Tested : 24 Apr 2024
Diagnosed : 24 Apr 2024 - Wes Davis

IDEALEASE OF ATLANTA - FULTON
 4675 BAKERS FERRY ROAD
 ATLANTA, GA
 US 30331

Contact: DAVID JOHNS
 davidjohns@idealease.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (404)699-5571
 F: (404)699-7420