



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO A45G 353436
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 40. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0002548	VCP423892	VCP439575
Sample Date		Client Info		04 Apr 2024	07 Dec 2023	11 Oct 2023
Machine Age	hrs	Client Info		5197	4136	3509
Oil Age	hrs	Client Info		1061	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Changed	Changed
Filter Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	4	11	4
Chromium	ppm	ASTM D5185m	>20	<1	0	0
Nickel	ppm	ASTM D5185m	>2	4	4	1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>25	6	2	2
Lead	ppm	ASTM D5185m	>40	0	<1	0
Copper	ppm	ASTM D5185m	>330	8	1	<1
Tin	ppm	ASTM D5185m	>15	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	0	4	4
Potassium	ppm	ASTM D5185m	>20	0	0	<1
Fuel		WC Method	>6.0	<1.0	<1.0	0.6
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.5	0.5	0.3
Nitration	Abs/cm	*ASTM D7624	>20	7.9	8.2	5.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.5	18.4	21.0
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>216	2	1	1
Boron	ppm	ASTM D5185m	250	2	5	36
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	59	56	41
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	450	932	1003	584
Calcium	ppm	ASTM D5185m	3000	1064	1251	1569
Phosphorus	ppm	ASTM D5185m	1150	1002	1130	980
Zinc	ppm	ASTM D5185m	1350	1150	1269	1164
Sulfur	ppm	ASTM D5185m	4250	3332	3387	2940
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.9	14.5	18.1
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	7.5	7.9	9.7
Visc @ 100°C	cSt	ASTM D445	14.4	12.6	12.3	12.2

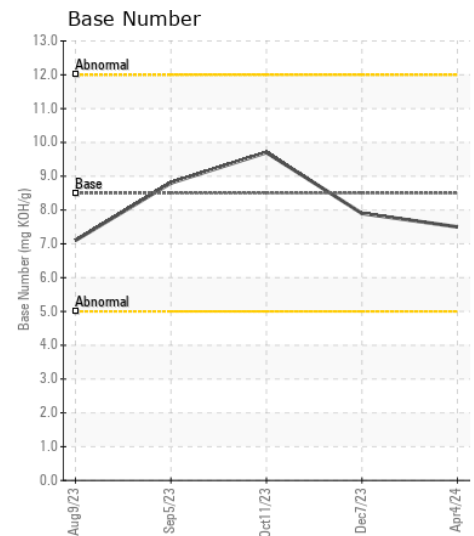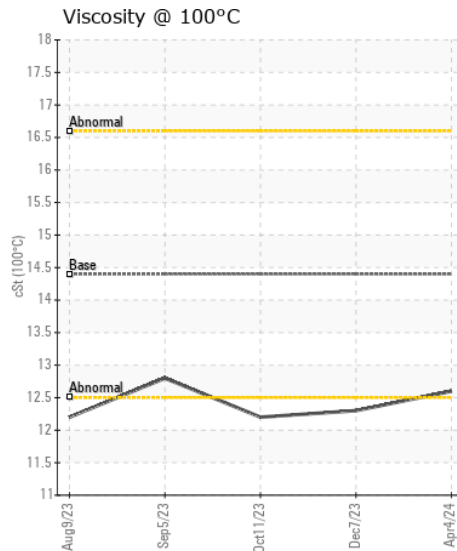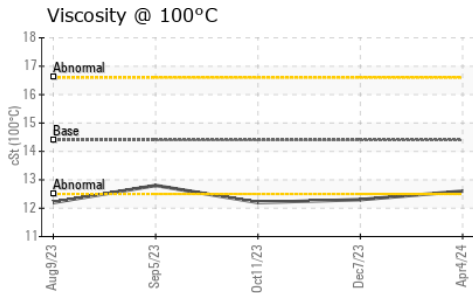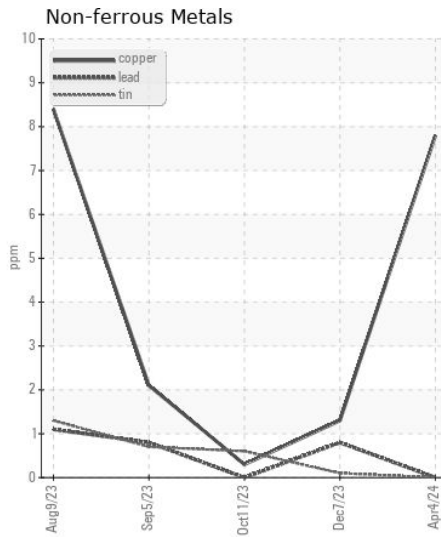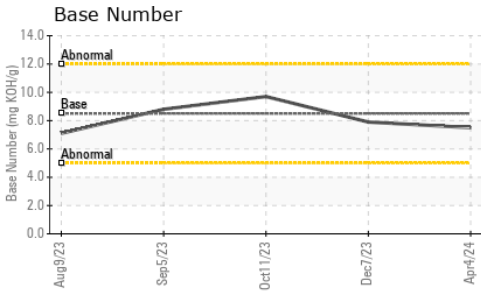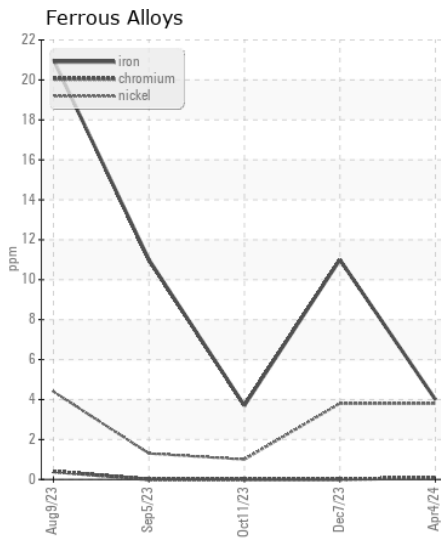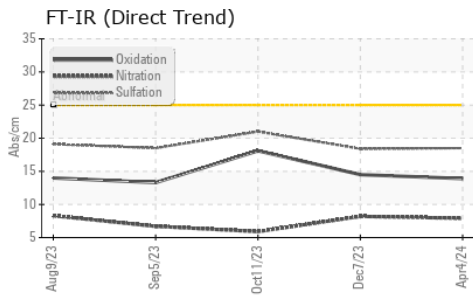

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : ASC0002548

Lab Number : 06157395

Unique Number : 10992818

Test Package : CONST (Additional Tests: TBN)

Received : 23 Apr 2024

Tested : 24 Apr 2024

Diagnosed : 24 Apr 2024 - Wes Davis

117 - ASCENDUM MACHINERY INC - GREENVILLE

2002 N GREENE ST

GREENVILLE, NC

US 27834

Contact: ALLEN WILLIAMS

allen.williams@ascendummachinery.com

T:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (704)494-8197