



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO A40G 341237
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0010031	VCP411919	VCP389534
Sample Date		Client Info		18 Apr 2024	27 Jul 2023	20 Oct 2022
Machine Age	hrs	Client Info		8907	7468	6097
Oil Age	hrs	Client Info		500	0	0
Filter Age	hrs	Client Info		500	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	7	42	10
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>2	0	2	0
Titanium	ppm	ASTM D5185m		12	1	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>25	8	24	4
Lead	ppm	ASTM D5185m	>40	2	12	<1
Copper	ppm	ASTM D5185m	>330	<1	6	<1
Tin	ppm	ASTM D5185m	>15	0	2	<1
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION









Fuel content negligible. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	3	39	7
Potassium	ppm	ASTM D5185m	>20	0	1	2
Fuel	%	ASTM D3524	>6.0	0.5	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.5	0.4
Nitration	Abs/cm	*ASTM D7624	>20	9.9	9.7	8.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.6	21.7	24.1
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	2	3	<1
Boron	ppm	ASTM D5185m	250	18	9	36
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	47	59	43
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	450	773	915	476
Calcium	ppm	ASTM D5185m	3000	1177	1262	1763
Phosphorus	ppm	ASTM D5185m	1150	951	1006	911
Zinc	ppm	ASTM D5185m	1350	1121	1242	1108
Sulfur	ppm	ASTM D5185m	4250	3339	3423	3453
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.6	18.4	21.5
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	5.7	7.0	11.3
Visc @ 100°C	cSt	ASTM D445	14.4	12.1	12.8	13.0

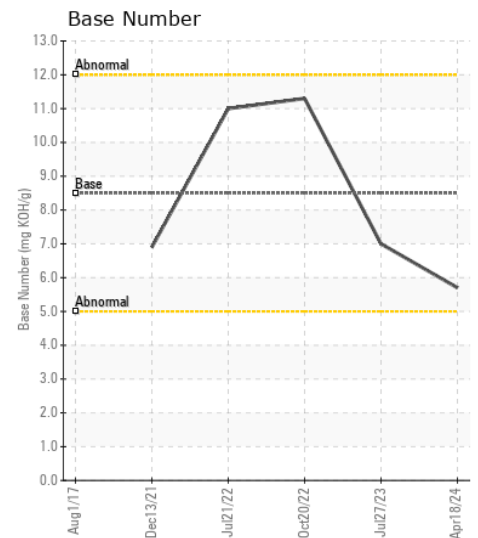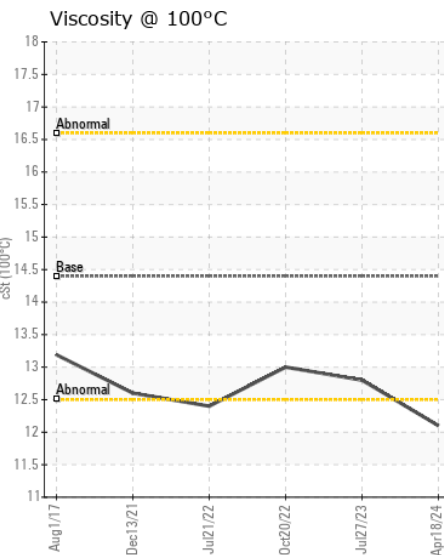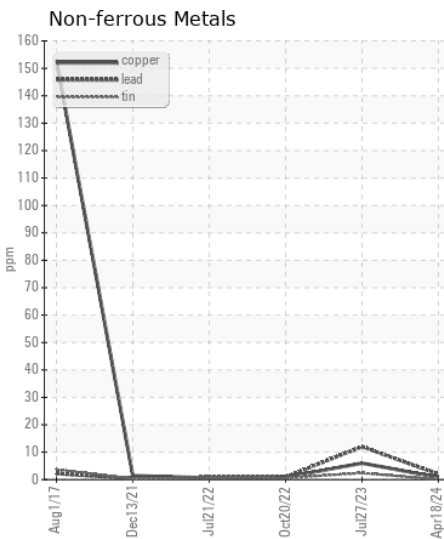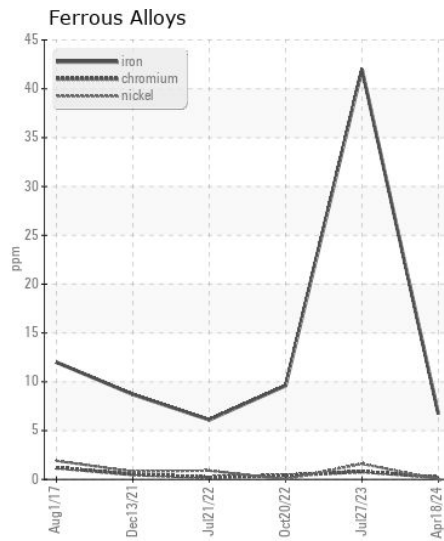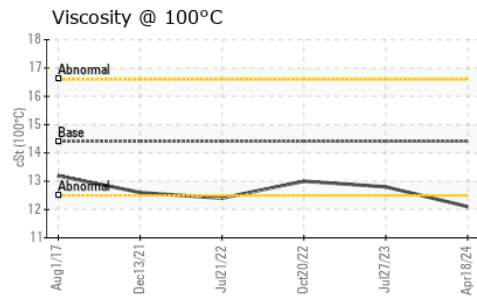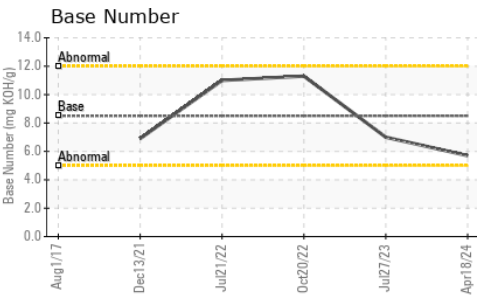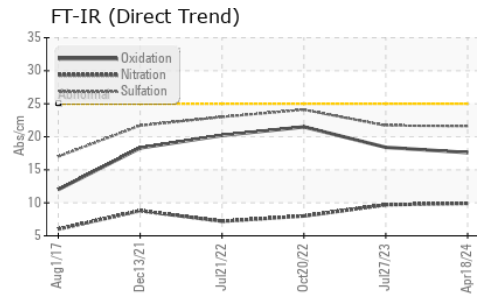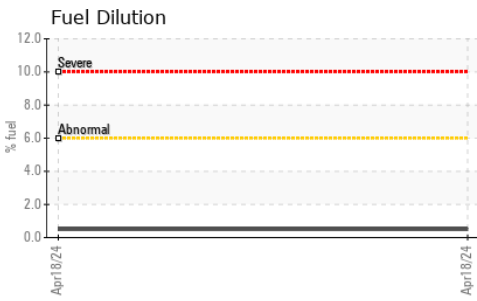

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0010031
Lab Number : 06157410
Unique Number : 10992833
Test Package : CONST (Additional Tests: FuelDilution, PercentFuel, TBN)

Received : 23 Apr 2024
Tested : 25 Apr 2024
Diagnosed : 25 Apr 2024 - Wes Davis

HANSON SOUTHEAST
 NC HWY 117
 ERWIN, NC
 US 28339
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: