



WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	ABNORMAL

Machine Id
MORBARK 6600 TG-5 (S/N 186-1132)
 Component
Diesel Engine
 Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)

RECOMMENDATION

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0196224	JR0196442	JR0173376
Sample Date		Client Info		18 Apr 2024	13 Mar 2024	27 Oct 2023
Machine Age	hrs	Client Info		10197	10086	9744
Oil Age	hrs	Client Info		111	342	229
Filter Age	hrs	Client Info		111	342	229
Oil Changed		Client Info		Not Changd	Changed	Changed
Filter Changed		Client Info		Not Changd	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	6	29	19
Chromium	ppm	ASTM D5185m	>20	<1	<1	3
Nickel	ppm	ASTM D5185m	>4	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	1	1	3
Lead	ppm	ASTM D5185m	>40	0	2	0
Copper	ppm	ASTM D5185m	>330	11	33	29
Tin	ppm	ASTM D5185m	>15	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION









There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Silicon	ppm	ASTM D5185m	>25	<1	6	8
Potassium	ppm	ASTM D5185m	>20	0	0	<1
Fuel	%	ASTM D3524	>5	▲ 6.5	▲ 6.6	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	7.3	8.5	7.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.7	20.0	19.9
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

Sodium	ppm	ASTM D5185m		2	0	2
Boron	ppm	ASTM D5185m		216	169	208
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		196	208	231
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m		636	715	801
Calcium	ppm	ASTM D5185m		1138	1197	1243
Phosphorus	ppm	ASTM D5185m		746	800	864
Zinc	ppm	ASTM D5185m		813	912	1077
Sulfur	ppm	ASTM D5185m		2644	2898	2875
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.3	15.3	14.5
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	8.6	7.8	8.0
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 11.6	▲ 10.8	12.8

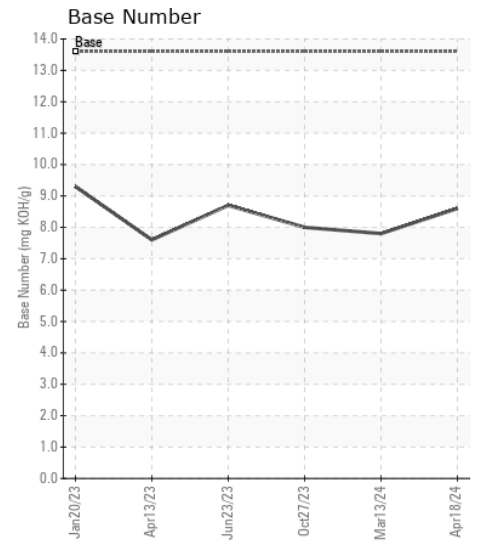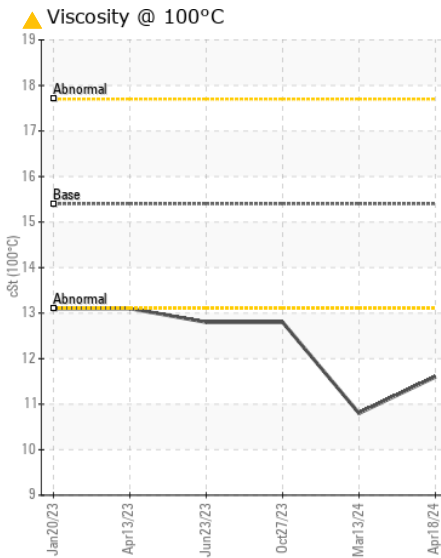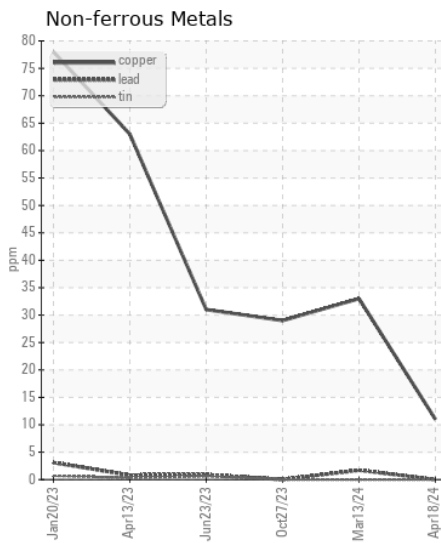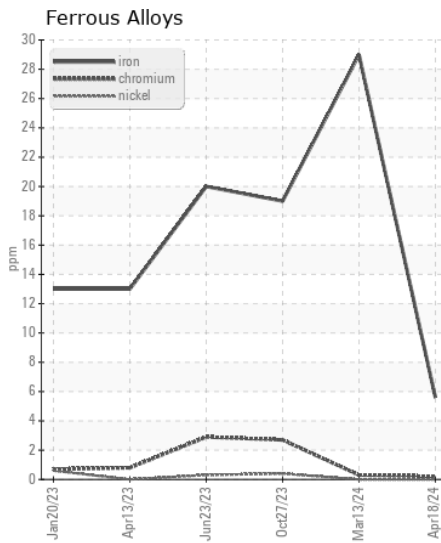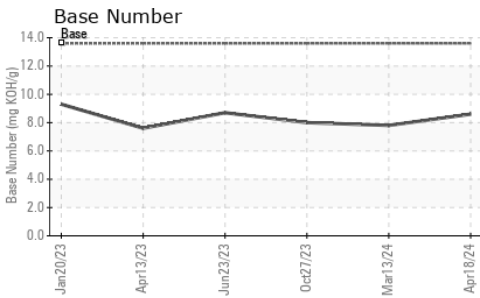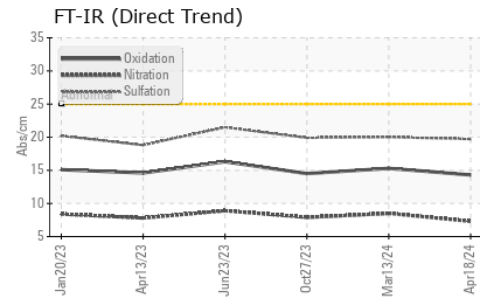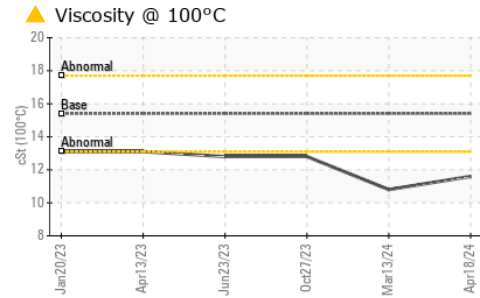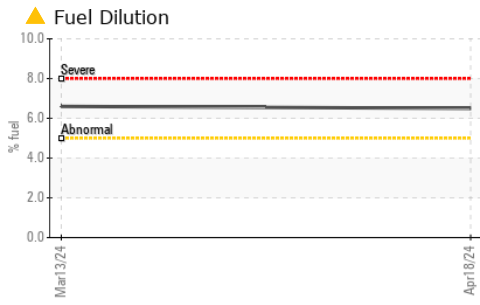

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0196224 **Received** : 23 Apr 2024
Lab Number : 06157413 **Tested** : 25 Apr 2024
Unique Number : 10992836 **Diagnosed** : 25 Apr 2024 - Wes Davis
Test Package : CONST (Additional Tests: PercentFuel, TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

DIVERSIFIED BIO-MASS
 606 SUNYDALE DR
 WILMINGTON, NC
 US 28412
 Contact: CHRIS DAWSON
 chris@tubgrinding.com
 T: (914)279-6817
 F: (910)793-6227