



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**(86J5TW)**  
Machine Id  
**727101-361671**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0065699</b>	GFL0090258	GFL0090153
Sample Date		Client Info		<b>09 Apr 2024</b>	13 Oct 2023	05 Oct 2023
Machine Age	hrs	Client Info		<b>0</b>	6231	6168
Oil Age	hrs	Client Info		<b>0</b>	150	150
Filter Age	hrs	Client Info		<b>0</b>	150	150
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	SEVERE

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	<b>17</b>	8	24
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	1	<1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>15	<b>1</b>	1	5
Lead	ppm	ASTM D5185m	>25	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m	>100	<b>&lt;1</b>	2	2
Tin	ppm	ASTM D5185m	>4	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	<b>3</b>	4	8
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	3	7
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	1.0	▲ 11.3
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>6	<b>0.6</b>	0.3	0.8
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.4</b>	5.7	7.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.8</b>	17.8	19.6
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>4</b>	4	36
Boron	ppm	ASTM D5185m	0	<b>0</b>	2	7
Barium	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>63</b>	53	51
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m	1010	<b>945</b>	803	793
Calcium	ppm	ASTM D5185m	1070	<b>1077</b>	926	877
Phosphorus	ppm	ASTM D5185m	1150	<b>1042</b>	922	885
Zinc	ppm	ASTM D5185m	1270	<b>1307</b>	1052	1058
Sulfur	ppm	ASTM D5185m	2060	<b>3665</b>	2717	2829
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.3</b>	13.1	15.0
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>8.6</b>	8.2	7.1
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.7</b>	14.0	▲ 10.00


**FT-IR (Direct Trend)**

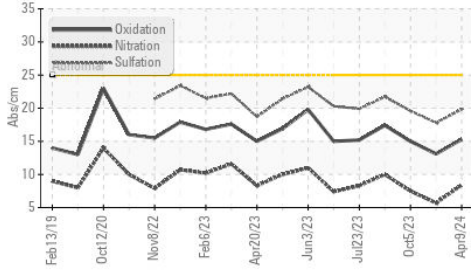


**Base Number**

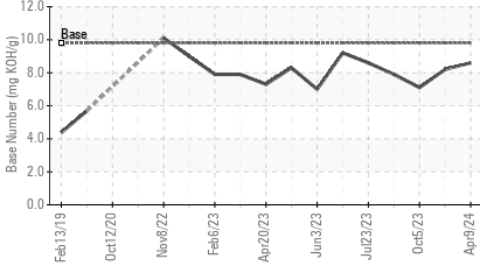


**Viscosity @ 100°C**

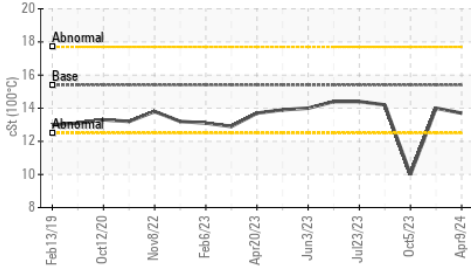


**Ferrous Alloys**

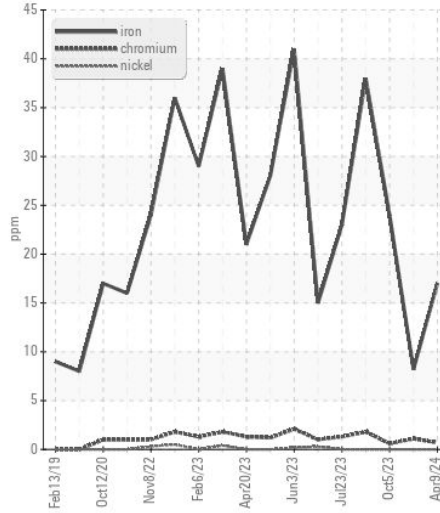


**Non-ferrous Metals**

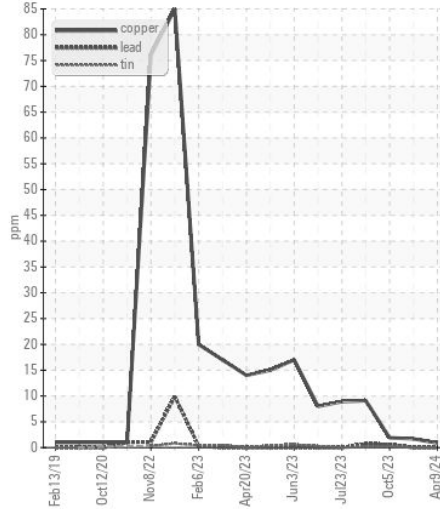

**Viscosity @ 100°C**

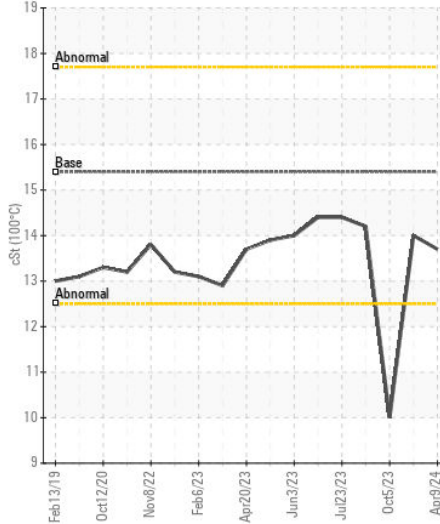

**Base Number**

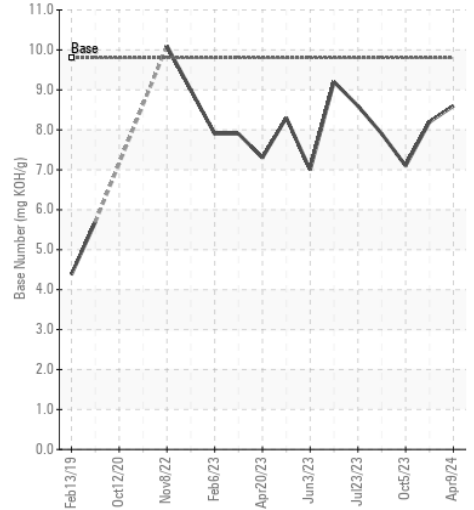

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0065699  
**Lab Number** : 06157486  
**Unique Number** : 10992909  
**Test Package** : FLEET

**Received** : 23 Apr 2024  
**Tested** : 24 Apr 2024  
**Diagnosed** : 24 Apr 2024 - Wes Davis

**GFL Environmental - 823 - Central Missouri Hauling**  
 24461 Oak Grove Lane  
 Sedalia, MO  
 US 65301

Contact: Terry Randolph  
 trandolph@gflenv.com

T: (660)631-2116

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)