



Machine Id  
**JOHN DEERE 550P 1T0550PAVPLX02157**

Component  
**Hydraulic System**

Fluid  
**JOHN DEERE ZINC-FREE HYDRAULIC OIL 46 (--- GAL)**

**RECOMMENDATION**

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0212982</b>	---	---
Sample Date		Client Info		<b>21 Apr 2024</b>	---	---
Machine Age	hrs	Client Info		<b>493</b>	---	---
Oil Age	hrs	Client Info		<b>493</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Not Chngd</b>	---	---
Filter Changed		Client Info		<b>Not Chngd</b>	---	---
Sample Status				<b>ATTENTION</b>	---	---

**WEAR**

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
Iron	ppm	ASTM D5185m	>20	<b>3</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>10	<b>2</b>	---	---
Lead	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m	>75	<b>4</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

**CONTAMINATION**

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


Silicon	ppm	ASTM D5185m	>20	<b>1</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	---	---
Water		WC Method	>0.1	<b>NEG</b>	---	---
Particles >4µm		ASTM D7647	>5000	<b>1832</b>	---	---
Particles >6µm		ASTM D7647	>1300	<b>482</b>	---	---
Particles >14µm		ASTM D7647	>160	<b>31</b>	---	---
Particles >21µm		ASTM D7647	>40	<b>7</b>	---	---
Particles >38µm		ASTM D7647	>10	<b>0</b>	---	---
Particles >71µm		ASTM D7647	>3	<b>0</b>	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>18/16/12</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---	---

**FLUID CONDITION**


The oil viscosity is higher than normal. Confirm oil type. The AN level is acceptable for this fluid.

Sodium	ppm	ASTM D5185m		<b>0</b>	---	---
Boron	ppm	ASTM D5185m		<b>0</b>	---	---
Barium	ppm	ASTM D5185m		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>1</b>	---	---
Calcium	ppm	ASTM D5185m		<b>81</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>616</b>	---	---
Zinc	ppm	ASTM D5185m		<b>829</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>1673</b>	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.06	<b>0.82</b>	---	---
Visc @ 40°C	cSt	ASTM D445	47	<b>58.15</b>	---	---

● Viscosity @ 40°C


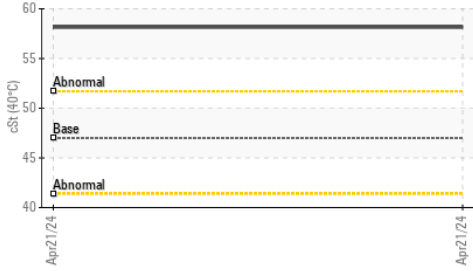


Ferrous Alloys

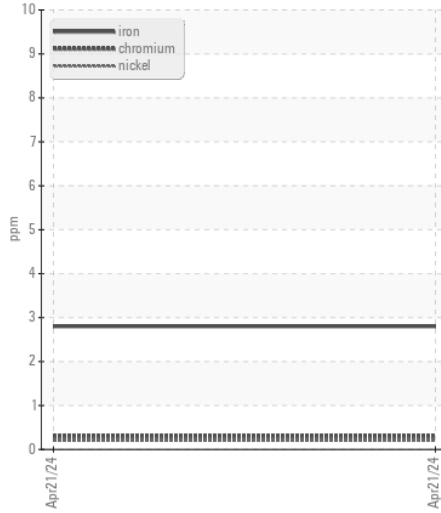


Particle Count


Particle Count

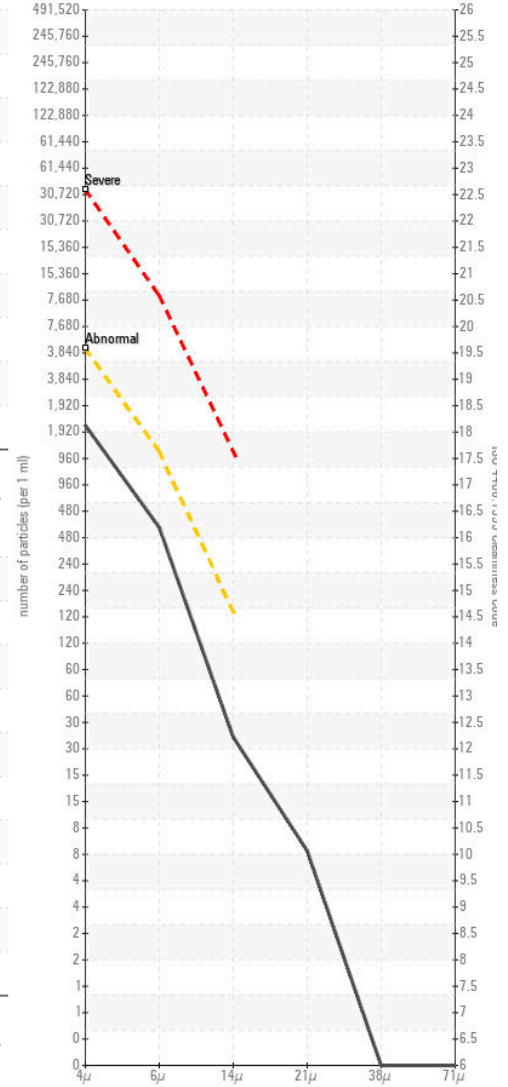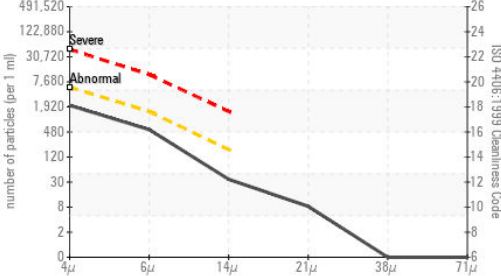


Non-ferrous Metals

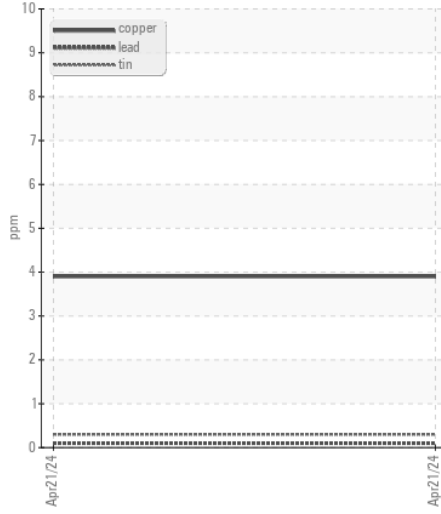


Acid Number

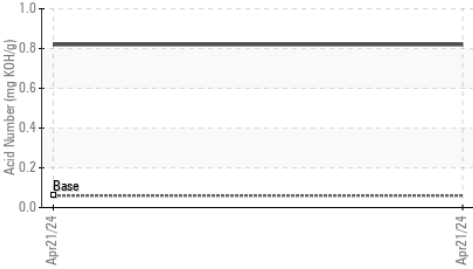


PQ

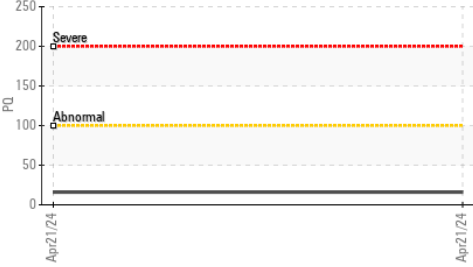


Particle Trend

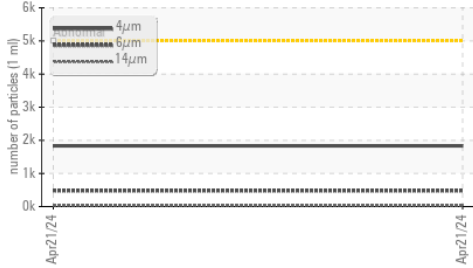

● Viscosity @ 40°C

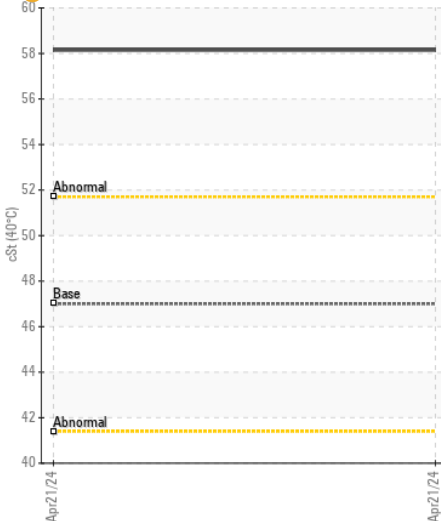

Acid Number

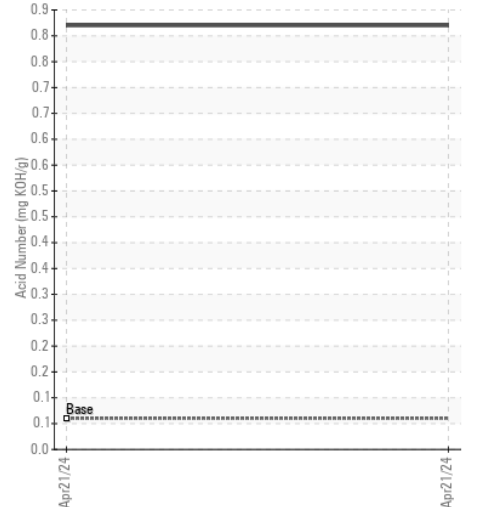

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0212982 **Received** : 23 Apr 2024  
**Lab Number** : 06157543 **Tested** : 26 Apr 2024  
**Unique Number** : 10992966 **Diagnosed** : 29 Apr 2024 - Jonathan Hester  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - GARNER**  
 4161 AUBURN CHURCH RD  
 GARNER, NC  
 US 27529

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Contact: RALEIGH SHOP  
 sean.betts@jamesriverequipment.com; catherine.anastasio@wearcheck.com

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

T: (919)614-2260  
 F: (919)779-5432

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)