



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id  
**LOW FIRMNESS**

Component  
**Hydraulic System**

Fluid  
**AW HYDRAULIC OIL ISO 46 (--- GAL)**

## RECOMMENDATION

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. We recommend an early resample to monitor this condition. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

## WEAR

All component wear rates are normal.










## CONTAMINATION

There is a moderate amount of particulates (2 to 100 microns in size) present in the oil. The system cleanliness is above the acceptable limit for the target ISO 4406 cleanliness code.

## FLUID CONDITION

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0859523</b>	WC0859521	WC0859519
Sample Date		Client Info		<b>12 Apr 2024</b>	13 Mar 2024	12 Feb 2024
Machine Age	wks	Client Info		<b>0</b>	0	0
Oil Age	wks	Client Info		<b>0</b>	0	0
Filter Age	wks	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>ABNORMAL</b>	ABNORMAL	ATTENTION
Iron	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	0
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	0	0
Lead	ppm	ASTM D5185m	>20	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	0
Tin	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Silicon	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	1
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	0
Water		WC Method	>0.05	<b>NEG</b>	NEG	NEG
Particles >4µm		ASTM D7647	>2500	<b>▲ 10024</b>	▲ 13100	1366
Particles >6µm		ASTM D7647	>640	<b>▲ 3140</b>	▲ 4093	● 695
Particles >14µm		ASTM D7647	>80	<b>▲ 402</b>	▲ 440	● 114
Particles >21µm		ASTM D7647	>20	<b>▲ 115</b>	▲ 111	● 37
Particles >38µm		ASTM D7647	>4	<b>5</b>	5	3
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>18/16/13	<b>▲ 21/19/16</b>	▲ 21/19/16	● 18/17/14
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	<b>NEG</b>	NEG	NEG
Sodium	ppm	ASTM D5185m		<b>0</b>	<1	0
Boron	ppm	ASTM D5185m	5	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	5	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	5	<b>&lt;1</b>	0	0
Manganese	ppm	ASTM D5185m		<b>0</b>	0	0
Magnesium	ppm	ASTM D5185m	25	<b>&lt;1</b>	0	0
Calcium	ppm	ASTM D5185m	200	<b>42</b>	40	44
Phosphorus	ppm	ASTM D5185m	300	<b>314</b>	320	328
Zinc	ppm	ASTM D5185m	370	<b>437</b>	412	398
Sulfur	ppm	ASTM D5185m	2500	<b>870</b>	911	828
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	<b>0.36</b>	0.38	0.447
Visc @ 40°C	cSt	ASTM D445	46	<b>43.4</b>	49.4	43.2

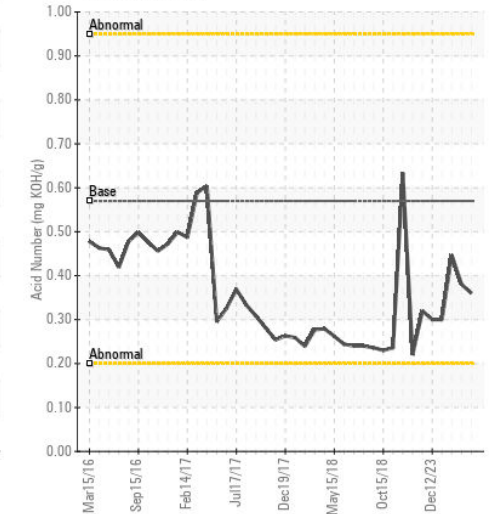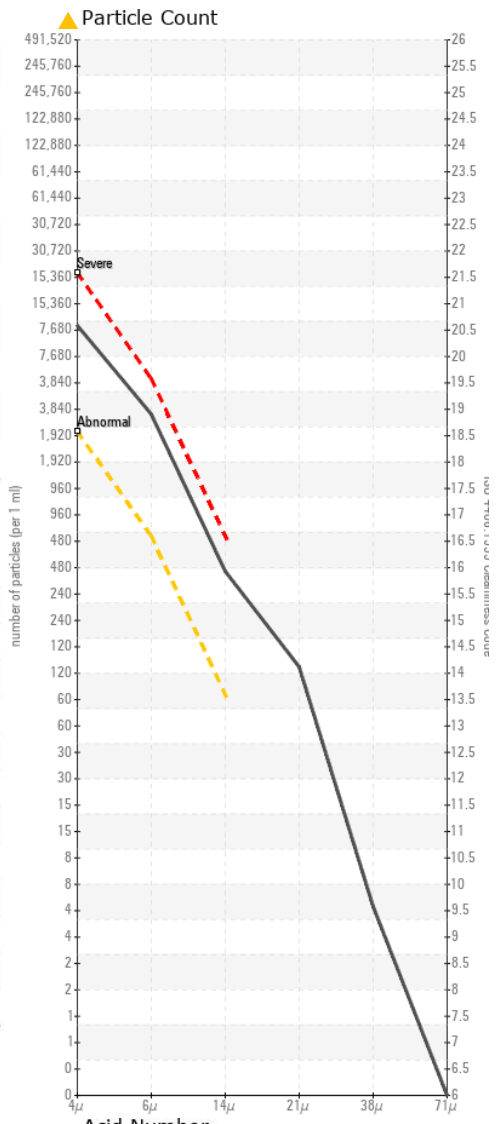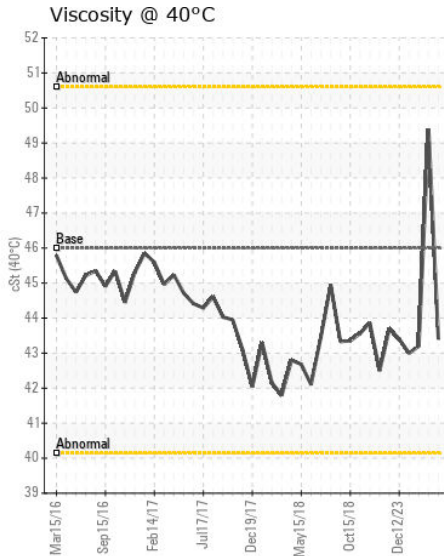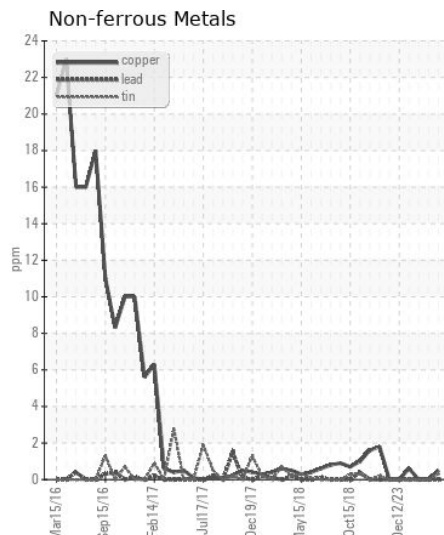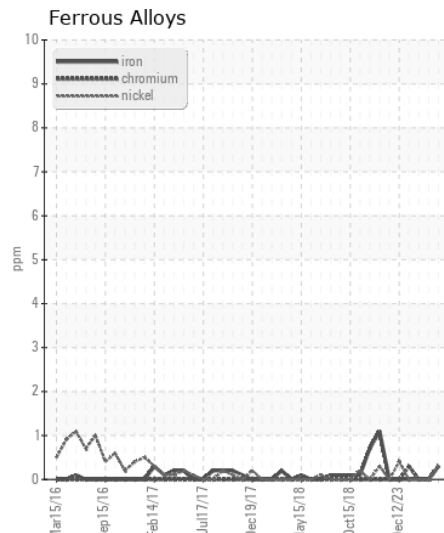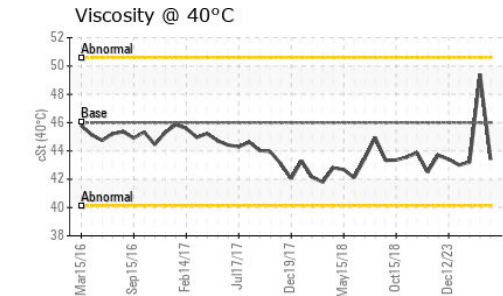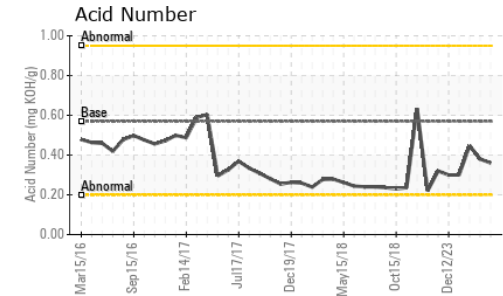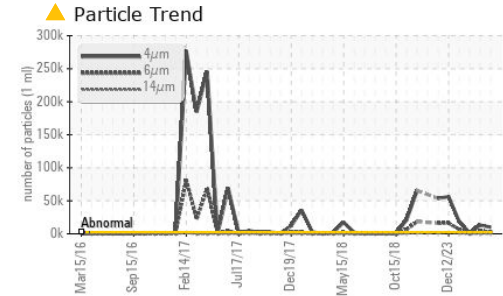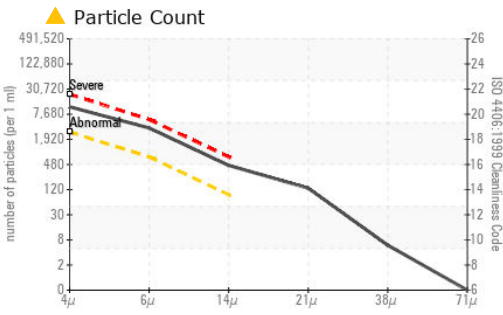

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0859523  
**Lab Number** : 06157653  
**Unique Number** : 10993076  
**Test Package** : IND 2  
**Received** : 23 Apr 2024  
**Tested** : 24 Apr 2024  
**Diagnosed** : 24 Apr 2024 - Wes Davis

**WOODBIDGE CORPORATION**  
 2399 SOUTH STONE MOUNTAIN  
 LITHONIA, GA  
 US 30058  
 Contact: MIKE FRYER  
 mike\_fryer@woodbridgegroup.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)