



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION



Area
[SWA538928 PALM BEACH]

Machine Id
VOLVO A40G 353295

Component
Front Axle

Fluid
VOLVO PREMIUM GEAR OIL 85W-140 GL-5 (--- GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP443775	---	---
Sample Date		Client Info		18 Apr 2024	---	---
Machine Age	hrs	Client Info		3858	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ATTENTION	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	535	---	---
Chromium	ppm	ASTM D5185m	>20	7	---	---
Nickel	ppm	ASTM D5185m	>10	2	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>30	2	---	---
Lead	ppm	ASTM D5185m	>50	<1	---	---
Copper	ppm	ASTM D5185m	>150	4	---	---
Tin	ppm	ASTM D5185m	>20	0	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	7	---	---
Potassium	ppm	ASTM D5185m	>20	6	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The oil viscosity is lower than normal. This plus the additive levels indicates the addition of a different brand, or type of oil. Confirm oil type.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m	111	187	---	---
Barium	ppm	ASTM D5185m	0.0	0	---	---
Molybdenum	ppm	ASTM D5185m	0.9	3	---	---
Manganese	ppm	ASTM D5185m	0.0	14	---	---
Magnesium	ppm	ASTM D5185m	39	2	---	---
Calcium	ppm	ASTM D5185m	93	60	---	---
Phosphorus	ppm	ASTM D5185m	920	2440	---	---
Zinc	ppm	ASTM D5185m	104	33	---	---
Sulfur	ppm	ASTM D5185m	20179	29625	---	---
Visc @ 40°C	cSt	ASTM D445	333	51.5	---	---

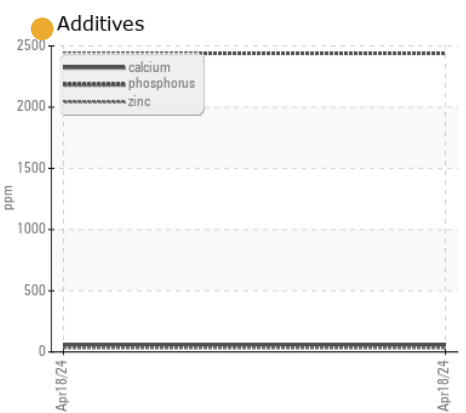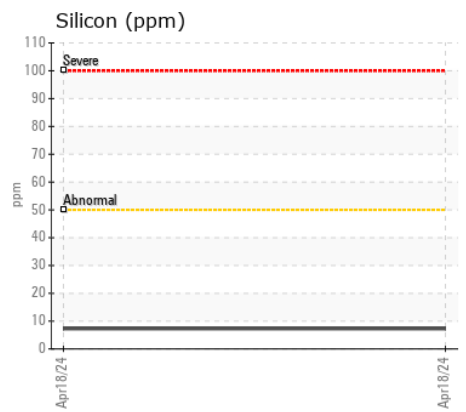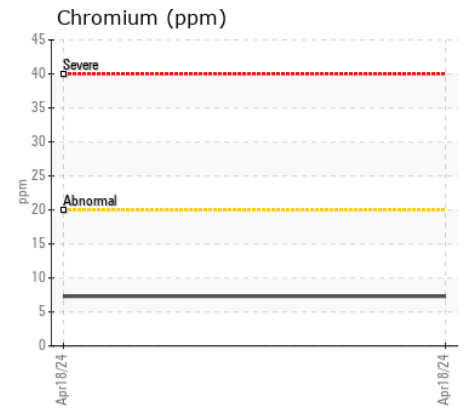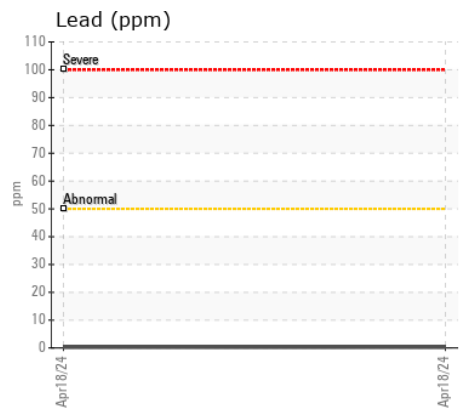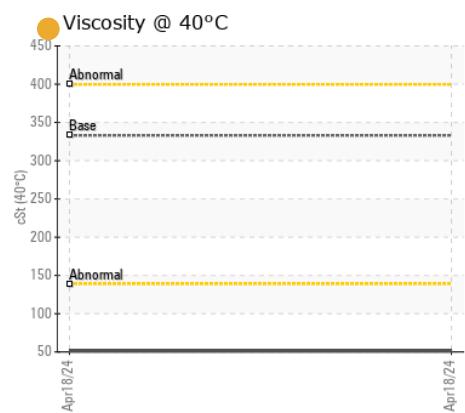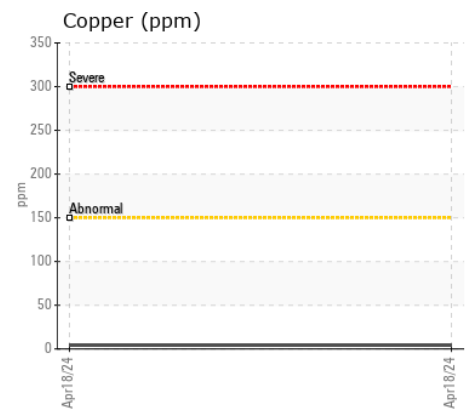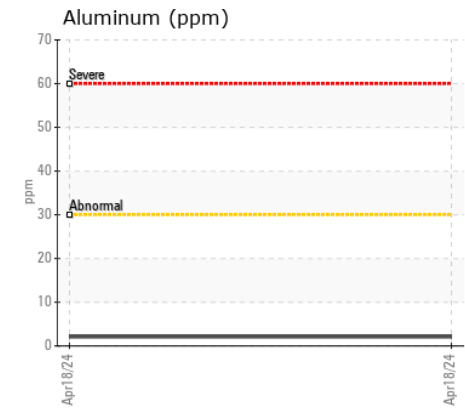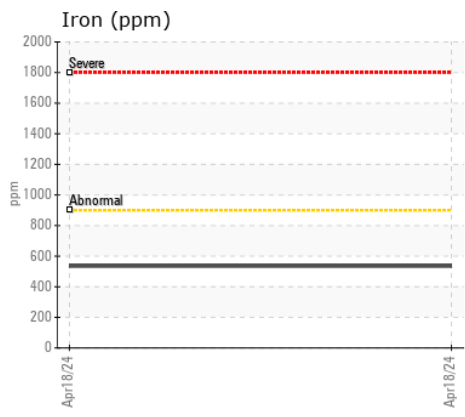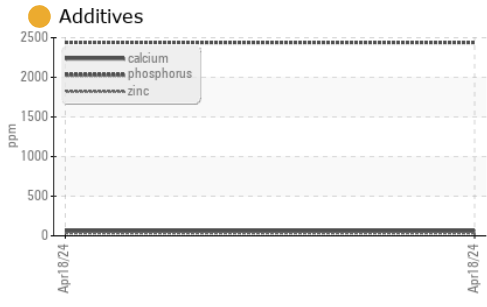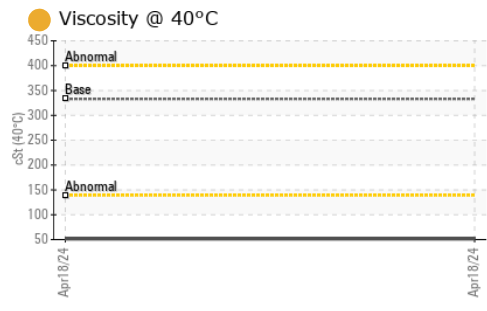

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP443775 **Received** : 23 Apr 2024
Lab Number : 06158080 **Tested** : 24 Apr 2024
Unique Number : 10993503 **Diagnosed** : 25 Apr 2024 - Don Baldrige
Test Package : MOB 1

PALM BEACH AGGREGATES INC
 PO BOX 700, 20125 STATE RD 80
 LOXAHATCHEE, FL
 US 33470
 Contact: WILLIAM GONZALEZ
 wgonzalez@palmbeachag.com
 T: (561)723-0194
 F: (561)798-5380

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)