



# ASCENDUM

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**VOLVO L150H 7053**  
Component  
**Front Axle**  
Fluid  
**VOLVO SUPER WET BRAKE TRANSAXLE OIL WB102 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>ASC0010273</b>	ASC0002509	VCP413510
Sample Date		Client Info		<b>28 Mar 2024</b>	20 Nov 2023	25 Sep 2023
Machine Age	hrs	Client Info		<b>5486</b>	4527	4113
Oil Age	hrs	Client Info		<b>5072</b>	414	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	Not Changd	Changed
Filter Changed		Client Info		<b>N/A</b>	Not Changd	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	<b>10</b>	9	54
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	2
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>2</b>	<1	3
Lead	ppm	ASTM D5185m	>50	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185m	>120	<b>6</b>	4	12
Tin	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>9</b>	9	15
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>LIGHT</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	2	5
Boron	ppm	ASTM D5185m		<b>121</b>	124	144
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>3</b>	2	5
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	4
Magnesium	ppm	ASTM D5185m		<b>13</b>	16	23
Calcium	ppm	ASTM D5185m		<b>3441</b>	3687	3823
Phosphorus	ppm	ASTM D5185m		<b>1360</b>	1263	1297
Zinc	ppm	ASTM D5185m		<b>1497</b>	1600	1581
Sulfur	ppm	ASTM D5185m		<b>3927</b>	3886	4191
Visc @ 40°C	cSt	ASTM D445	55	<b>42.2</b>	42.8	42.3

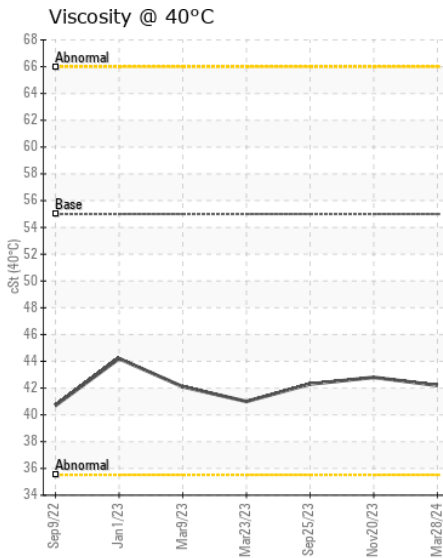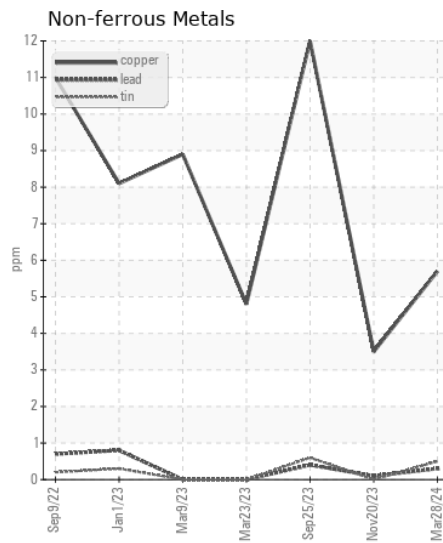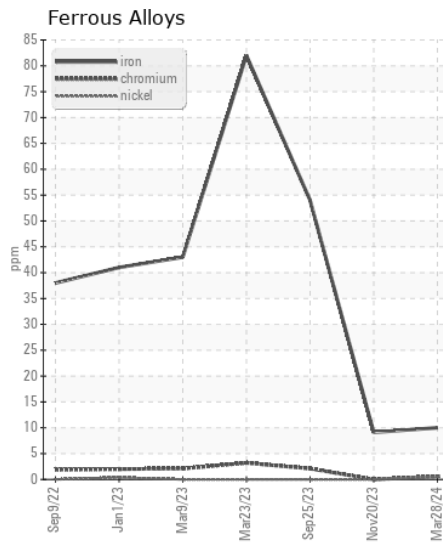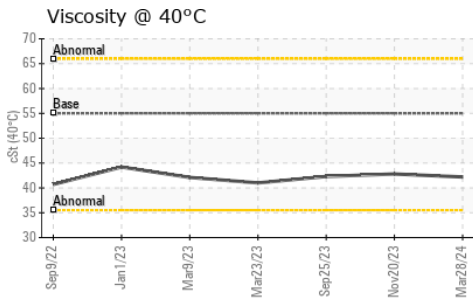

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ASC0010273  
**Lab Number** : 06158109  
**Unique Number** : 10993532  
**Test Package** : CONST

**Received** : 23 Apr 2024  
**Tested** : 24 Apr 2024  
**Diagnosed** : 24 Apr 2024 - Wes Davis

**113 - ASCENDUM MACHINERY INC - GARNER**  
 3561 JONES SAUSAGE ROAD  
 GARNER, NC  
 US 27529

Contact: TRENT BROADWELL  
 trent.broadwell@ascendummachinery.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (919)661-8817  
 F: (919)661-9038