



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
Ascendum Machinery/500 Hour CSA
Machine Id
VOLVO L150H 2263 (S/N L150HV7093)
Component
Transmission (Auto)
Fluid
DEXRON III (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DEXRON III. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0010248	VCP436534	ASC0006048
Sample Date		Client Info		17 Apr 2024	19 Feb 2024	13 Dec 2023
Machine Age	hrs	Client Info		4005	3554	3041
Oil Age	hrs	Client Info		4005	1554	3041
Filter Age	hrs	Client Info		4005	0	304
Oil Changed		Client Info		Changed	Not Changd	Not Changd
Filter Changed		Client Info		Changed	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>300	108	63	82
Chromium	ppm	ASTM D5185m	>3	<1	<1	<1
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>5	<1	2	0
Lead	ppm	ASTM D5185m	>3	0	0	0
Copper	ppm	ASTM D5185m	>25	17	11	15
Tin	ppm	ASTM D5185m	>4	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	9	6	9
Potassium	ppm	ASTM D5185m	>20	<1	2	0
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	LIGHT	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		4	0	5
Boron	ppm	ASTM D5185m		68	85	62
Barium	ppm	ASTM D5185m		5	3	3
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		4	2	4
Magnesium	ppm	ASTM D5185m		1	1	0
Calcium	ppm	ASTM D5185m		127	69	77
Phosphorus	ppm	ASTM D5185m		206	183	192
Zinc	ppm	ASTM D5185m		37	12	12
Sulfur	ppm	ASTM D5185m		2410	1734	1697
Visc @ 40°C	cSt	ASTM D445	35.0	27.4	28.0	28.0

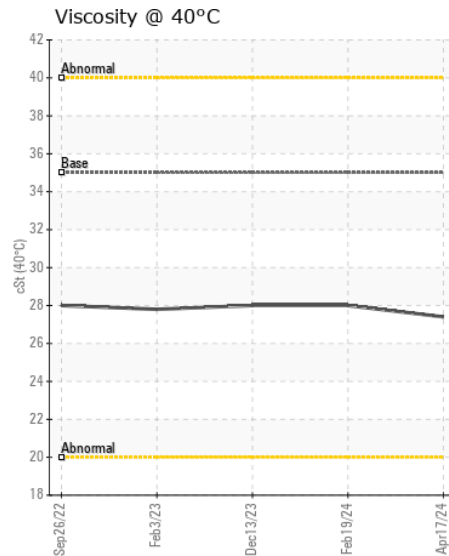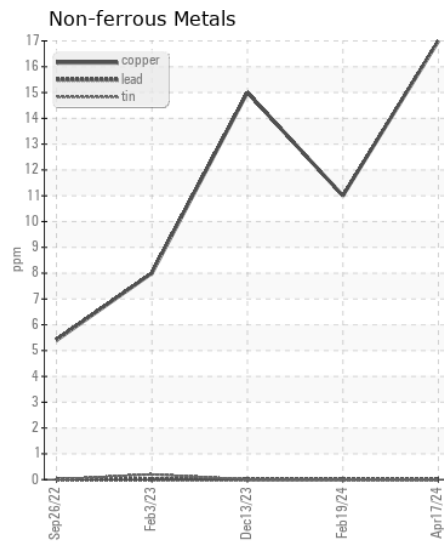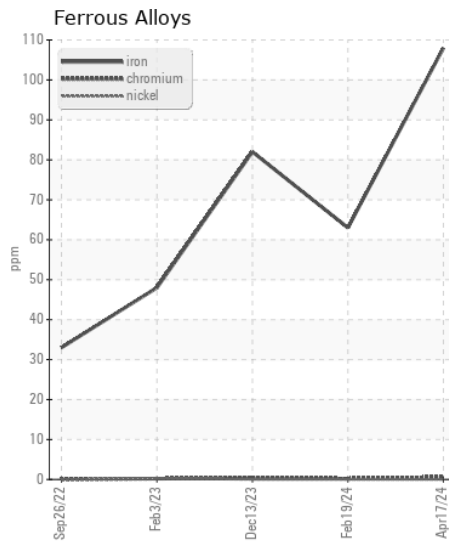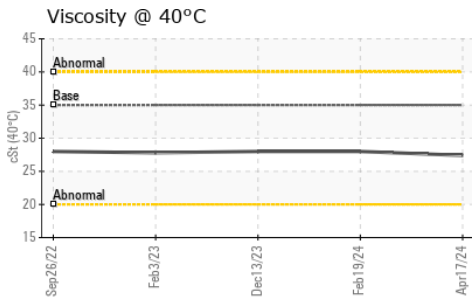

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : ASC0010248

Lab Number : 06158132

Unique Number : 10993555

Test Package : CONST

Received : 23 Apr 2024

Tested : 24 Apr 2024

Diagnosed : 24 Apr 2024 - Wes Davis

G S MATERIALS INC

PO BOX 1335

BURLINGTON, NC

US 27216

Contact: KAREN NEWPORT

Gsmaterials@windstream.net

T: (919)499-9322

F: (919)499-2097

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)