

[PMOAS3372441] Machine Id NFA655G53420

Component Diesel Fuel

No.2 DIESEL FUEL (ULTRALOW SULPHUR) (--- QTS)

RECOMMENDATION

All laboratory tests indicate that this sample meets specifications for No.2 low-sulfur diesel fuel.

CORROSION

All metal levels are normal indicating no corrosion in the system.


CONTAMINANTS

FUEL CONDITION


The water content is negligible. There is no bacteria or fungus (yeast and/or mold) indicated in the sample. There is no indication of any contamination in the fuel.


Sulfur value derived by ASTM D5453 method for ULSD validation.

· · · · · · · · · · · · · · · · · · ·						
Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DC0034662		
Sample Date		Client Info		19 Apr 2024		
Machine Age	hrs	Client Info		708		
Sample Status				NORMAL		
Aluminum	ppm	ASTM D5185m	<0.1	0		
Nickel	ppm	ASTM D5185m	<0.1	0		
Lead	ppm	ASTM D5185m	<0.1	0		
Vanadium	ppm	ASTM D5185m	<0.1	0		
Iron	ppm	ASTM D5185m	<0.1	0		
Silicon	ppm	ASTM D5185m	<1.0	0		
Sodium	ppm	ASTM D5185m	<0.1	0		
Potassium	ppm	ASTM D5185m	<0.1	0		
Water	%	ASTM D6304	<0.05	0.003		
ppm Water	ppm	ASTM D6304	<500	40		
% Gasoline	%	*In-House	<0.50	0.0		
% Biodiesel	%	*In-House	<20.0	0.0		
Calcium	ppm	ASTM D5185m	<0.1	0		
Magnesium	ppm	ASTM D5185m	<0.1	0		
Phosphorus	ppm	ASTM D5185m	<0.1	2		
Zinc	ppm	ASTM D5185m	<0.1	<1		
ASTM Color	scalar	*ASTM D1500		L4.5		
Visc @ 40°C	cSt	ASTM D445	3.0	2.4		
Sulfur	ppm	ASTM D5185m	10	0		
Sulfur (UVF)	ppm	ASTM D5453		18		
API Gravity		ASTM D7777	37.7	37.1		

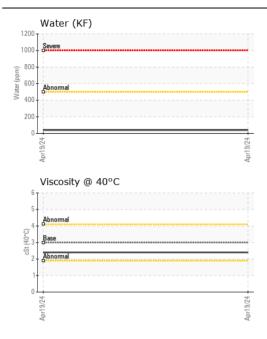

Pensky-Martens Flash Point (°C)

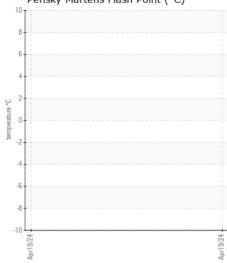

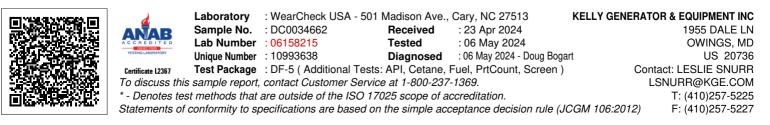

Contact/Location: LESLIE SNURR - KELOWI Page 2 of 2