WEAR CONTAMINATION FLUID CONDITION


NORMAL NORMAL NORMAL

Machine Id

441809

## Component Diesel Engine

DIESEL ENGINE OIL SAE 15W40 (19 QTS)							
RECOMMENDATION	Test	UOM	Method	Limit/Abn	Current	History1	History2
TECOMMENDATION	Sample Number	OOW	Client Info	LITTIU/ADTI	IL0034948	IL0031137	IL0028223
Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.	Sample Date		Client Info		27 Dec 2023	17 Jun 2023	15 Nov 2022
	Machine Age	mls	Client Info		300648	267933	238414
	Oil Age	mls	Client Info		14026	19185	34644
	Filter Age	mls	Client Info		14026	0	34644
	Oil Changed	0	Client Info		Changed	Changed	N/A
	Filter Changed		Client Info		Changed	Changed	N/A
	Sample Status				NORMAL	NORMAL	NORMAL
WEAR	Iron	ppm	ASTM D5185m	>100	15	41	107
	Chromium	ppm	ASTM D5185m	>20	<1	1	3
Metal levels are typical for a new component breaking in.	Nickel	ppm	ASTM D5185m	>4	0	<1	0
	Titanium	ppm	ASTM D5185m		0	0	0
	Silver	ppm	ASTM D5185m	>3	0	0	0
	Aluminum	ppm	ASTM D5185m	>20	3	8	17
	Lead	ppm	ASTM D5185m	>40	0	<1	0
	Copper	ppm	ASTM D5185m	>330	2	1	3
	Tin	ppm	ASTM D5185m	>15	0	<1	<1
	Vanadium	ppm	ASTM D5185m		0	0	0
	White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
	Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
CONTAMINATION	Silicon	ppm	ASTM D5185m	>25	3	6	9
	Potassium	ppm	ASTM D5185m	>20	0	5	7
There is no indication of any contamination in the oil.	Fuel		WC Method	>5	<1.0	<1.0	<1.0
	Water		WC Method	>0.2	NEG	NEG	NEG
	Glycol		WC Method		NEG	NEG	NEG
	Soot %	%	*ASTM D7844	>3	0.3	0.6	1.2
	Nitration	Abs/cm	*ASTM D7624	>20	8.8	11.9	19.2
	Sulfation	Abs/.1mm	*ASTM D7415	>30	20.6	26.3	34.4
	Silt	scalar	*Visual	NONE	NONE	NONE	NONE
	Debris	scalar	*Visual	NONE	NONE	NONE	NONE
	Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
	Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
	Odor	scalar	*Visual	NORML	NORML	NORML	NORML
	Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
FLUID CONDITION	Sodium	ppm	ASTM D5185m	>158	<1	2	3
The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.	Boron	ppm	ASTM D5185m		5	7	21
	Barium	ppm	ASTM D5185m		0	0	0
	Molybdenum	ppm	ASTM D5185m	100	65	71	49
	Manganese	ppm	ASTM D5185m		<1	<1	1
	Magnesium	ppm	ASTM D5185m		961	1030	570
	Calcium	ppm	ASTM D5185m		1076	1248	1992
	Phosphorus	ppm	ASTM D5185m		1020	1102	846
	Zinc	ppm	ASTM D5185m		1245	1372	1067
	Sulfur	ppm	ASTM D5185m		3686	3648	3102
	Oxidation	Abs/.1mm	*ASTM D7414		18.0	27.3	43.8
	Base Number (BN)				8.4	6.5	4.6
	Visc @ 100°C	cSt	ASTM D445	14.4	13.2	13.4	15.0

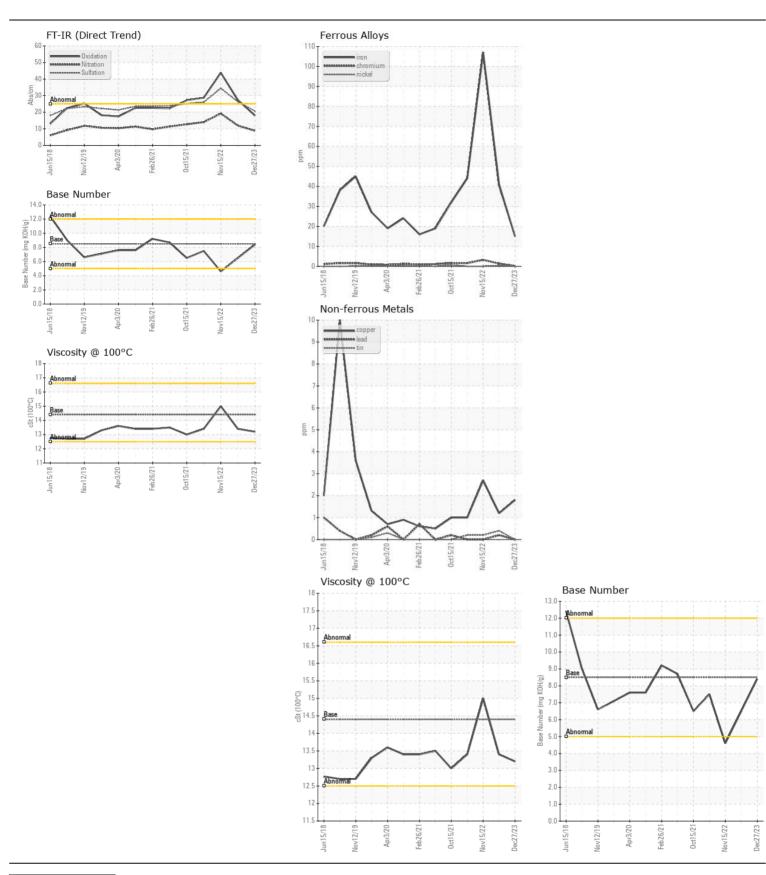





Laboratory Sample No.

: IL0034948 Lab Number : 06158305 Unique Number: 10993728 Test Package : FLEET

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 23 Apr 2024 **Tested** : 24 Apr 2024

: 24 Apr 2024 - Wes Davis Diagnosed

RUSH TRUCK LEASING - CLEVELAND IDEALEASE

5 ACORN DR OAKWOOD VILLAGE, OH

US 44146-5550

Contact: JOHN FOSTER FosterJ4@RushEnterprises.com

T: (440)359-7000 F: (440)439-5657

Certificate L2367

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Report Id: IDECLE [WUSCAR] 06158305 (Generated: 04/24/2024 14:34:25) Rev: 1