



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
314
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 10W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DC0036176	DC0022177	DC0024353
Sample Date		Client Info		12 Apr 2024	19 Oct 2022	04 Oct 2022
Machine Age	mls	Client Info		198594	162132	160953
Oil Age	mls	Client Info		15000	0	0
Filter Age	mls	Client Info		15000	0	0
Oil Changed		Client Info		Changed	N/A	Changed
Filter Changed		Client Info		Changed	N/A	Changed
Sample Status				NORMAL	NORMAL	ATTENTION

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	37	8	63
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	3	0	4
Lead	ppm	ASTM D5185m	>40	0	0	0
Copper	ppm	ASTM D5185m	>330	3	<1	2
Tin	ppm	ASTM D5185m	>15	0	0	<1
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	8	5	8
Potassium	ppm	ASTM D5185m	>20	3	<1	6
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	1	0.2	1.3
Nitration	Abs/cm	*ASTM D7624	>20	11.8	7.0	15.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.0	20.0	30.4
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		17	<1	1
Boron	ppm	ASTM D5185m	250	2	2	11
Barium	ppm	ASTM D5185m	10	0	0	0
Molybdenum	ppm	ASTM D5185m	100	58	46	52
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	450	917	771	664
Calcium	ppm	ASTM D5185m	3000	1304	1236	1717
Phosphorus	ppm	ASTM D5185m	1150	1047	881	954
Zinc	ppm	ASTM D5185m	1350	1309	1146	1185
Sulfur	ppm	ASTM D5185m	4250	3344	3390	3445
Oxidation	Abs/.1mm	*ASTM D7414	>25	21.3	15.4	28.8
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	5.7	10.2	6.2
Visc @ 100°C	cSt	ASTM D445	10.9	12.5	11.6	13.3

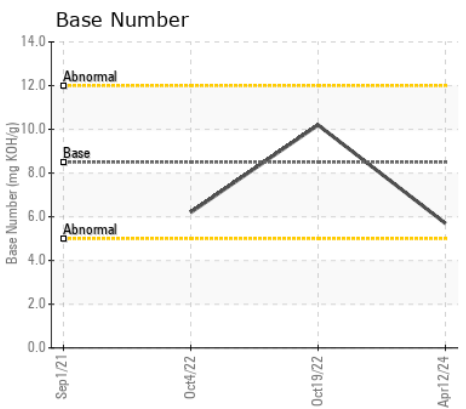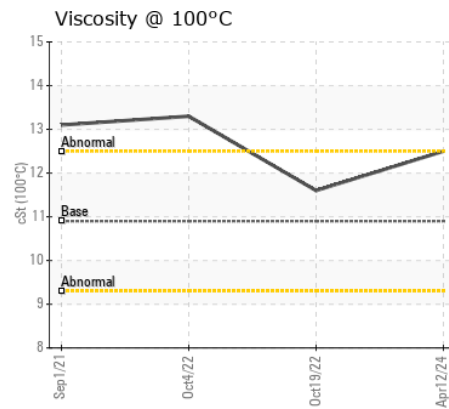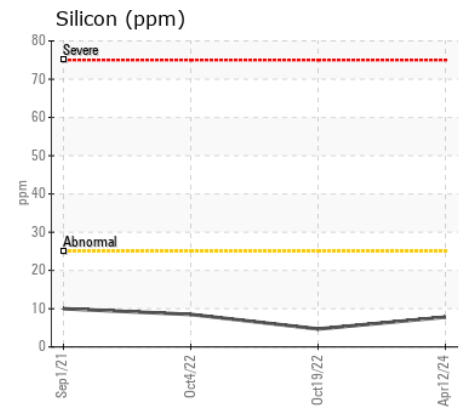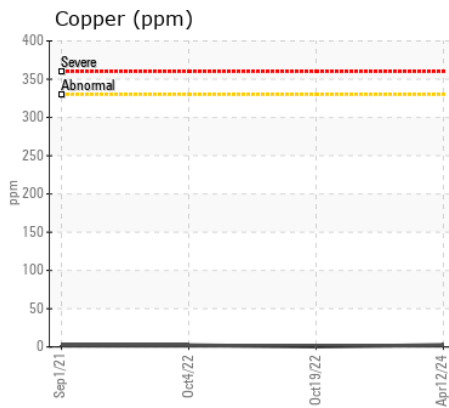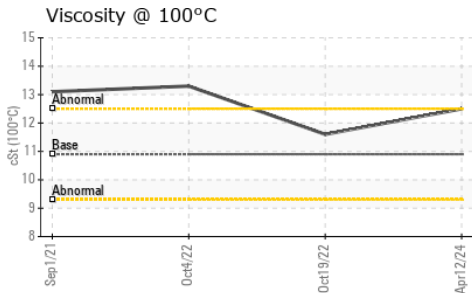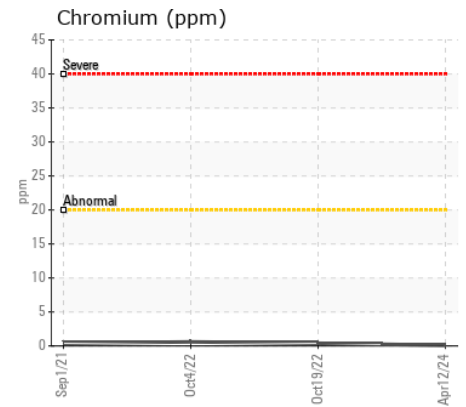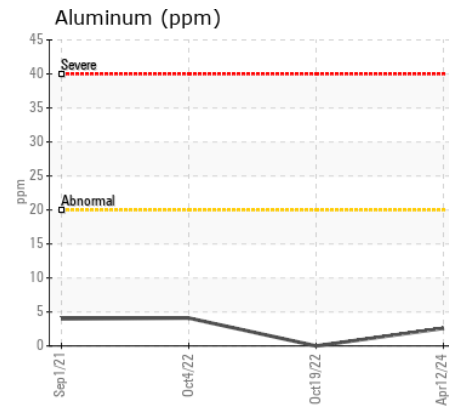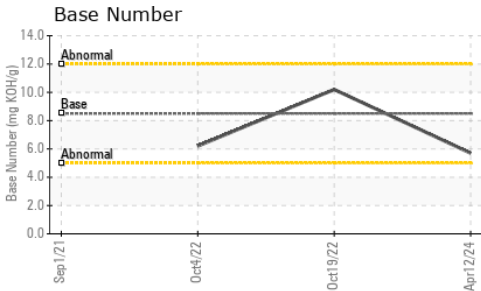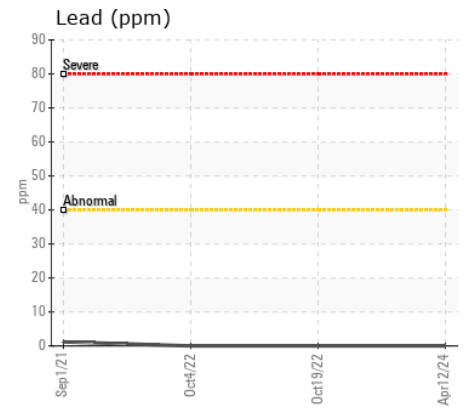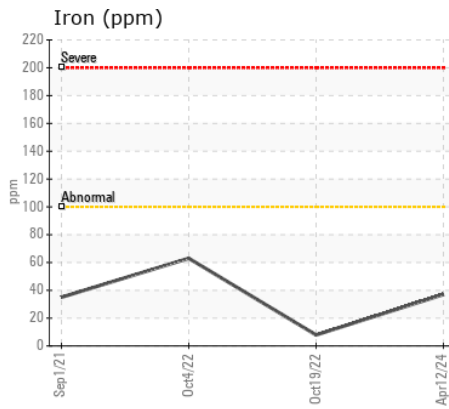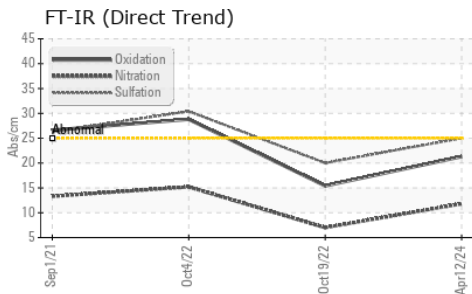

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DC0036176 **Received** : 23 Apr 2024
Lab Number : 06158319 **Tested** : 24 Apr 2024
Unique Number : 10993742 **Diagnosed** : 24 Apr 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

FRANCIS O DAY
 14900 SOUTHLAWN LN
 ROCKVILLE, MD
 US 20850
 Contact: JAMIE FORESTER

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: