



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION

Area
[W21799-MAYBERRY]
 Machine Id
JOHN DEERE 5045E 1PY5045EHNN121333
 Component
Diesel Engine
 Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0210834	---	---
Sample Date		Client Info		16 Apr 2024	---	---
Machine Age	hrs	Client Info		32	---	---
Oil Age	hrs	Client Info		32	---	---
Filter Age	hrs	Client Info		32	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ATTENTION	---	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>51	19	---	---
Chromium	ppm	ASTM D5185m	>11	<1	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>31	5	---	---
Lead	ppm	ASTM D5185m	>26	<1	---	---
Copper	ppm	ASTM D5185m	>26	9	---	---
Tin	ppm	ASTM D5185m	>4	1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION








Tests indicate that there is no fuel present in the oil. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	13	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Fuel	%	ASTM D3524	>2.1	0.3	---	---
Water		WC Method	>0.21	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	6.3	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.3	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.21	NEG	---	---

FLUID CONDITION

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Sodium	ppm	ASTM D5185m	>31	5	---	---
Boron	ppm	ASTM D5185m		290	---	---
Barium	ppm	ASTM D5185m		5	---	---
Molybdenum	ppm	ASTM D5185m		251	---	---
Manganese	ppm	ASTM D5185m		4	---	---
Magnesium	ppm	ASTM D5185m		827	---	---
Calcium	ppm	ASTM D5185m		1391	---	---
Phosphorus	ppm	ASTM D5185m		890	---	---
Zinc	ppm	ASTM D5185m		1014	---	---
Sulfur	ppm	ASTM D5185m		3682	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.8	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	11.0	---	---
Visc @ 100°C	cSt	ASTM D445	15.4	10.8	---	---

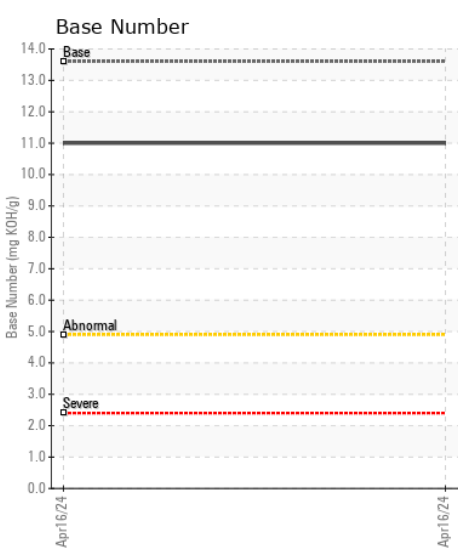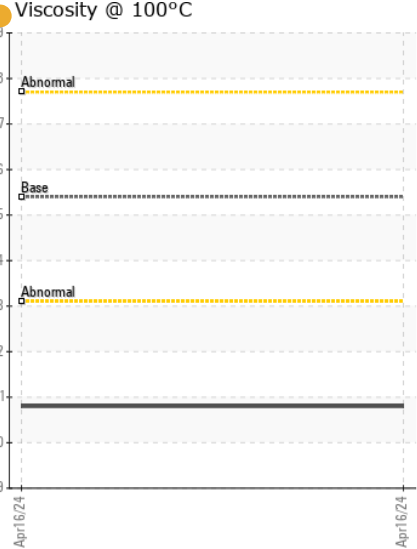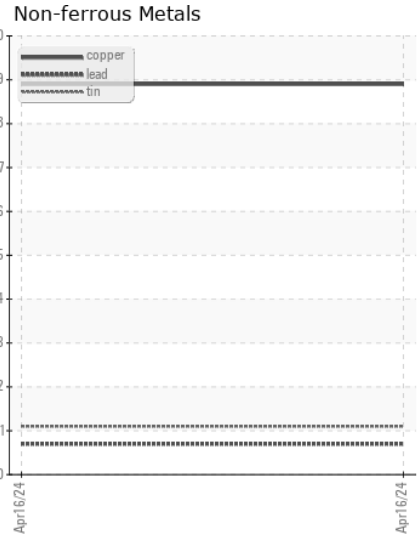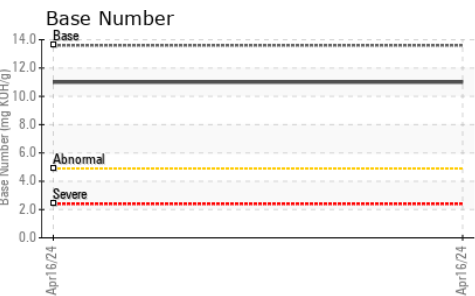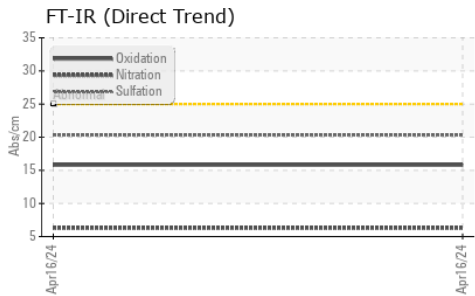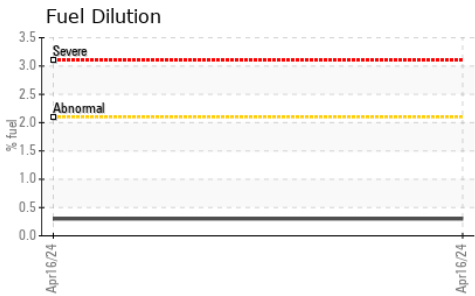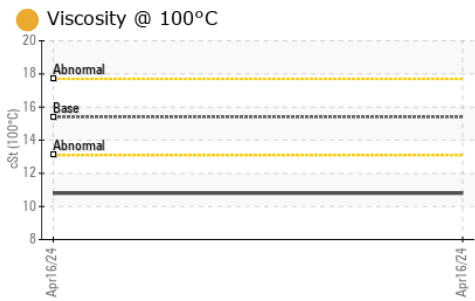

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0210834
Lab Number : 06158344
Unique Number : 10993767
Test Package : CONST (Additional Tests: FuelDilution, PercentFuel, TBN)

Received : 23 Apr 2024
Tested : 25 Apr 2024
Diagnosed : 25 Apr 2024 - Sean Felton

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - BURKEVILLE
 510 WEST COLONIAL DR
 BURKEVILLE, VA
 US 23922

Contact: RACHEL HARRIS
 RACHEL.HARRIS@JAMESRIVEREQUIPMENT.COM

T: (434)767-5578
 F: (434)767-3774