



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**JOHN DEERE 644K 1DW644KZLGF674754**  
Component  
**Diesel Engine**  
Fluid  
**JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- QTS)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0208005</b>	JR0201412	JR0201392
Sample Date		Client Info		<b>17 Apr 2024</b>	03 Apr 2024	06 Mar 2024
Machine Age	hrs	Client Info		<b>26220</b>	26160	25955
Oil Age	hrs	Client Info		<b>0</b>	205	207
Filter Age	hrs	Client Info		<b>0</b>	205	207
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	<b>3</b>	9	10
Chromium	ppm	ASTM D5185m	>11	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>31	<b>1</b>	2	2
Lead	ppm	ASTM D5185m	>26	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>26	<b>&lt;1</b>	1	3
Tin	ppm	ASTM D5185m	>4	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>22	<b>5</b>	6	6
Potassium	ppm	ASTM D5185m	>20	<b>6</b>	5	2
Fuel		WC Method	>2.1	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.21	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>5.7</b>	7.2	6.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.7</b>	19.1	18.6
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	<b>NEG</b>	NEG	NEG

### FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	<b>4</b>	15	12
Boron	ppm	ASTM D5185m		<b>153</b>	69	38
Barium	ppm	ASTM D5185m		<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m		<b>14</b>	38	49
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>172</b>	367	543
Calcium	ppm	ASTM D5185m		<b>2182</b>	1809	1575
Phosphorus	ppm	ASTM D5185m		<b>1069</b>	1148	1107
Zinc	ppm	ASTM D5185m		<b>1262</b>	1255	1275
Sulfur	ppm	ASTM D5185m		<b>4067</b>	3629	3600
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.0</b>	15.3	15.2
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	<b>8.3</b>	9.5	9.8
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.8</b>	13.2	13.1


**FT-IR (Direct Trend)**

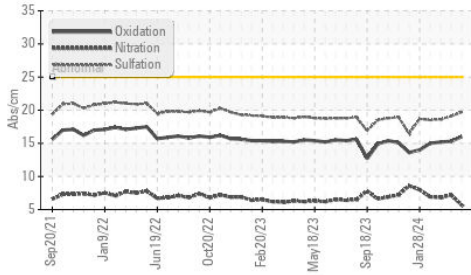


**Base Number**

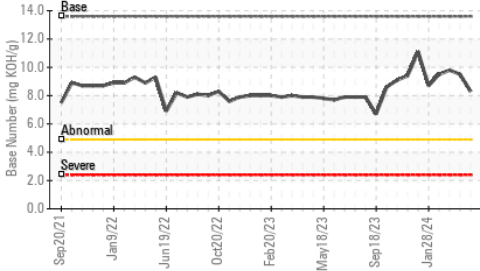


**Viscosity @ 100°C**

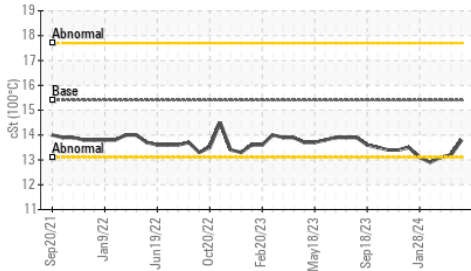


**Ferrous Alloys**

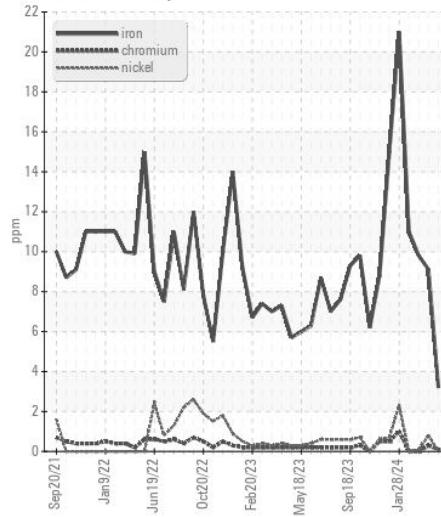


**Non-ferrous Metals**

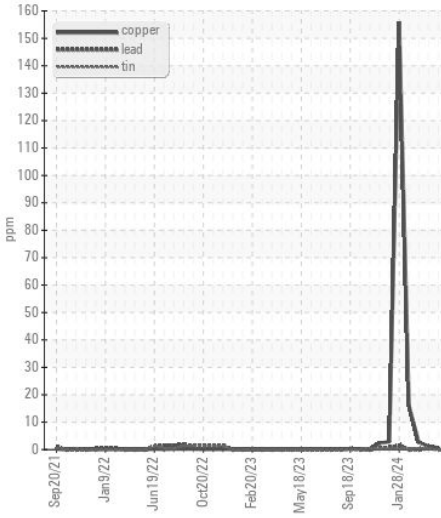

**Viscosity @ 100°C**

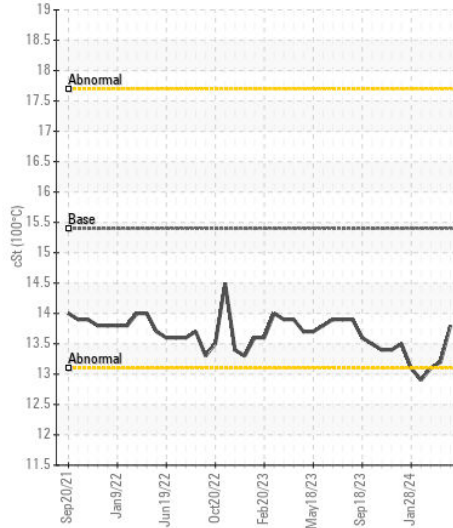

**Base Number**

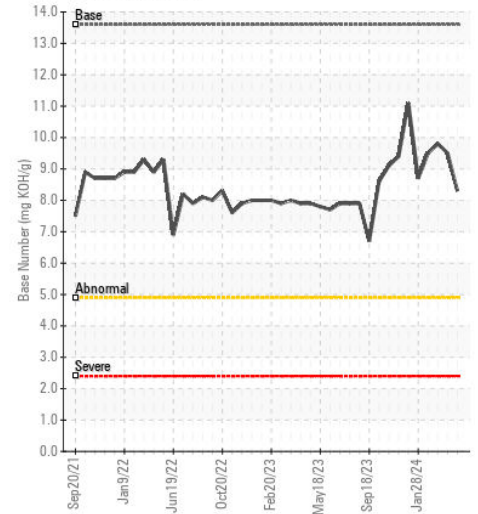

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0208005 **Received** : 23 Apr 2024  
**Lab Number** : 06158349 **Tested** : 24 Apr 2024  
**Unique Number** : 10993772 **Diagnosed** : 25 Apr 2024 - Jonathan Hester  
**Test Package** : CONST ( Additional Tests: TBN )

**Baxter Healthcare - Wood Boiler Biomass**  
 2859 OLD LINVILLE RD  
 MARION, NC  
 US 28752  
 Contact: RICKY STYLES  
 ricky\_styles@baxter.com  
 T: (828)756-4946  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)