



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 700K 1T0700KXAHF322935
 Component
Hydraulic System
 Fluid
JOHN DEERE HYDRAU (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0207866	JR0191330	JR0168287
Sample Date		Client Info		12 Apr 2024	20 Dec 2023	03 May 2023
Machine Age	hrs	Client Info		7793	7241	6621
Oil Age	hrs	Client Info		1625	1073	453
Filter Age	hrs	Client Info		1625	1073	453
Oil Changed		Client Info		Not Chngd	Not Chngd	Not Chngd
Filter Changed		Client Info		Not Chngd	Not Chngd	Not Chngd
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	17	15	12
Iron	ppm	ASTM D5185m	>23	4	0	2
Chromium	ppm	ASTM D5185m	>9	2	<1	1
Nickel	ppm	ASTM D5185m	>5	<1	0	<1
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>9	2	1	0
Lead	ppm	ASTM D5185m	>28	<1	0	<1
Copper	ppm	ASTM D5185m	>51	2	<1	<1
Tin	ppm	ASTM D5185m	>5	<1	0	1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	▲ MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>31	4	2	2
Potassium	ppm	ASTM D5185m	>20	1	2	2
Water		WC Method	>0.075	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>80000	1137	1358	---
Particles >6µm		ASTM D7647	>20000	180	227	---
Particles >14µm		ASTM D7647	>640	10	17	---
Particles >21µm		ASTM D7647	>160	2	7	---
Particles >38µm		ASTM D7647	>40	0	1	---
Particles >71µm		ASTM D7647	>10	0	0	---
Oil Cleanliness		ISO 4406 (c)	>23/21/16	17/15/10	18/15/11	---
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	0	3	4
Boron	ppm	ASTM D5185m		0	0	<1
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	0	2
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		4	0	13
Calcium	ppm	ASTM D5185m	87	135	113	234
Phosphorus	ppm	ASTM D5185m	727	703	611	661
Zinc	ppm	ASTM D5185m	900	846	788	858
Sulfur	ppm	ASTM D5185m	1500	1735	1351	2061
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.85	0.89	0.78
Visc @ 40°C	cSt	ASTM D445	65	58.6	59.3	59.4

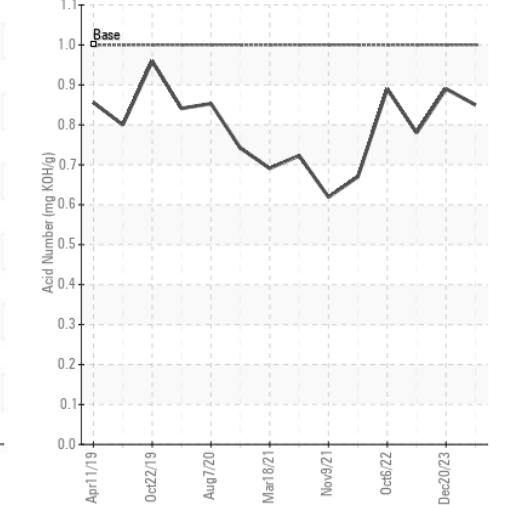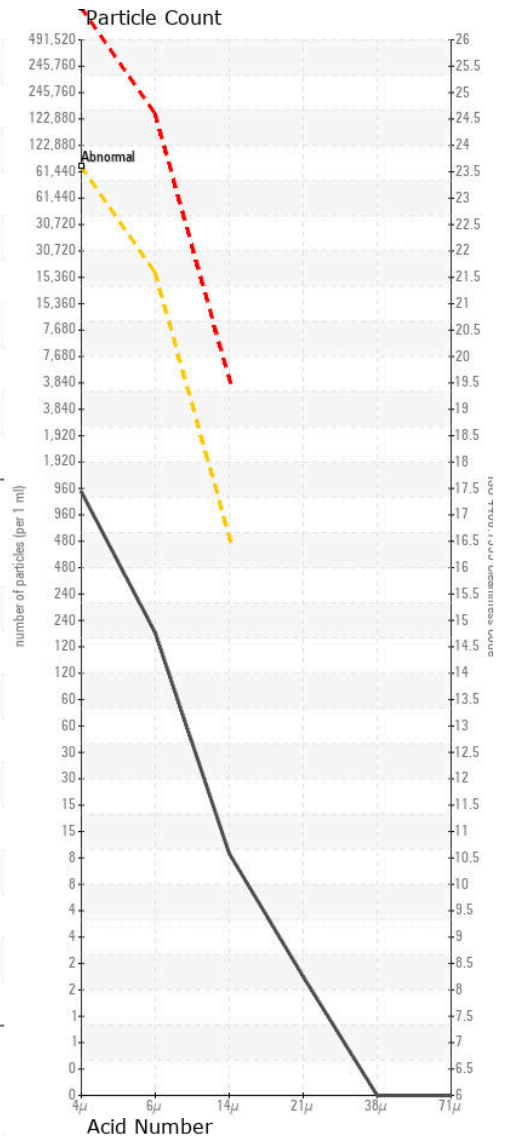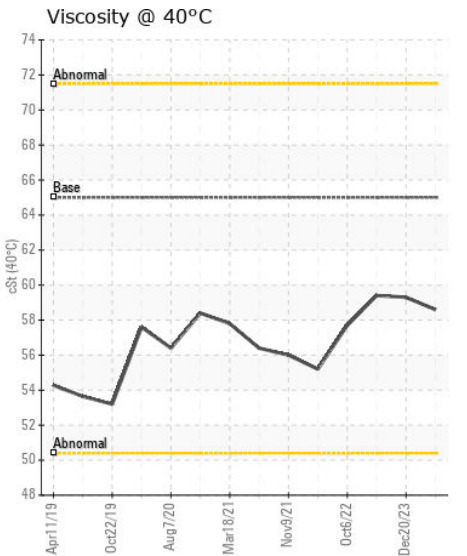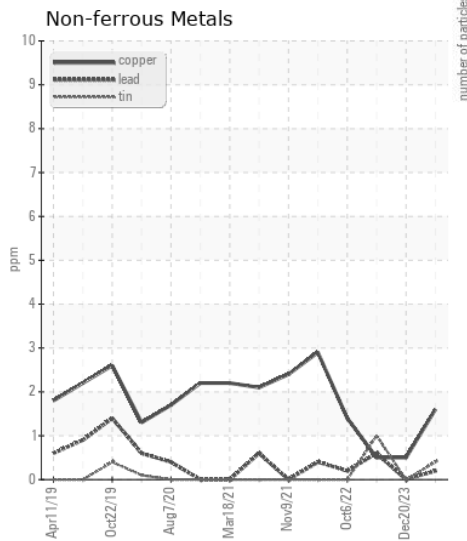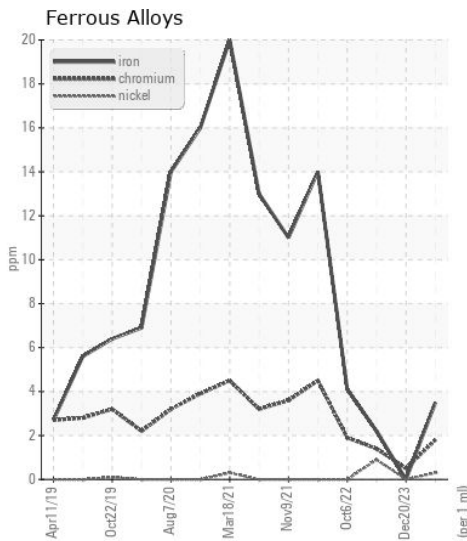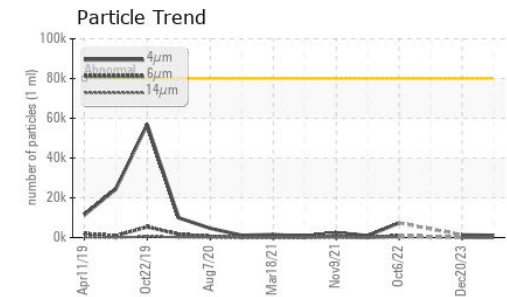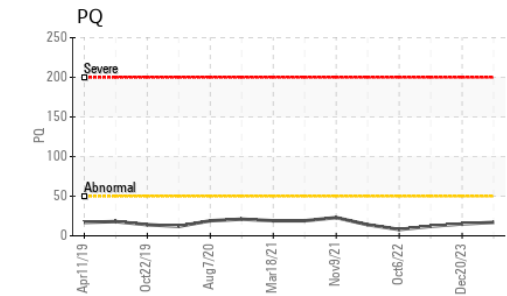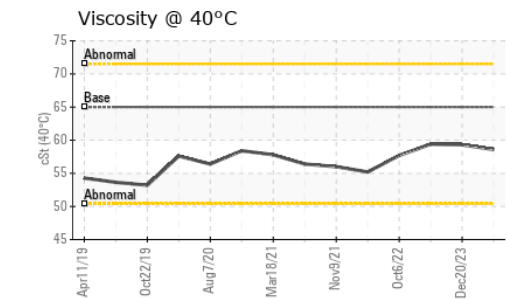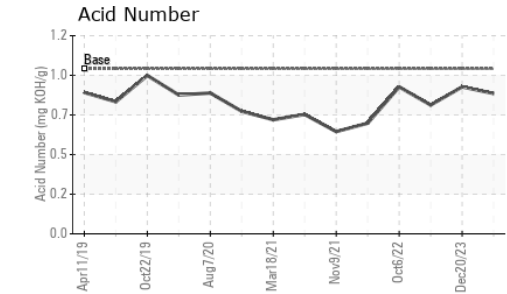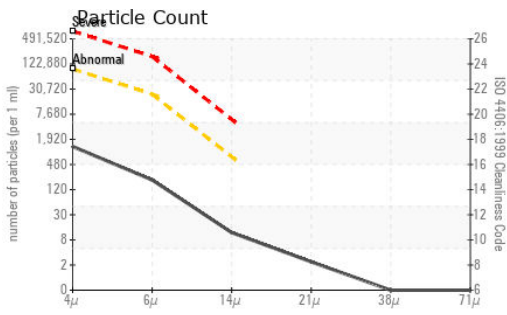

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0207866 **Received** : 23 Apr 2024
Lab Number : 06158420 **Tested** : 24 Apr 2024
Unique Number : 10993843 **Diagnosed** : 24 Apr 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

TENNOCA CONSTRUCTION

PO BOX 2379
 CANDLER, NC
 US 28715
 Contact: MARK ROSS
 mark@tennoca.com
 T: (828)665-8331
 F: