



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL



Machine Id
CATERPILLAR 002377
Component
Hydraulic System
Fluid
{not provided} (--- GAL)

RECOMMENDATION

The filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0856285	WC0800527	WC0724622
Sample Date		Client Info		17 Apr 2024	29 Nov 2023	09 Aug 2023
Machine Age	hrs	Client Info		4872	4360	3777
Oil Age	hrs	Client Info		1000	583	1500
Filter Age	hrs	Client Info		512	583	633
Oil Changed		Client Info		Not Changed	Not Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	SEVERE	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	15	16	13
Chromium	ppm	ASTM D5185m	>10	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	<1	0	0
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	2	2	2
Lead	ppm	ASTM D5185m	>10	<1	<1	<1
Copper	ppm	ASTM D5185m	>75	4	4	3
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Silicon	ppm	ASTM D5185m	>20	5	5	4
Potassium	ppm	ASTM D5185m	>20	2	2	2
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>5000	▲ 21473	▲ 82164	▲ 34104
Particles >6µm		ASTM D7647	>1300	▲ 6855	▲ 31142	▲ 7828
Particles >14µm		ASTM D7647	>160	▲ 334	▲ 1994	▲ 467
Particles >21µm		ASTM D7647	>40	51	▲ 441	▲ 104
Particles >38µm		ASTM D7647	>10	0	14	1
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	▲ 22/20/16	▲ 24/22/18	▲ 22/20/16
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

Sodium	ppm	ASTM D5185m		<1	0	0
Boron	ppm	ASTM D5185m		2	3	2
Barium	ppm	ASTM D5185m		0	0	2
Molybdenum	ppm	ASTM D5185m		3	3	3
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m		33	33	31
Calcium	ppm	ASTM D5185m		553	634	596
Phosphorus	ppm	ASTM D5185m		773	834	758
Zinc	ppm	ASTM D5185m		938	1044	1005
Sulfur	ppm	ASTM D5185m		2568	2870	2734
Acid Number (AN)	mg KOH/g	ASTM D8045		0.84	0.65	0.73
Visc @ 40°C	cSt	ASTM D445		45.8	45.8	45.7

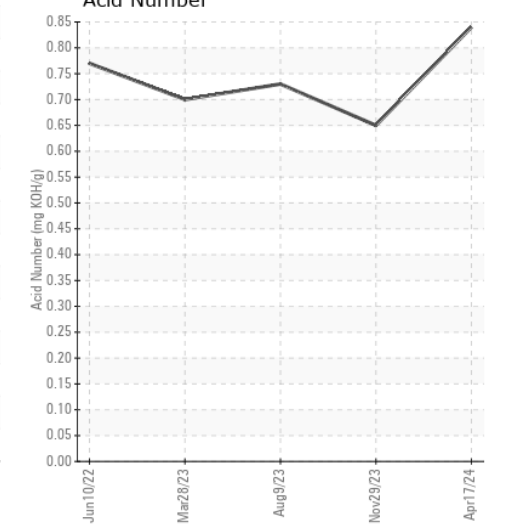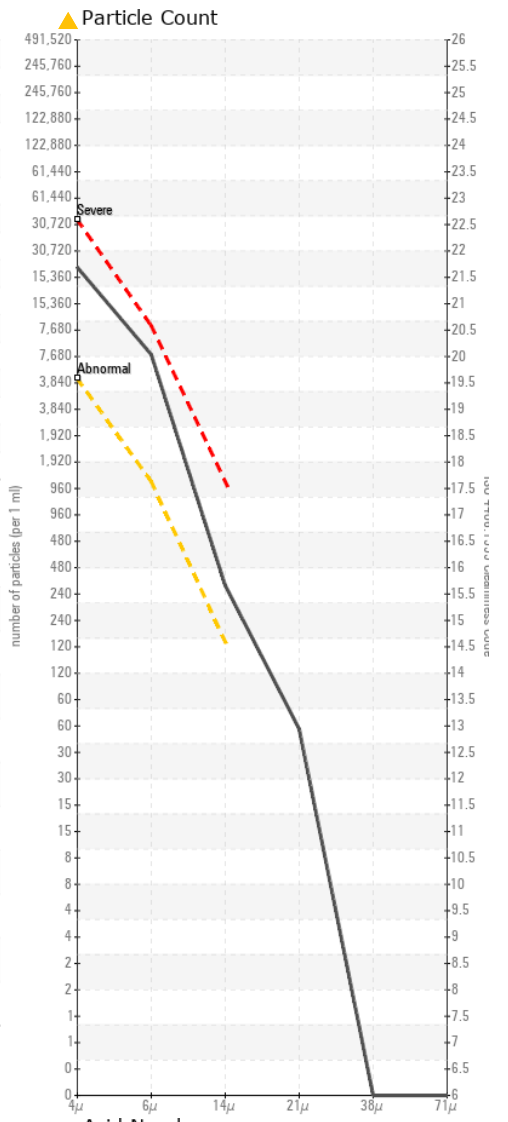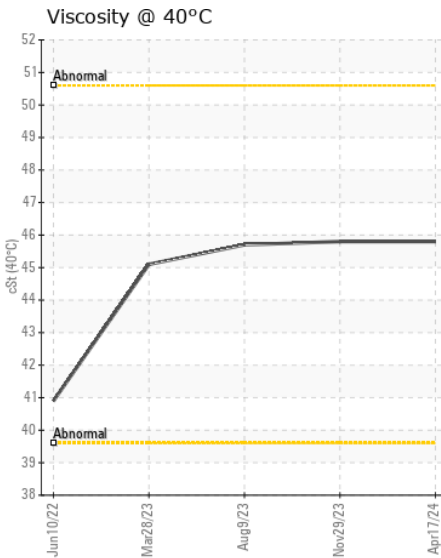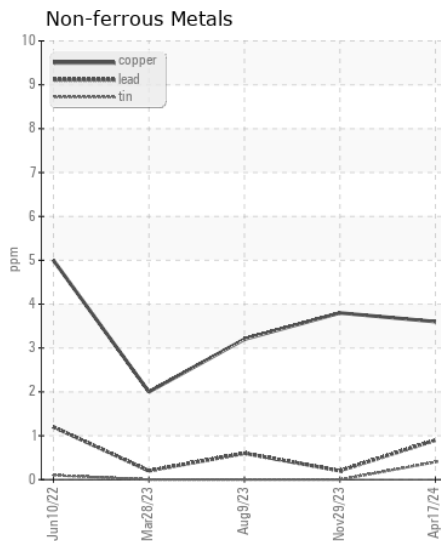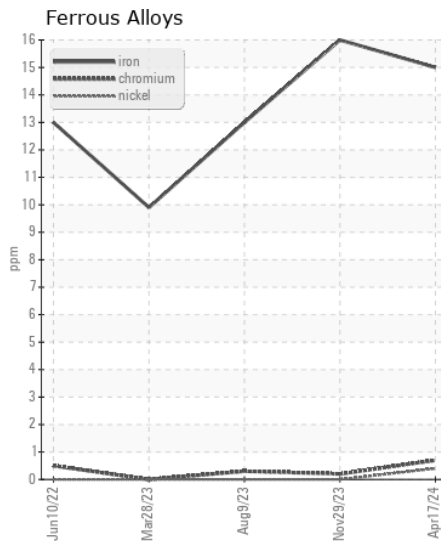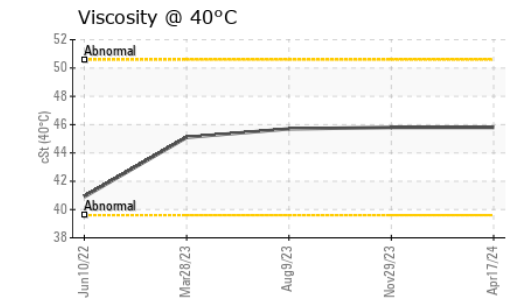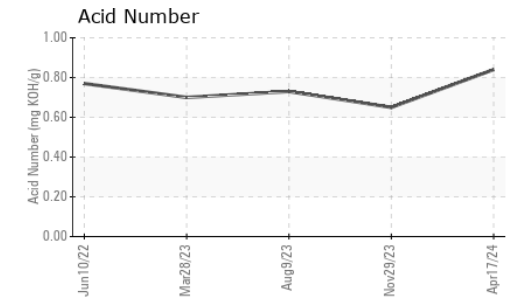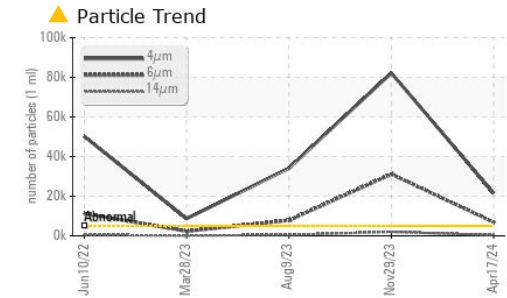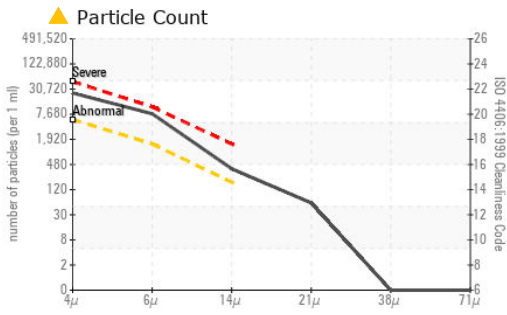

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0856285
Lab Number : 06158430
Unique Number : 10993853
Test Package : CONST
Received : 23 Apr 2024
Tested : 24 Apr 2024
Diagnosed : 24 Apr 2024 - Wes Davis

CJ MILLER LLC
 2903 DEDE RD
 FINKSBURG, MD
 US 21048
 Contact: JOE ROSS
 jross@cjmillerllc.com
 T: (410)239-8006
 F: (410)239-1051

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)