



TRAAP

Texas Refinery Advanced Analysis Program

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
LIEBHERR 652
 Component
Diesel Engine
 Fluid
TRC MOLY XL PRO-SPEC IV 15W40 (11 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR06158497	TR06158493	TR05916258
Sample Date		Client Info		11 Mar 2024	09 Aug 2023	05 Apr 2023
Machine Age	hrs	Client Info		1511	1511	878
Oil Age	hrs	Client Info		250	250	250
Filter Age	hrs	Client Info		250	250	250
Oil Changed		Client Info		Not Chngd	Not Chngd	Not Chngd
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	---	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	6	10	5
Chromium	ppm	ASTM D5185m	>5	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	<1	<1	0
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	<1
Aluminum	ppm	ASTM D5185m	>15	3	3	1
Lead	ppm	ASTM D5185m	>30	<1	<1	2
Copper	ppm	ASTM D5185m	>125	62	▲ 313	30
Tin	ppm	ASTM D5185m	>5	<1	1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>60	7	8	6
Potassium	ppm	ASTM D5185m	>20	3	3	2
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	8.2	9.2	8.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.4	20.5	19.7
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	2	2
Boron	ppm	ASTM D5185m		0	10	13
Barium	ppm	ASTM D5185m		<1	3	2
Molybdenum	ppm	ASTM D5185m		136	114	105
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		26	122	137
Calcium	ppm	ASTM D5185m	1300	4093	3816	3734
Phosphorus	ppm	ASTM D5185m		924	938	836
Zinc	ppm	ASTM D5185m	1300	1030	1031	997
Sulfur	ppm	ASTM D5185m		4476	4281	4503
Oxidation	Abs/.1mm	*ASTM D7414	>25	9.8	14.8	14.9
Base Number (BN)	mg KOH/g	ASTM D2896	14	16.12	14.44	15.33
Visc @ 100°C	cSt	ASTM D445	15.5	14.3	13.8	13.9

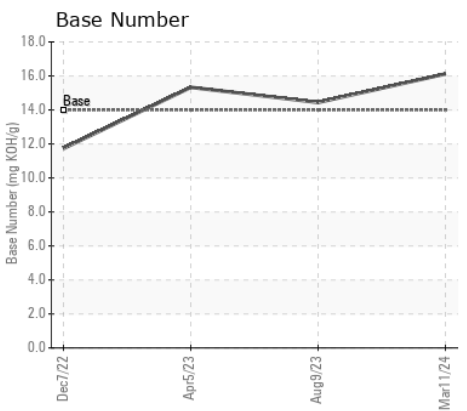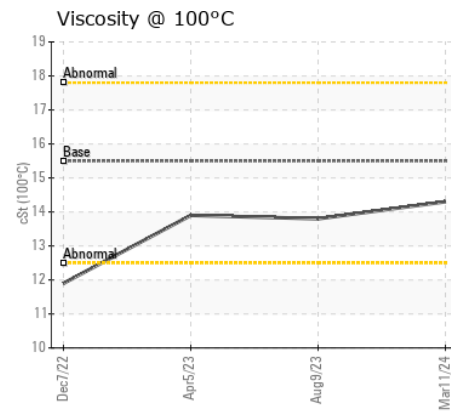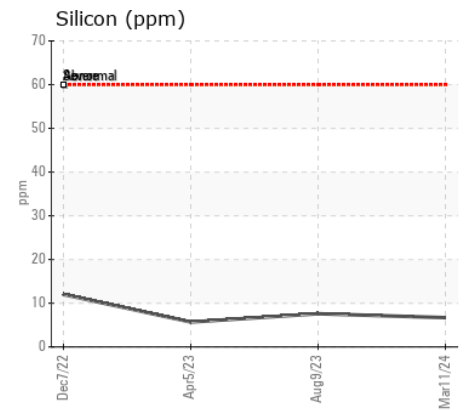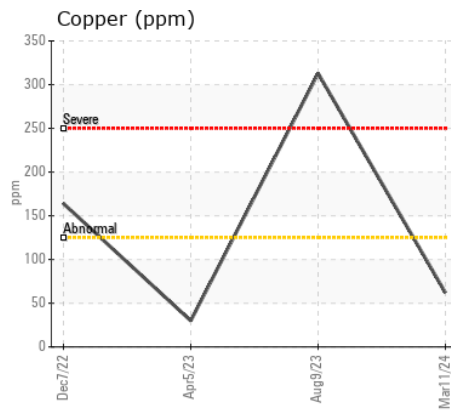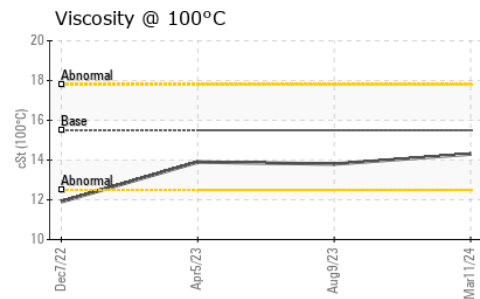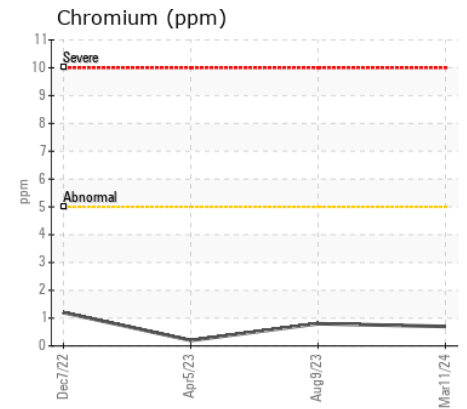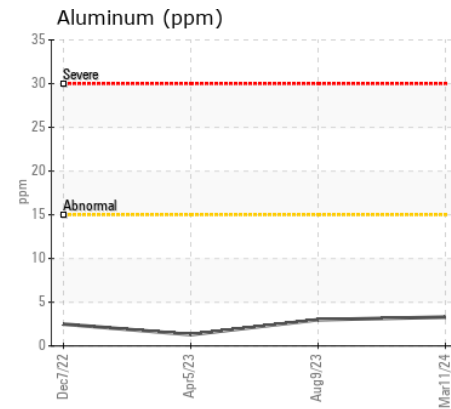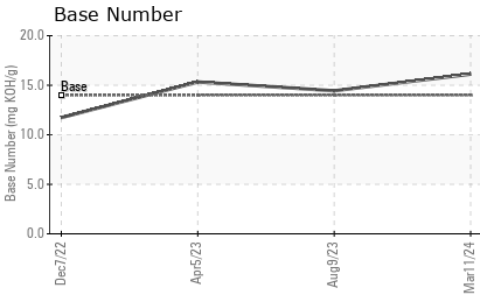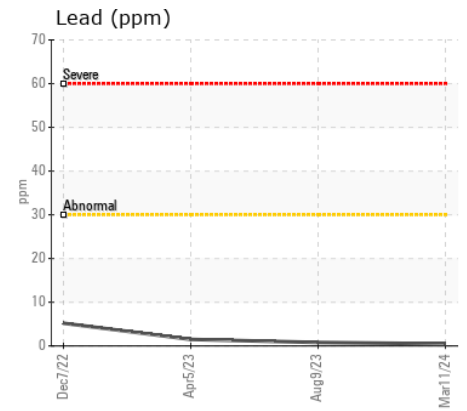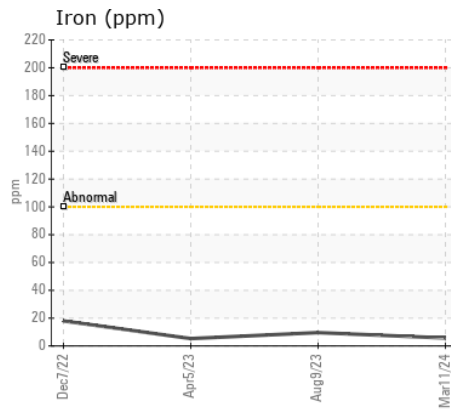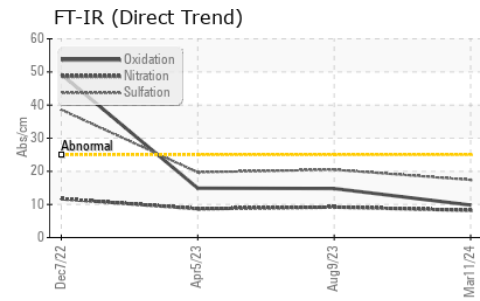

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TR06158497
Lab Number : 06158497
Unique Number : 10993920
Test Package : MOB 2

Received : 23 Apr 2024
Tested : 24 Apr 2024
Diagnosed : 24 Apr 2024 - Wes Davis

DIGGING & RIGGING II
 10 CHRISTINA COURT
 SPARROWS POINT, MD
 US 21219
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-827-0711.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: