



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 50G 1FF050GXKKH290441

Component
Left Final Drive

Fluid
JOHN DEERE GL-5 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0207869	JR0185255	JR0168451
Sample Date		Client Info		15 Apr 2024	29 Sep 2023	24 Apr 2023
Machine Age	hrs	Client Info		3236	2722	2196
Oil Age	hrs	Client Info		1040	526	1110
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Chngd	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	249	104	164
Iron	ppm	ASTM D5185m	>750	479	256	305
Chromium	ppm	ASTM D5185m	>9	10	5	6
Nickel	ppm	ASTM D5185m	>10	7	3	4
Titanium	ppm	ASTM D5185m		2	<1	1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>40	23	9	18
Lead	ppm	ASTM D5185m	>15	<1	0	0
Copper	ppm	ASTM D5185m	>40	1	<1	<1
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	70	21	36
Potassium	ppm	ASTM D5185m	>20	6	1	2
Water		WC Method	>0.075	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	2	<1	2
Boron	ppm	ASTM D5185m		8	3	8
Barium	ppm	ASTM D5185m		1	<1	0
Molybdenum	ppm	ASTM D5185m		<1	0	<1
Manganese	ppm	ASTM D5185m		7	4	6
Magnesium	ppm	ASTM D5185m		6	6	8
Calcium	ppm	ASTM D5185m		70	29	54
Phosphorus	ppm	ASTM D5185m		444	397	337
Zinc	ppm	ASTM D5185m		65	51	123
Sulfur	ppm	ASTM D5185m		16225	16444	18833
Visc @ 40°C	cSt	ASTM D445		132	134	149

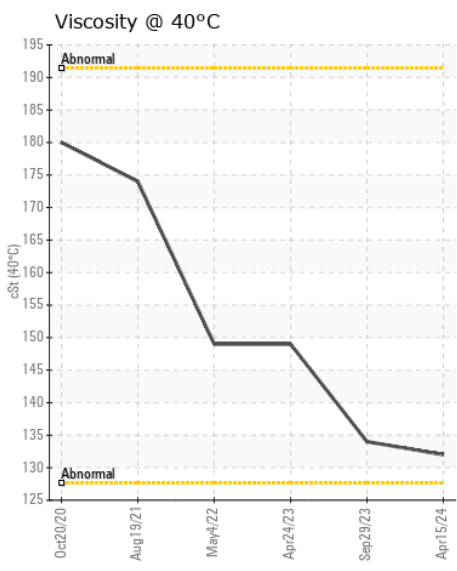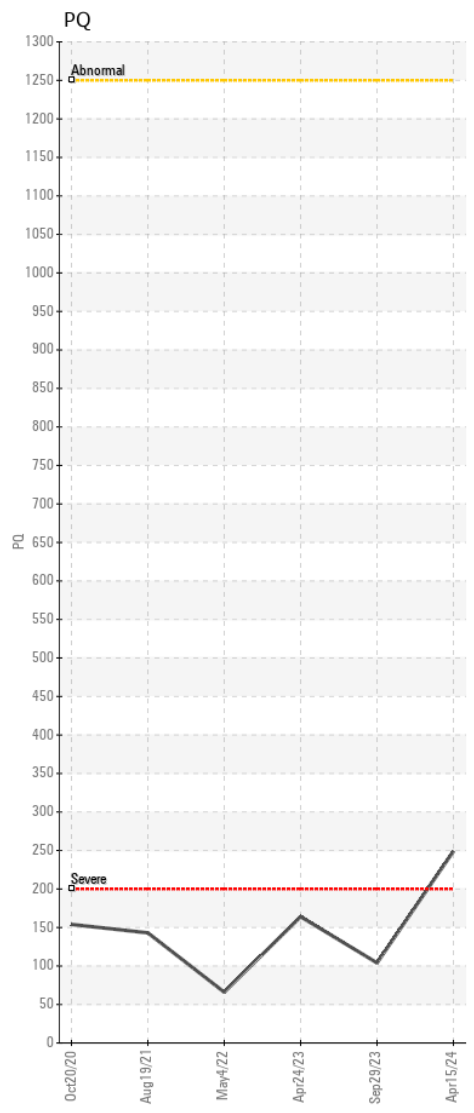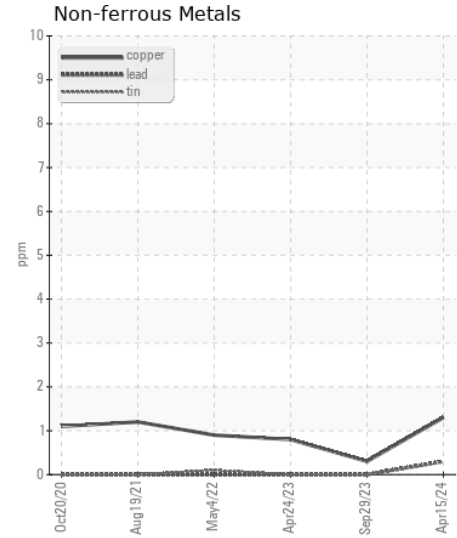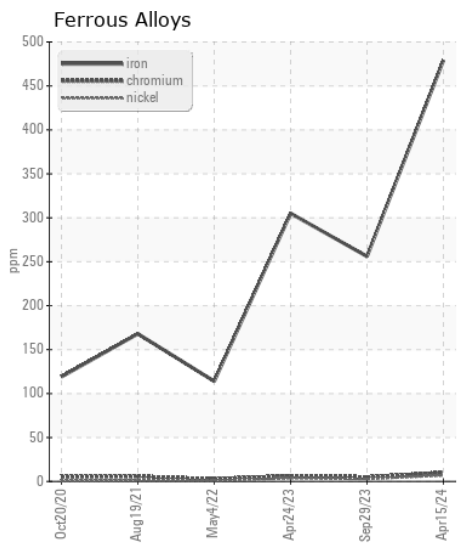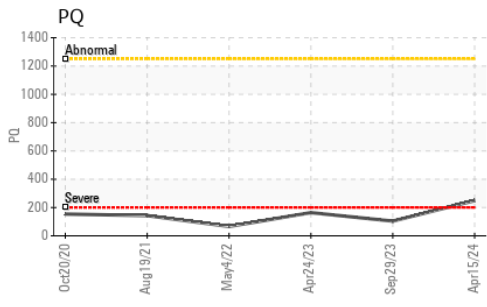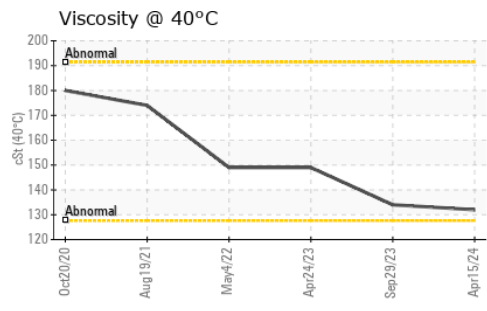

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0207869 **Received** : 23 Apr 2024
Lab Number : 06158533 **Tested** : 25 Apr 2024
Unique Number : 10993956 **Diagnosed** : 25 Apr 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

TENNOCA CONSTRUCTION
 PO BOX 2379
 CANDLER, NC
 US 28715
 Contact: MARK ROSS
 mark@tennoca.com
 T: (828)665-8331
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)