



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**DT760**  
Component  
**Front Differential**  
Fluid  
**CHEVRON DELO SYNTHETIC GEAR 75W90 (--- QTS)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PCA0091259</b>	PCA0103250	PCA0091251
Sample Date		Client Info		<b>17 Apr 2024</b>	15 Sep 2023	28 Mar 2023
Machine Age	mls	Client Info		<b>179366</b>	152645	127511
Oil Age	mls	Client Info		<b>179366</b>	76300	0
Filter Age	mls	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changed</b>	Changed	Not Changed
Filter Changed		Client Info		<b>Not Changed</b>	Not Changed	Not Changed
Sample Status				<b>NORMAL</b>	NORMAL	ABNORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>1200	<b>110</b>	165	147
Chromium	ppm	ASTM D5185m	>8	<b>1</b>	1	<1
Nickel	ppm	ASTM D5185m	>20	<b>5</b>	6	7
Titanium	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>2</b>	6	2
Lead	ppm	ASTM D5185m	>25	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>50	<b>&lt;1</b>	<1	0
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>230	<b>53</b>	118	97
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	<1
Water		WC Method	>.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>1</b>	3	0
Boron	ppm	ASTM D5185m		<b>246</b>	206	211
Barium	ppm	ASTM D5185m		<b>1</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>22</b>	14	12
Manganese	ppm	ASTM D5185m		<b>1</b>	2	2
Magnesium	ppm	ASTM D5185m		<b>161</b>	122	107
Calcium	ppm	ASTM D5185m		<b>310</b>	176	172
Phosphorus	ppm	ASTM D5185m		<b>1260</b>	1384	1348
Zinc	ppm	ASTM D5185m		<b>268</b>	171	156
Sulfur	ppm	ASTM D5185m		<b>20277</b>	26196	25056
Visc @ 40°C	cSt	ASTM D445	106	<b>75.4</b>	80.2	86.0

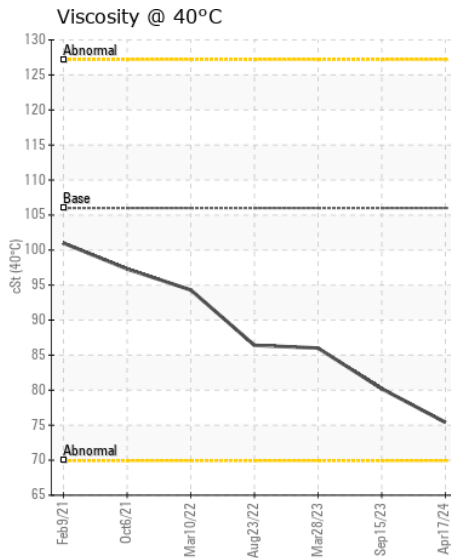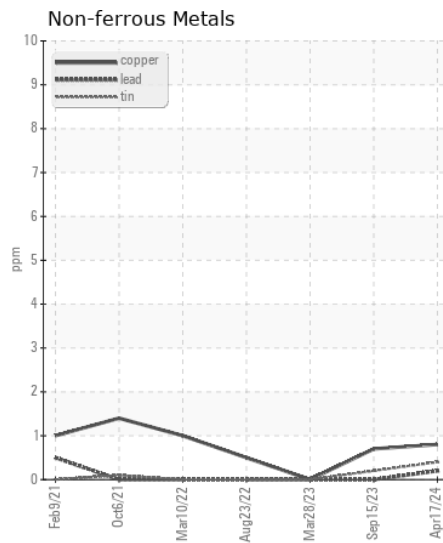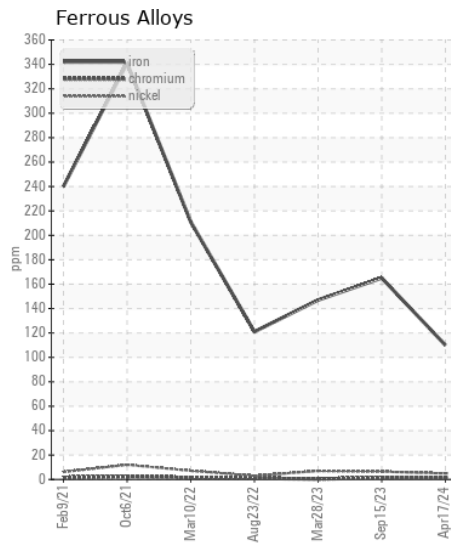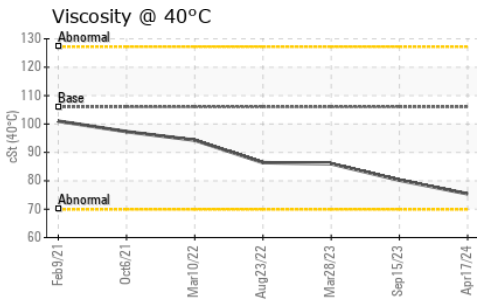

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0091259  
**Lab Number** : 06158585  
**Unique Number** : 10994008  
**Test Package** : FLEET

**Received** : 23 Apr 2024  
**Tested** : 25 Apr 2024  
**Diagnosed** : 25 Apr 2024 - Wes Davis

**NW WHITE & CO - ANDERSON DIVISION**  
 2605 RIVER RD  
 PIEDMONT, SC  
 US 29673

Contact: James Threatt  
 jthreatt@nwwhite.com

T: (864)918-4646

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: