



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
CAPT RICKIE JOHNSON (S/N 74H1-1052)
Component
Starboard Main Engine
Fluid
CHEVRON DELO 710 LE (250 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MWM731180	MWM727713	MWM727683
Sample Date		Client Info		20 Mar 2024	03 Jan 2024	26 Nov 2023
Machine Age	hrs	Client Info		44932	43098	42176
Oil Age	hrs	Client Info		28930	24084	22974
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Chngd	Not Chngd	Not Chngd
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	21	21	21
Chromium	ppm	ASTM D5185m	>8	<1	<1	1
Nickel	ppm	ASTM D5185m	>2	0	0	<1
Titanium	ppm	ASTM D5185m	>3	0	0	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>15	<1	2	2
Lead	ppm	ASTM D5185m	>18	1	0	2
Copper	ppm	ASTM D5185m	>80	9	13	12
Tin	ppm	ASTM D5185m	>14	<1	<1	2
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	3	4	4
Potassium	ppm	ASTM D5185m	>20	106	4	99
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	1.7	1.2	1.6
Nitration	Abs/cm	*ASTM D7624	>20	8.3	7.4	8.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.7	16.3	17.5
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	18	<1	11
Boron	ppm	ASTM D5185m		30	46	31
Barium	ppm	ASTM D5185m		0	0	8
Molybdenum	ppm	ASTM D5185m		52	45	48
Manganese	ppm	ASTM D5185m		0	0	<1
Magnesium	ppm	ASTM D5185m		12	9	12
Calcium	ppm	ASTM D5185m		3641	3431	3433
Phosphorus	ppm	ASTM D5185m		14	47	13
Zinc	ppm	ASTM D5185m	10	7	0	0
Sulfur	ppm	ASTM D5185m		3213	2347	2648
Oxidation	Abs/.1mm	*ASTM D7414	>25	7.6	6.7	8.1
Base Number (BN)	mg KOH/g	ASTM D2896	9.2	8.1	6.2	7.9
Visc @ 100°C	cSt	ASTM D445	15.5	14.9	14.8	15.0


FT-IR (Direct Trend)

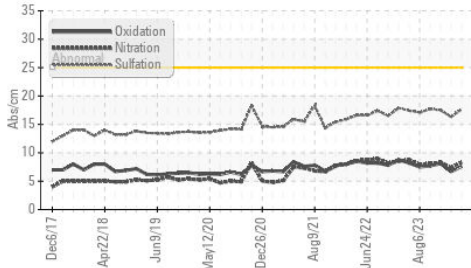


Base Number

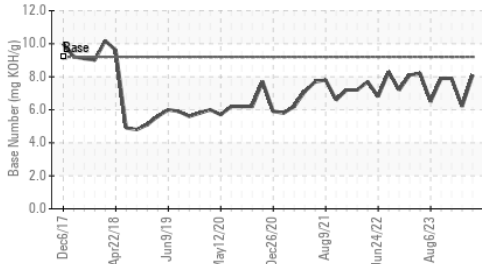


Viscosity @ 100°C

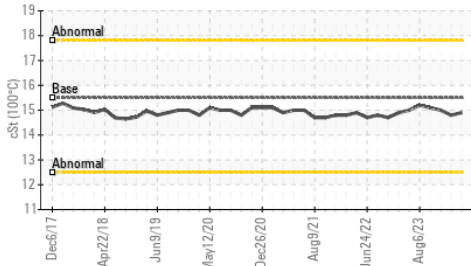


Ferrous Alloys

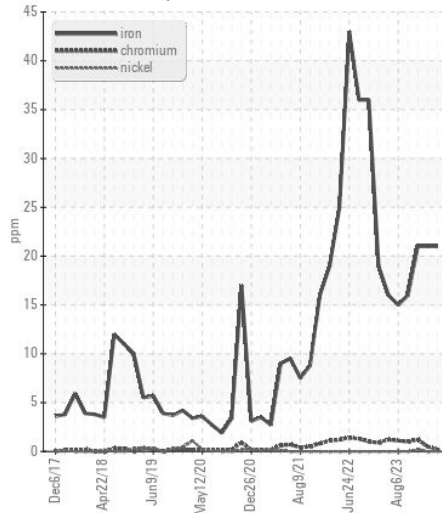


Non-ferrous Metals

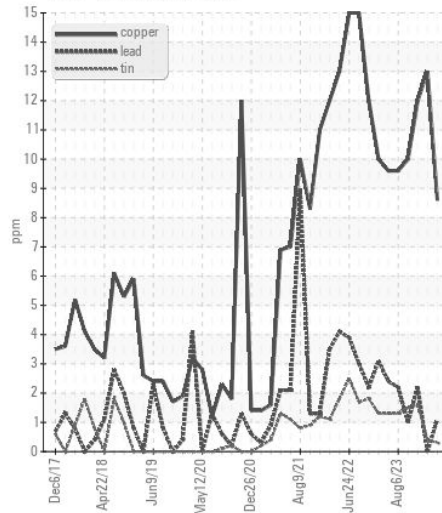

Viscosity @ 100°C

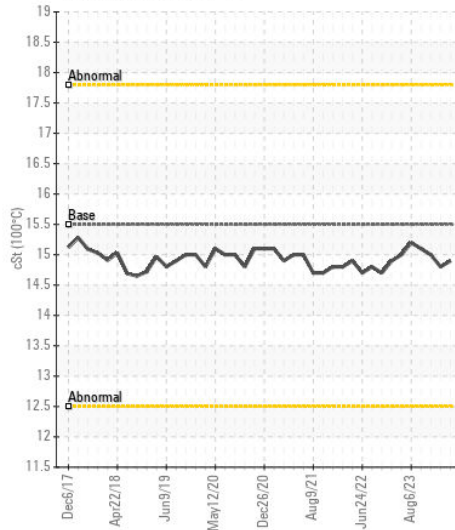

Base Number

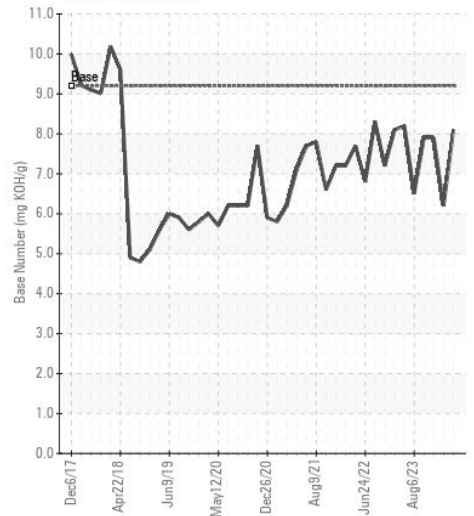

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : MWM731180

Lab Number : 06158708

Unique Number : 10994131

Test Package : MAR 2

Received : 24 Apr 2024

Tested : 25 Apr 2024

Diagnosed : 25 Apr 2024 - Angela Borella

AMERICAN COMMERCIAL LINES

PO BOX 610, 1701 E. MARKET STREET

JEFFERSONVILLE, IN

US 47130

Contact: RONALD SCHNEIDER

ronald.schneider@bargaeacbl.com

T:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (812)288-1644