



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
26629
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0114786	PCA0118438	PCA0076960
Sample Date		Client Info		18 Apr 2024	30 Jan 2024	12 May 2023
Machine Age	mls	Client Info		0	0	382475
Oil Age	mls	Client Info		0	0	60000
Filter Age	mls	Client Info		0	0	60000
Oil Changed		Client Info		N/A	N/A	Changed
Filter Changed		Client Info		N/A	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	98	60	80
Chromium	ppm	ASTM D5185m	>20	<1	1	2
Nickel	ppm	ASTM D5185m	>4	0	1	1
Titanium	ppm	ASTM D5185m		3	2	6
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	3	2	3
Lead	ppm	ASTM D5185m	>40	3	4	7
Copper	ppm	ASTM D5185m	>330	8	8	12
Tin	ppm	ASTM D5185m	>15	<1	2	2
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	7	7	7
Potassium	ppm	ASTM D5185m	>20	4	4	4
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	1.3	1	1.4
Nitration	Abs/cm	*ASTM D7624	>20	12.6	10.9	13.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	26.6	24.3	27.9
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		21	11	28
Boron	ppm	ASTM D5185m	2	0	0	<1
Barium	ppm	ASTM D5185m	0	0	13	0
Molybdenum	ppm	ASTM D5185m	50	59	60	56
Manganese	ppm	ASTM D5185m	0	<1	1	1
Magnesium	ppm	ASTM D5185m	950	935	871	927
Calcium	ppm	ASTM D5185m	1050	1265	1053	1179
Phosphorus	ppm	ASTM D5185m	995	1044	957	981
Zinc	ppm	ASTM D5185m	1180	1319	1171	1276
Sulfur	ppm	ASTM D5185m	2600	3069	2729	3055
Oxidation	Abs/.1mm	*ASTM D7414	>25	24.0	20.7	24.5
Base Number (BN)	mg KOH/g	ASTM D2896		3.7	3.9	4.0
Visc @ 100°C	cSt	ASTM D445	12.00	11.0	10.7	10.8


FT-IR (Direct Trend)

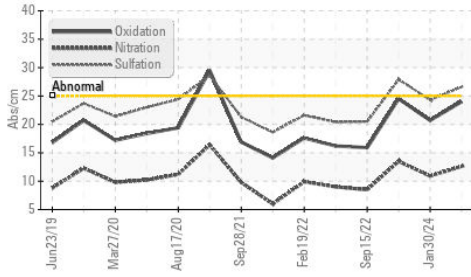


Base Number

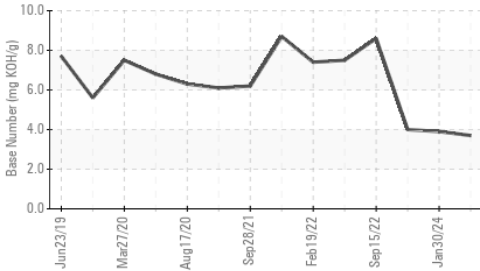


Viscosity @ 100°C

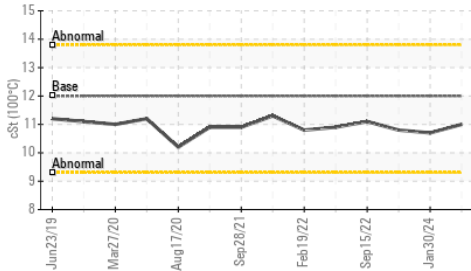


Ferrous Alloys

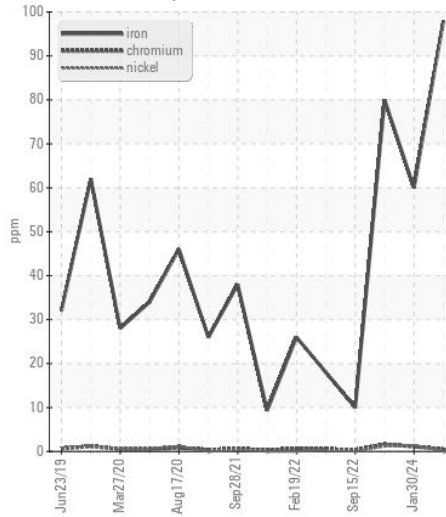


Non-ferrous Metals

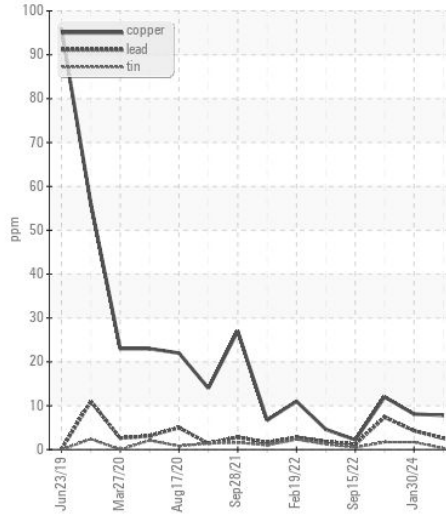

Viscosity @ 100°C

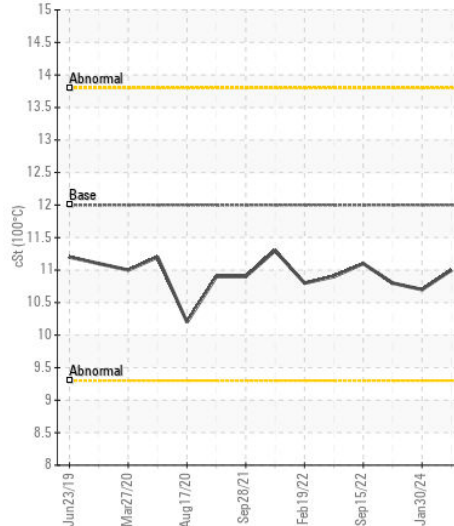

Base Number

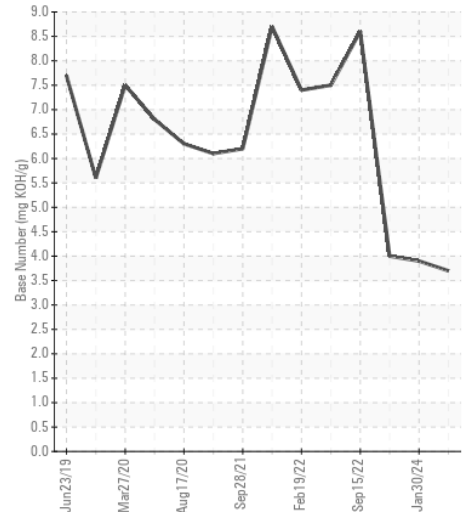

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0114786
Lab Number : 06158754
Unique Number : 10994177
Test Package : FLEET
Received : 24 Apr 2024
Tested : 25 Apr 2024
Diagnosed : 25 Apr 2024 - Wes Davis

PERDUE FARMS - SALISBURY
 7036 ZION CHURCH ROAD
 SALISBURY, MD
 US 21802
 Contact: RICHARD O'NEAL
 richard.oneal@perdue.com
 T: (410)543-3628
 F: (410)341-2164

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)