



| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Machine Id
361M
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | GFL0117613 | GFL0108725 | GFL0101513 |
| Sample Date | | Client Info | | 22 Apr 2024 | 10 Jan 2024 | 01 Dec 2023 |
| Machine Age | hrs | Client Info | | 18535 | 17898 | 17622 |
| Oil Age | hrs | Client Info | | 17898 | 17622 | 15559 |
| Filter Age | hrs | Client Info | | 0 | 17622 | 0 |
| Oil Changed | | Client Info | | Not Changd | Changed | Changed |
| Filter Changed | | Client Info | | Not Changd | Changed | Changed |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|------|
| Iron | ppm | ASTM D5185m | >100 | 14 | 48 | 22 |
| Chromium | ppm | ASTM D5185m | >20 | <1 | 1 | <1 |
| Nickel | ppm | ASTM D5185m | >4 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m | >3 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >20 | 4 | 2 | 1 |
| Lead | ppm | ASTM D5185m | >40 | 0 | <1 | 0 |
| Copper | ppm | ASTM D5185m | >330 | 1 | <1 | 1 |
| Tin | ppm | ASTM D5185m | >15 | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185m | | 0 | 0 | 0 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION








There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon | ppm | ASTM D5185m | >25 | 4 | 5 | 3 |
| Potassium | ppm | ASTM D5185m | >20 | 0 | 0 | 0 |
| Fuel | | WC Method | >5 | <1.0 | <1.0 | <1.0 |
| Water | | WC Method | >0.2 | NEG | NEG | NEG |
| Glycol | | WC Method | | NEG | NEG | NEG |
| Soot % | % | *ASTM D7844 | >3 | 0.6 | 1 | 0.6 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 9.1 | 10.4 | 8.5 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 20.6 | 23.6 | 21.1 |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG | NEG |

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|--------------|------|------|
| Sodium | ppm | ASTM D5185m | | 2 | 7 | 5 |
| Boron | ppm | ASTM D5185m | 0 | <1 | 1 | 1 |
| Barium | ppm | ASTM D5185m | 0 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | 60 | 61 | 72 | 62 |
| Manganese | ppm | ASTM D5185m | 0 | <1 | 0 | 0 |
| Magnesium | ppm | ASTM D5185m | 1010 | 982 | 1206 | 1065 |
| Calcium | ppm | ASTM D5185m | 1070 | 1081 | 1389 | 1219 |
| Phosphorus | ppm | ASTM D5185m | 1150 | 1081 | 1208 | 884 |
| Zinc | ppm | ASTM D5185m | 1270 | 1293 | 1560 | 1320 |
| Sulfur | ppm | ASTM D5185m | 2060 | 3404 | 3123 | 2764 |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 17.1 | 20.9 | 16.8 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 9.8 | 7.8 | 7.9 | 8.6 |
| Visc @ 100°C | cSt | ASTM D445 | 15.4 | 13.8 | 14.7 | 14.3 |

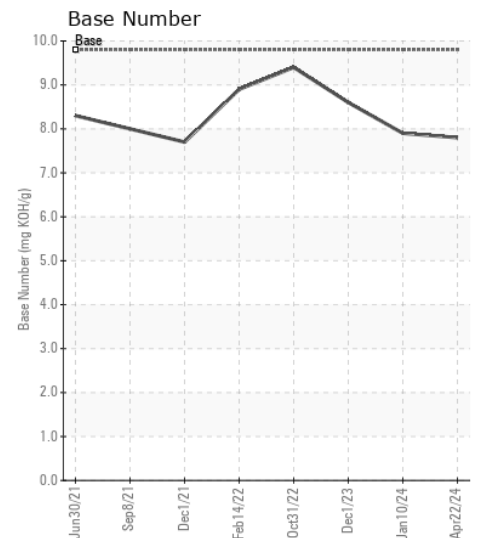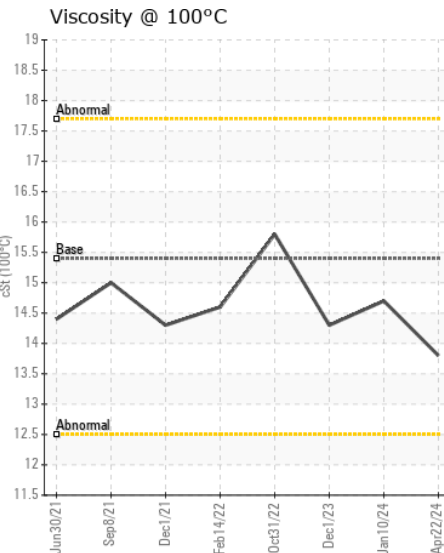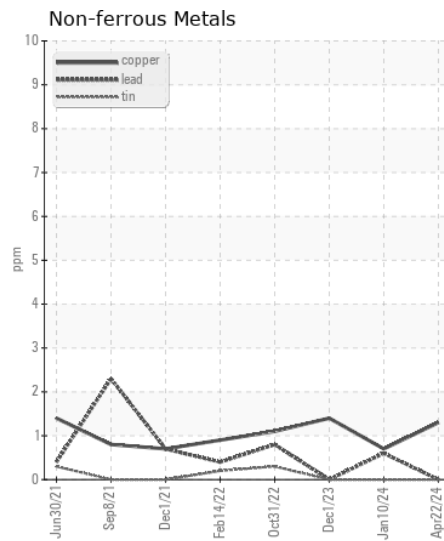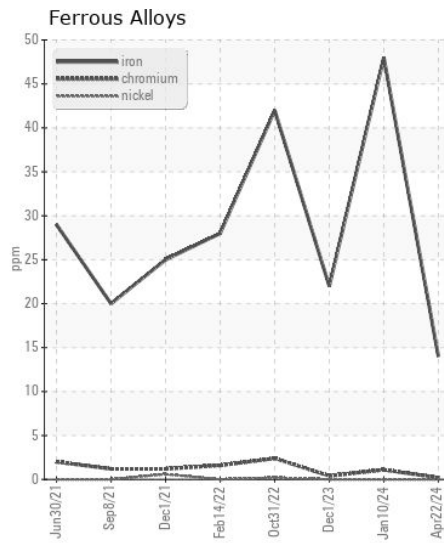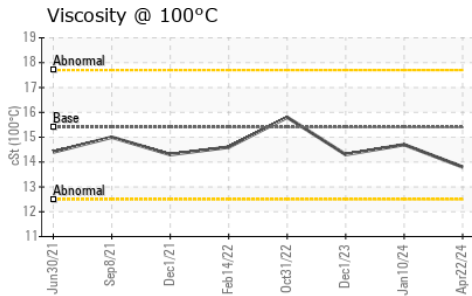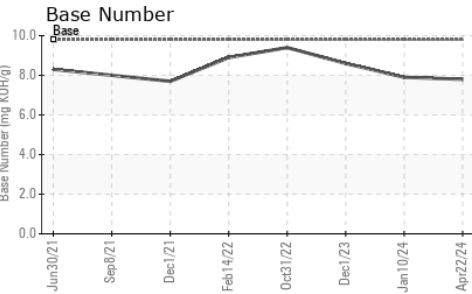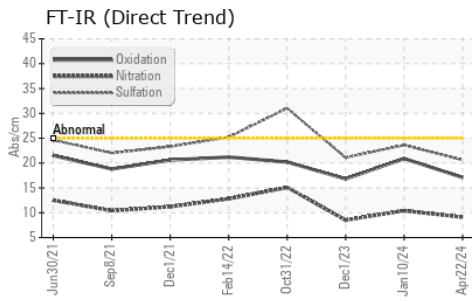

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0117613
Lab Number : 06158809
Unique Number : 10994232
Test Package : FLEET

Received : 24 Apr 2024
Tested : 25 Apr 2024
Diagnosed : 25 Apr 2024 - Wes Davis

GFL Environmental - 415 - Michigan East
 6200 Elmridge
 Sterling Heights, MI
 US 48313
 Contact: Frank Wolak
 fwolak@gflenv.com
 T: (586)825-9514
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)