



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**912018**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0117619</b>	GFL0108841	GFL0105659
Sample Date		Client Info		<b>22 Apr 2024</b>	17 Jan 2024	16 Dec 2023
Machine Age	hrs	Client Info		<b>6186</b>	5460	0
Oil Age	hrs	Client Info		<b>184</b>	1394	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Chngd</b>	Changed	Changed
Filter Changed		Client Info		<b>Not Chngd</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	ABNORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>120	<b>17</b>	33	54
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	2
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	<1	▲ 7
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	2	● 12
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>330	<b>3</b>	6	● 204
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	4
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	<b>4</b>	7	▲ 69
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	33
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	<1.0	0.4
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>4	<b>1.2</b>	1.8	0.7
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.9</b>	10.7	11.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.8</b>	24.3	24.6
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>7</b>	6	4
Boron	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	89
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185m	60	<b>63</b>	59	104
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	1	4
Magnesium	ppm	ASTM D5185m	1010	<b>999</b>	909	741
Calcium	ppm	ASTM D5185m	1070	<b>1114</b>	1001	1323
Phosphorus	ppm	ASTM D5185m	1150	<b>1023</b>	985	720
Zinc	ppm	ASTM D5185m	1270	<b>1299</b>	1189	881
Sulfur	ppm	ASTM D5185m	2060	<b>2936</b>	2148	2059
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>17.8</b>	21.1	23.9
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>7.0</b>	5.0	6.4
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.1</b>	14.3	● 10.5


**FT-IR (Direct Trend)**

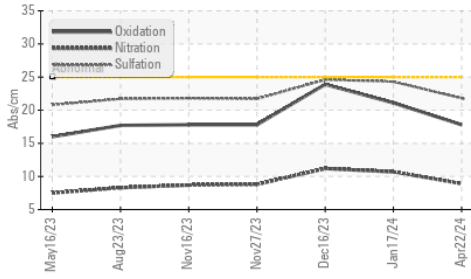


**Ferrous Alloys**

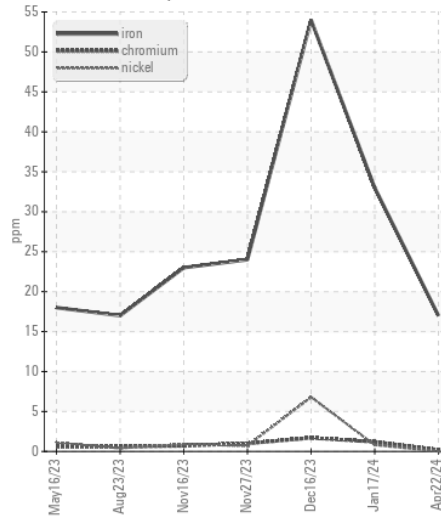


**Base Number**

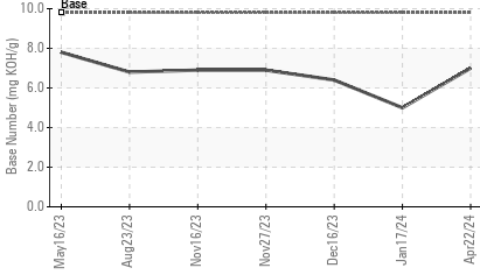


**Non-ferrous Metals**

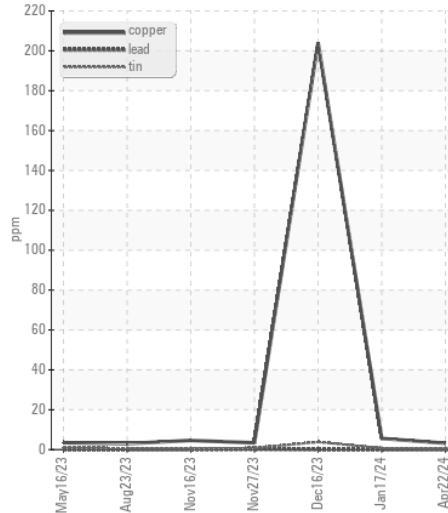


**Viscosity @ 100°C**

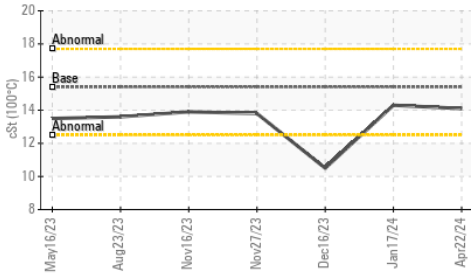

**Viscosity @ 100°C**

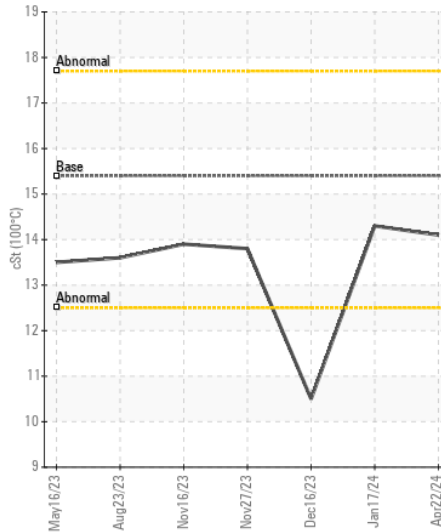

**Base Number**

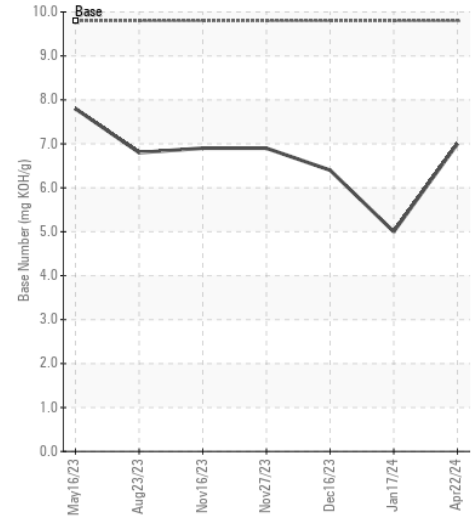

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0117619  
**Lab Number** : 06158814  
**Unique Number** : 10994237  
**Test Package** : FLEET

**Received** : 24 Apr 2024  
**Tested** : 25 Apr 2024  
**Diagnosed** : 25 Apr 2024 - Wes Davis

**GFL Environmental - 415 - Michigan East**  
 6200 Elmridge  
 Sterling Heights, MI  
 US 48313  
 Contact: Frank Wolak  
 fwolak@gflenv.com  
 T: (586)825-9514  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)