



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Area

Contracting

Machine Id

7207 7207

Component

Diesel Engine

Fluid

DIESEL ENGINE OIL SAE 15W40 (3 GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0918760	WC0784625	WC0770931
Sample Date		Client Info		22 Apr 2024	21 Aug 2023	03 Mar 2023
Machine Age	hrs	Client Info		4285	4021	3675
Oil Age	hrs	Client Info		264	346	423
Filter Age	hrs	Client Info		264	346	423
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	12	21	22
Chromium	ppm	ASTM D5185m	>11	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	0	<1	1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>31	2	2	3
Lead	ppm	ASTM D5185m	>26	0	<1	<1
Copper	ppm	ASTM D5185m	>26	<1	<1	<1
Tin	ppm	ASTM D5185m	>4	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is a high amount of particulates present in the oil.

Silicon	ppm	ASTM D5185m	>22	7	5	6
Potassium	ppm	ASTM D5185m	>20	0	1	<1
Fuel		WC Method	>2.1	<1.0	<1.0	<1.0
Water		WC Method	>0.21	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.3	0.3
Nitration	Abs/cm	*ASTM D7624	>20	6.9	7.5	7.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.5	20.6	21.4
Particles >4µm		ASTM D7647	>20000	▲ 33120	14311	▲ 21793
Particles >6µm		ASTM D7647	>5000	▲ 18042	▲ 7796	▲ 11872
Particles >14µm		ASTM D7647	>640	▲ 3071	▲ 1327	▲ 2020
Particles >21µm		ASTM D7647	>160	▲ 1034	▲ 447	▲ 681
Particles >38µm		ASTM D7647	>40	▲ 160	▲ 69	▲ 105
Particles >71µm		ASTM D7647	>10	▲ 16	7	▲ 11
Oil Cleanliness		ISO 4406 (c)	>21/19/16	▲ 22/21/19	▲ 21/20/18	▲ 22/21/18
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	<1	1	3
Boron	ppm	ASTM D5185m	250	60	58	52
Barium	ppm	ASTM D5185m	10	0	0	2
Molybdenum	ppm	ASTM D5185m	100	48	56	49
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	450	524	508	491
Calcium	ppm	ASTM D5185m	3000	1709	1656	1573
Phosphorus	ppm	ASTM D5185m	1150	782	751	737
Zinc	ppm	ASTM D5185m	1350	916	930	891
Sulfur	ppm	ASTM D5185m	4250	2745	2423	2393
Oxidation	Abs/.1mm	*ASTM D7414	>25	20.1	19.0	19.9
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	9.8	8.7	9.5
Visc @ 100°C	cSt	ASTM D445	14.4	12.6	12.6	12.6

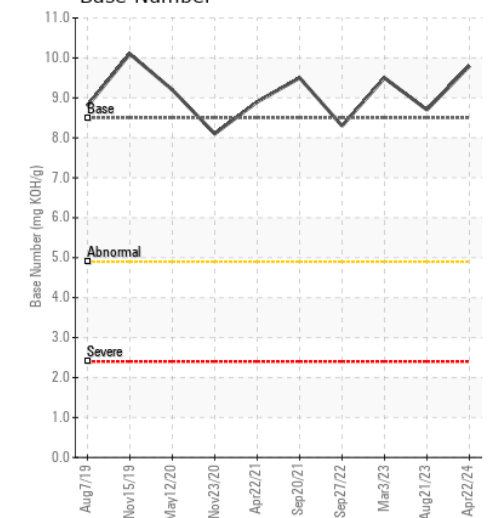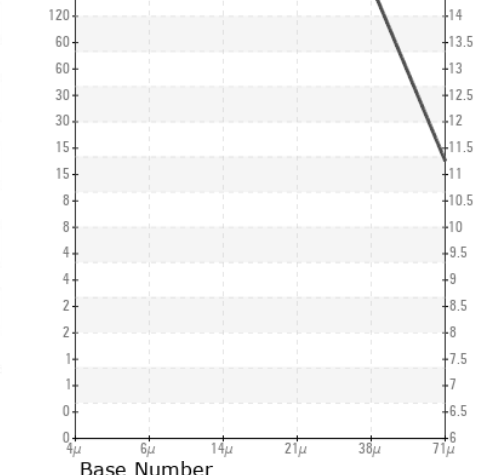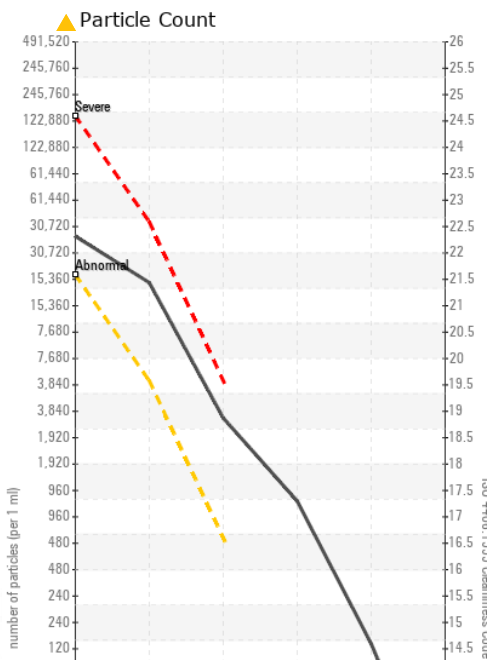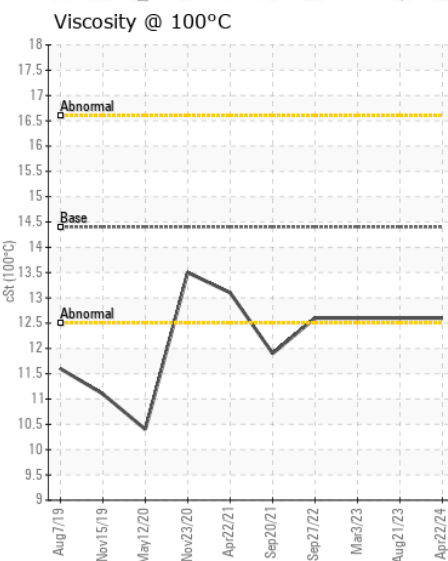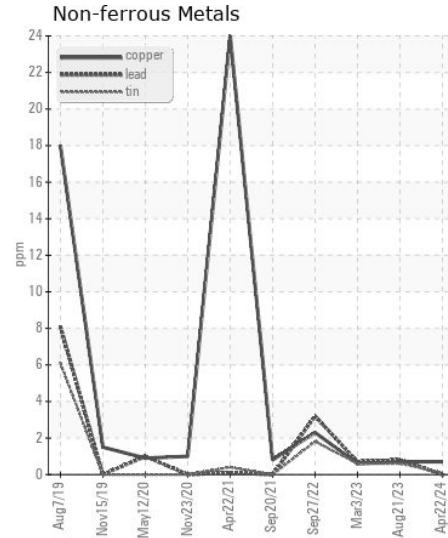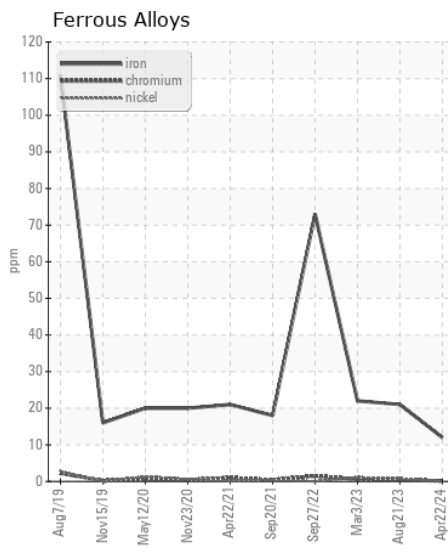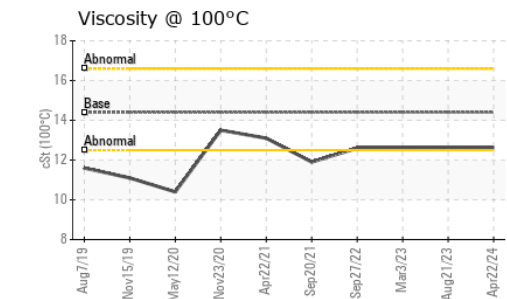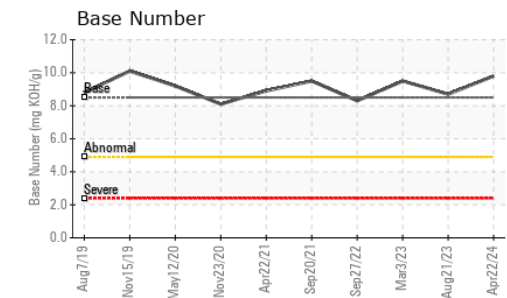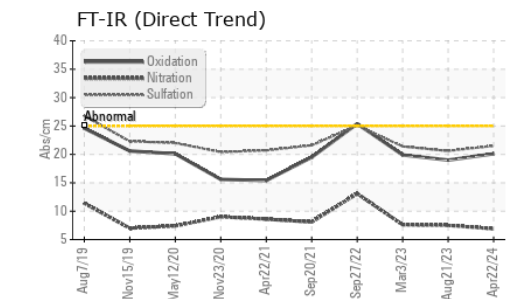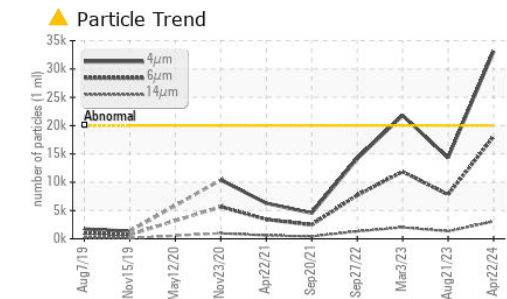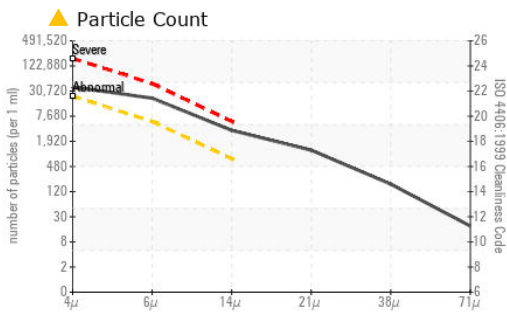

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0918760 **Received** : 24 Apr 2024
Lab Number : 06158949 **Tested** : 25 Apr 2024
Unique Number : 10994372 **Diagnosed** : 25 Apr 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PrtCount, TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CAROLINA SUNROCK

PO BOX 25
 BUTNER, NC
 US 27509

Contact: Leigh Dennis
 rdennis@thesunrockgroup.com

T: (919)575-4505
 F: (919)575-0162