



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>ABNORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area

**Contracting**

Machine Id

**4404 4404**

Component

**Transmission (Auto)**

Fluid

**MOBIL DELVAC SYNTHETIC ATF (5 GAL)**

## RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0918701</b>	WC0867130	WC0808905
Sample Date		Client Info		<b>22 Apr 2024</b>	10 Nov 2023	19 Apr 2023
Machine Age	hrs	Client Info		<b>12713</b>	12243	11248
Oil Age	hrs	Client Info		<b>1465</b>	995	1593
Filter Age	hrs	Client Info		<b>1465</b>	995	1593
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	<b>22</b>	20	24
Chromium	ppm	ASTM D5185m	>5	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>50	<b>8</b>	10	12
Lead	ppm	ASTM D5185m	>50	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>225	<b>2</b>	2	2
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	1	1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	▲ MODER	LIGHT
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION










There is a high amount of particulates present in the fluid.

Silicon	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	2
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Particles >4µm		ASTM D7647	>10000	▲ <b>73806</b>	---	▲ 22500
Particles >6µm		ASTM D7647	>2500	▲ <b>24829</b>	---	▲ 5800
Particles >14µm		ASTM D7647	>320	▲ <b>2344</b>	---	▲ 450
Particles >21µm		ASTM D7647	>80	▲ <b>640</b>	---	▲ 104
Particles >38µm		ASTM D7647	>20	▲ <b>38</b>	---	3
Particles >71µm		ASTM D7647	>4	<b>2</b>	---	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	▲ <b>23/22/18</b>	---	▲ 22/20/16
Silt	scalar	*Visual	NONE	<b>LIGHT</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>4</b>	5	7
Boron	ppm	ASTM D5185m		<b>127</b>	173	149
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	<1	0
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>5</b>	9	14
Calcium	ppm	ASTM D5185m		<b>148</b>	73	64
Phosphorus	ppm	ASTM D5185m		<b>322</b>	394	329
Zinc	ppm	ASTM D5185m		<b>50</b>	15	17
Sulfur	ppm	ASTM D5185m		<b>1474</b>	1456	1215
Visc @ 40°C	cSt	ASTM D445	39	<b>37.5</b>	36.1	36.0

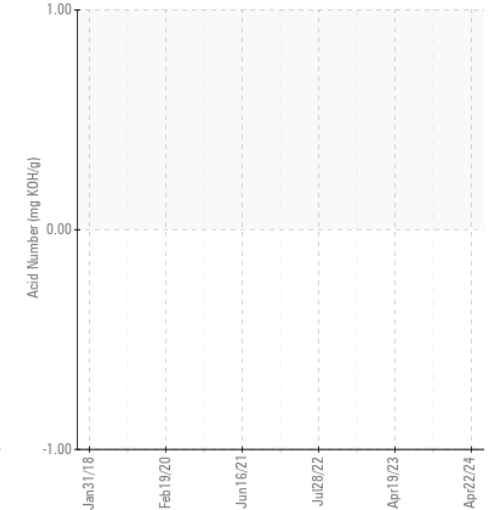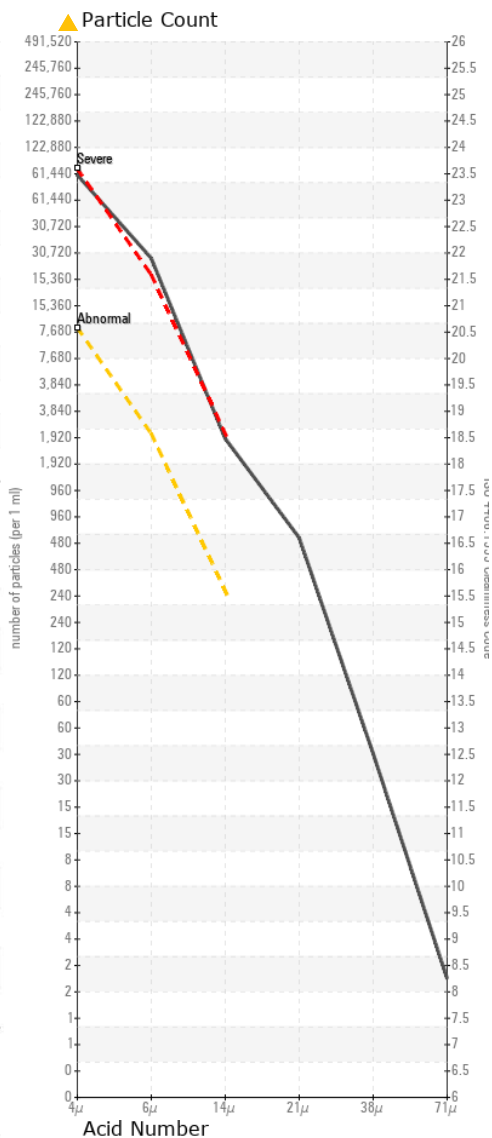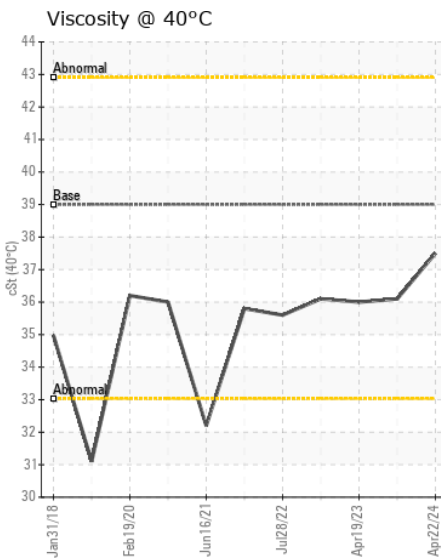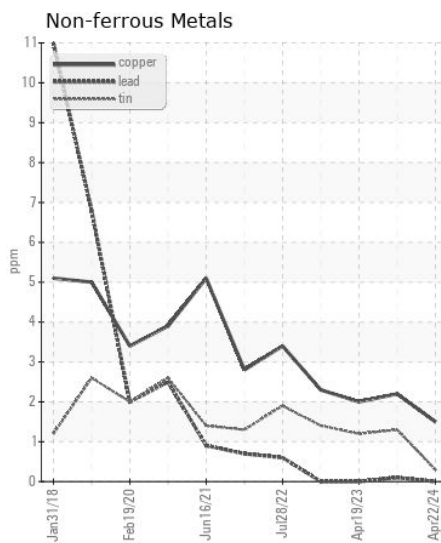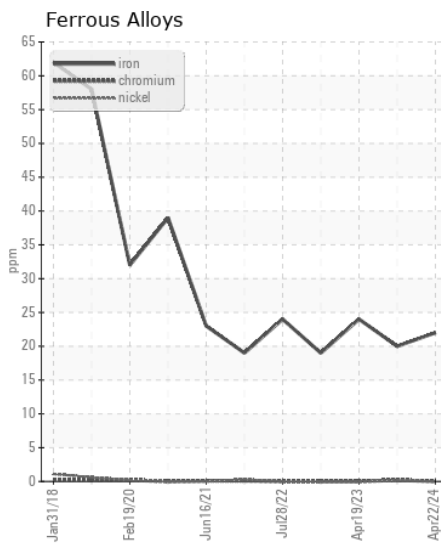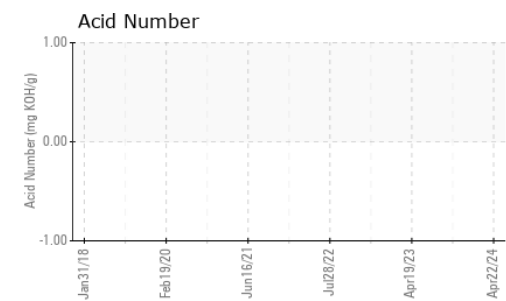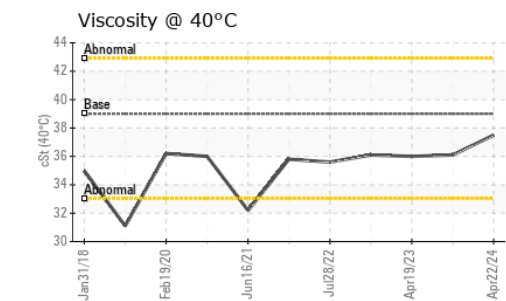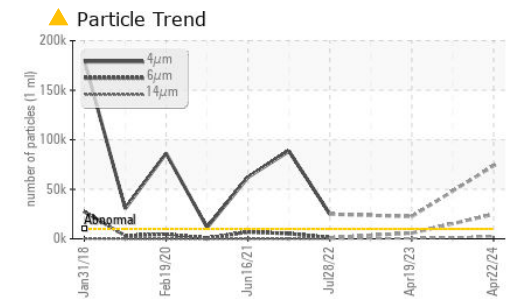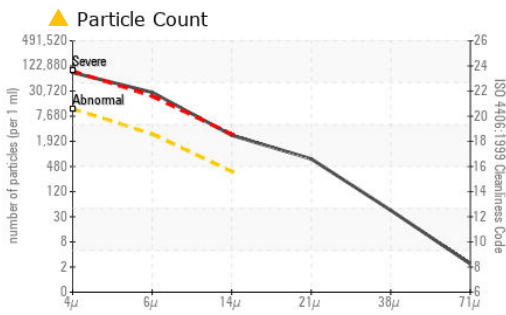

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0918701 **Received** : 24 Apr 2024  
**Lab Number** : 06158965 **Tested** : 25 Apr 2024  
**Unique Number** : 10994388 **Diagnosed** : 25 Apr 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: PrtCount )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**CAROLINA SUNROCK**  
 PO BOX 25  
 BUTNER, NC  
 US 27509

Contact: Leigh Dennis  
 rdennis@thesunrockgroup.com  
 T: (919)575-4505  
 F: (919)575-0162