



OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[G14873]

Machine Id

JOHN DEERE 14873

Component

Hydrostatic

Fluid

JOHN DEERE HYDRAU (--- GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WE0007234	---	---
Sample Date		Client Info		16 Apr 2024	---	---
Machine Age	hrs	Client Info		2143	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ABNORMAL	---	---

WEAR

The iron level is abnormal. All other component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
Iron	ppm	ASTM D5185m	>31	35	---	---
Chromium	ppm	ASTM D5185m	>9	0	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>10	0	---	---
Lead	ppm	ASTM D5185m	>11	0	---	---
Copper	ppm	ASTM D5185m	>41	11	---	---
Tin	ppm	ASTM D5185m	>5	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.






Silicon	ppm	ASTM D5185m	>31	<1	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647	>20000	4103	---	---
Particles >6µm		ASTM D7647	>5000	673	---	---
Particles >14µm		ASTM D7647	>640	51	---	---
Particles >21µm		ASTM D7647	>160	12	---	---
Particles >38µm		ASTM D7647	>40	1	---	---
Particles >71µm		ASTM D7647	>10	0	---	---
Oil Cleanliness		ISO 4406 (c)	>21/19/16	19/17/13	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION




The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	<1	---	---
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		2	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m		2	---	---
Calcium	ppm	ASTM D5185m	87	157	---	---
Phosphorus	ppm	ASTM D5185m	727	581	---	---
Zinc	ppm	ASTM D5185m	900	754	---	---
Sulfur	ppm	ASTM D5185m	1500	1847	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.70	---	---
Visc @ 40°C	cSt	ASTM D445	65	55.9	---	---



▲ Ferrous Alloys

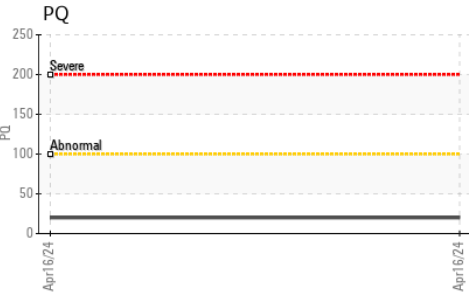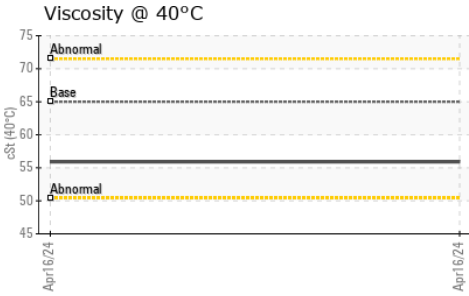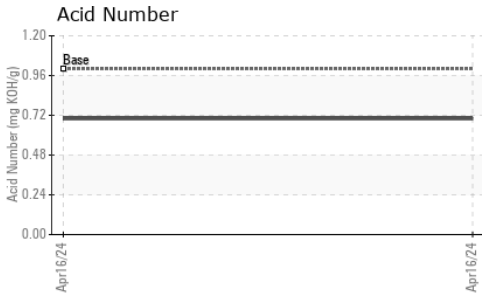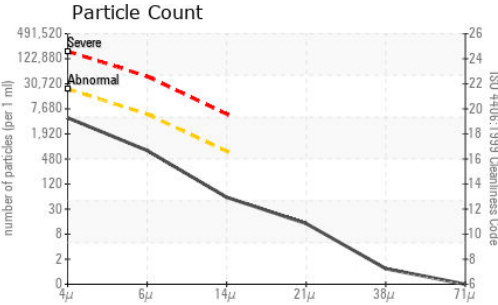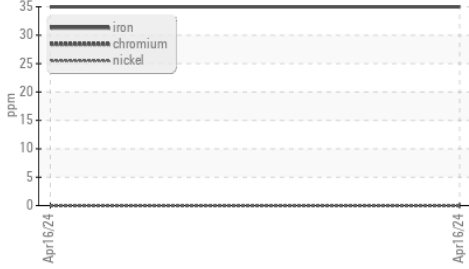

▲ Ferrous Alloys

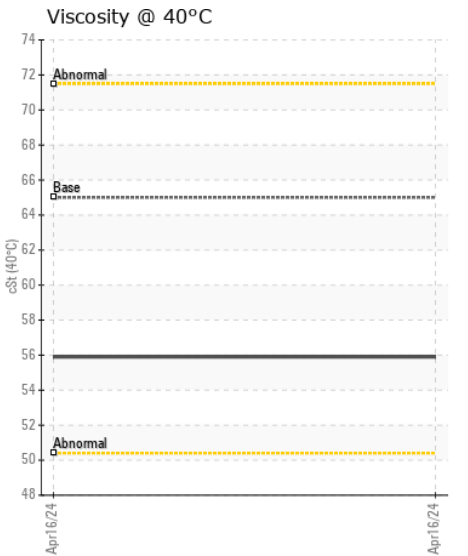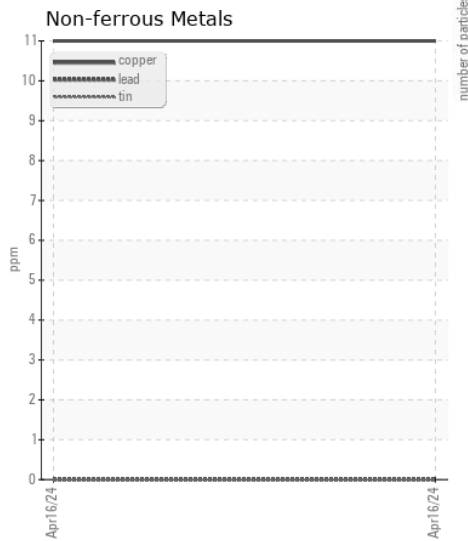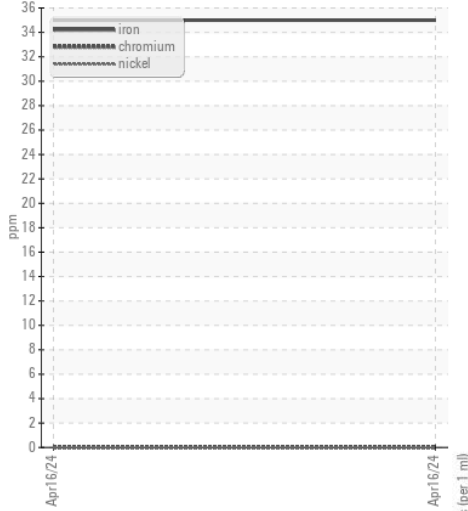

Particle Count

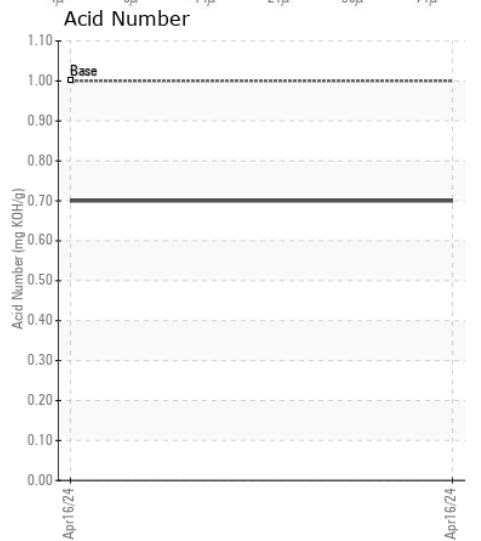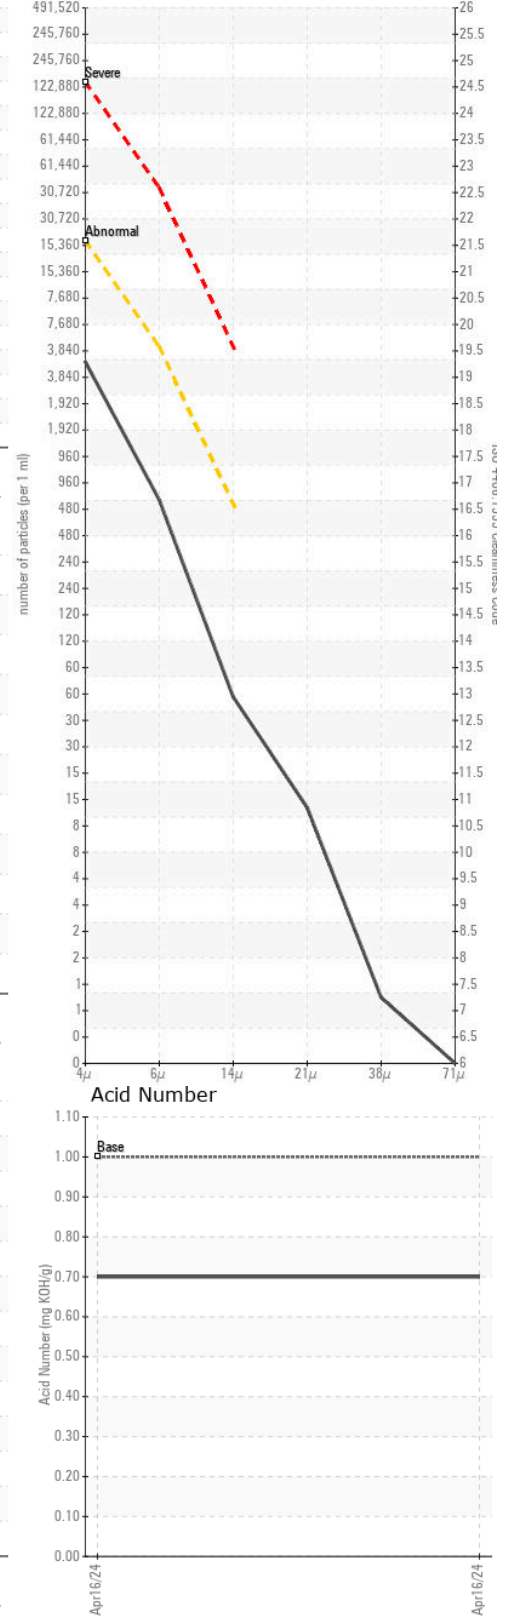

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WE0007234 **Received** : 24 Apr 2024
Lab Number : 06158976 **Tested** : 25 Apr 2024
Unique Number : 10994399 **Diagnosed** : 25 Apr 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ, PrtCount)

WARRIOR TRACTOR AND EQUIPMENT - GRAYSVILLE
 4308 WATER TRAIL
 GRAYSVILLE, AL
 US 35073
 Contact: BEN BYRKET
 bbyrket@warriortractor.com
 T: (205)675-9045
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)