



|                 |               |
|-----------------|---------------|
| WEAR            | <b>NORMAL</b> |
| CONTAMINATION   | <b>NORMAL</b> |
| FLUID CONDITION | <b>NORMAL</b> |

Machine Id  
**JOHN DEERE 137**  
 Component  
**Hydraulic System**  
 Fluid  
**{not provided} (--- QTS)**

### RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

| Test           | UOM | Method      | Limit/Abn | Current            | History1    | History2    |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number  |     | Client Info |           | <b>JR0189719</b>   | JR0189766   | JR0135343   |
| Sample Date    |     | Client Info |           | <b>19 Apr 2024</b> | 19 Feb 2024 | 16 Nov 2023 |
| Machine Age    | hrs | Client Info |           | <b>2508</b>        | 2054        | 1501        |
| Oil Age        | hrs | Client Info |           | <b>0</b>           | 2054        | 1501        |
| Filter Age     | hrs | Client Info |           | <b>0</b>           | 2054        | 1501        |
| Oil Changed    |     | Client Info |           | <b>N/A</b>         | Not Changd  | Not Changd  |
| Filter Changed |     | Client Info |           | <b>N/A</b>         | Not Changd  | Not Changd  |
| Sample Status  |     |             |           | <b>NORMAL</b>      | NORMAL      | NORMAL      |

### WEAR

All component wear rates are normal.

| PQ           | UOM    | Method      | Limit/Abn | Current      | History1 | History2 |
|--------------|--------|-------------|-----------|--------------|----------|----------|
| PQ           |        | ASTM D8184  |           | <b>12</b>    | 15       | 10       |
| Iron         | ppm    | ASTM D5185m | >20       | <b>&lt;1</b> | 1        | 1        |
| Chromium     | ppm    | ASTM D5185m | >10       | <b>2</b>     | 2        | 1        |
| Nickel       | ppm    | ASTM D5185m | >10       | <b>0</b>     | 0        | 0        |
| Titanium     | ppm    | ASTM D5185m |           | <b>0</b>     | 0        | 0        |
| Silver       | ppm    | ASTM D5185m |           | <b>0</b>     | 0        | 0        |
| Aluminum     | ppm    | ASTM D5185m | >10       | <b>0</b>     | 0        | 0        |
| Lead         | ppm    | ASTM D5185m | >10       | <b>0</b>     | 0        | 0        |
| Copper       | ppm    | ASTM D5185m | >75       | <b>0</b>     | 0        | <1       |
| Tin          | ppm    | ASTM D5185m | >10       | <b>0</b>     | 0        | 0        |
| Vanadium     | ppm    | ASTM D5185m |           | <b>0</b>     | 0        | <1       |
| White Metal  | scalar | *Visual     | NONE      | <b>NONE</b>  | NONE     | NONE     |
| Yellow Metal | scalar | *Visual     | NONE      | <b>NONE</b>  | NONE     | NONE     |

### CONTAMINATION











The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

|                  |        |              |           |                 |          |          |
|------------------|--------|--------------|-----------|-----------------|----------|----------|
| Silicon          | ppm    | ASTM D5185m  | >20       | <b>0</b>        | <1       | 1        |
| Potassium        | ppm    | ASTM D5185m  | >20       | <b>1</b>        | <1       | <1       |
| Water            |        | WC Method    | >0.1      | <b>NEG</b>      | NEG      | NEG      |
| Particles >4µm   |        | ASTM D7647   | >5000     | <b>1506</b>     | 1812     | 1283     |
| Particles >6µm   |        | ASTM D7647   | >1300     | <b>94</b>       | 95       | 225      |
| Particles >14µm  |        | ASTM D7647   | >160      | <b>24</b>       | 18       | 20       |
| Particles >21µm  |        | ASTM D7647   | >40       | <b>13</b>       | 5        | 6        |
| Particles >38µm  |        | ASTM D7647   | >10       | <b>1</b>        | 0        | 1        |
| Particles >71µm  |        | ASTM D7647   | >3        | <b>0</b>        | 0        | 1        |
| Oil Cleanliness  |        | ISO 4406 (c) | >19/17/14 | <b>18/14/12</b> | 18/14/11 | 17/15/11 |
| Silt             | scalar | *Visual      | NONE      | <b>NONE</b>     | NONE     | NONE     |
| Debris           | scalar | *Visual      | NONE      | <b>NONE</b>     | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual      | NONE      | <b>NONE</b>     | NONE     | NONE     |
| Appearance       | scalar | *Visual      | NORML     | <b>NORML</b>    | NORML    | NORML    |
| Odor             | scalar | *Visual      | NORML     | <b>NORML</b>    | NORML    | NORML    |
| Emulsified Water | scalar | *Visual      | >0.1      | <b>NEG</b>      | NEG      | NEG      |

### FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

|                  |          |             |  |             |      |      |
|------------------|----------|-------------|--|-------------|------|------|
| Sodium           | ppm      | ASTM D5185m |  | <b>2</b>    | 2    | 2    |
| Boron            | ppm      | ASTM D5185m |  | <b>0</b>    | 4    | 2    |
| Barium           | ppm      | ASTM D5185m |  | <b>0</b>    | 0    | 0    |
| Molybdenum       | ppm      | ASTM D5185m |  | <b>0</b>    | 0    | <1   |
| Manganese        | ppm      | ASTM D5185m |  | <b>0</b>    | 0    | 0    |
| Magnesium        | ppm      | ASTM D5185m |  | <b>2</b>    | 4    | 0    |
| Calcium          | ppm      | ASTM D5185m |  | <b>255</b>  | 264  | 217  |
| Phosphorus       | ppm      | ASTM D5185m |  | <b>676</b>  | 703  | 648  |
| Zinc             | ppm      | ASTM D5185m |  | <b>891</b>  | 881  | 842  |
| Sulfur           | ppm      | ASTM D5185m |  | <b>2267</b> | 2313 | 1795 |
| Acid Number (AN) | mg KOH/g | ASTM D8045  |  | <b>0.62</b> | 0.57 | 0.56 |
| Visc @ 40°C      | cSt      | ASTM D445   |  | <b>56.6</b> | 57.2 | 57.9 |

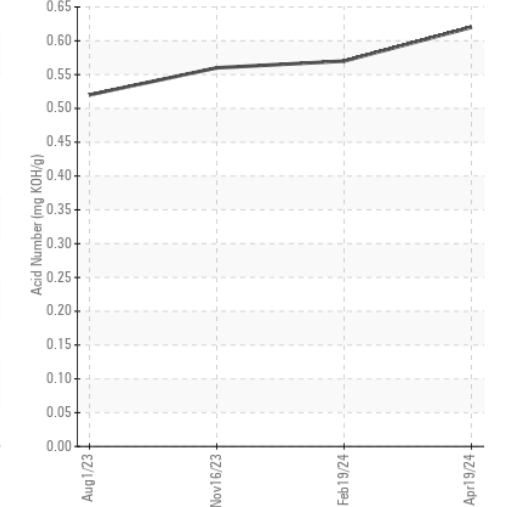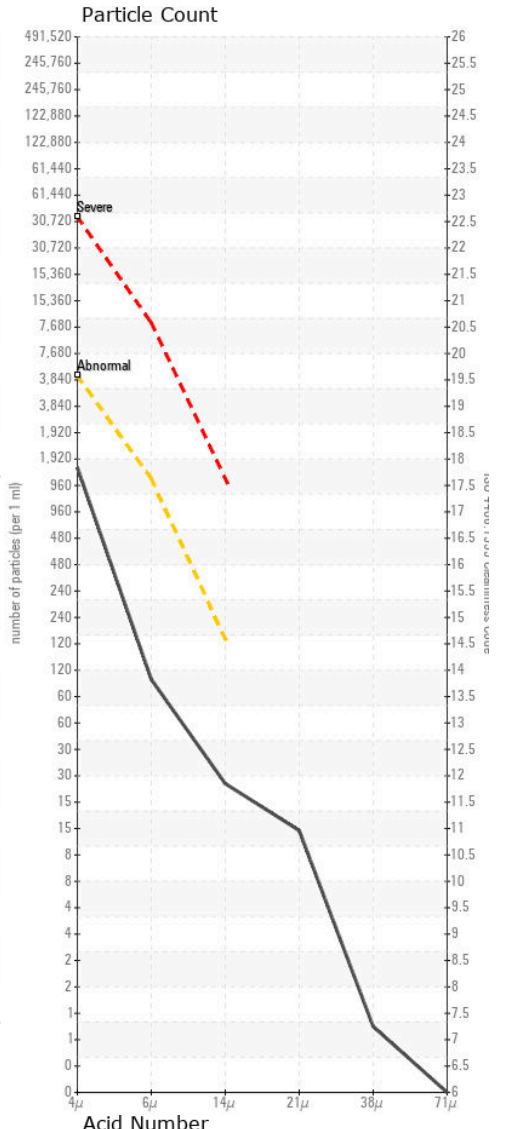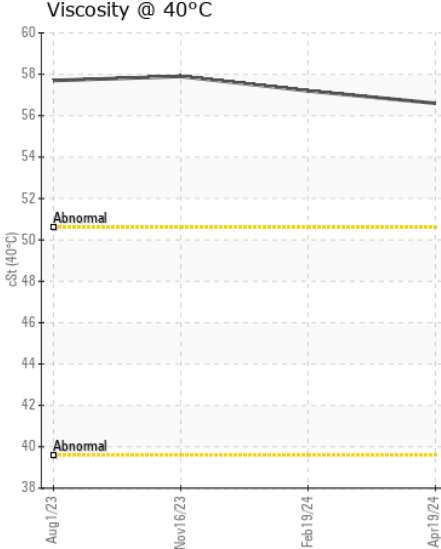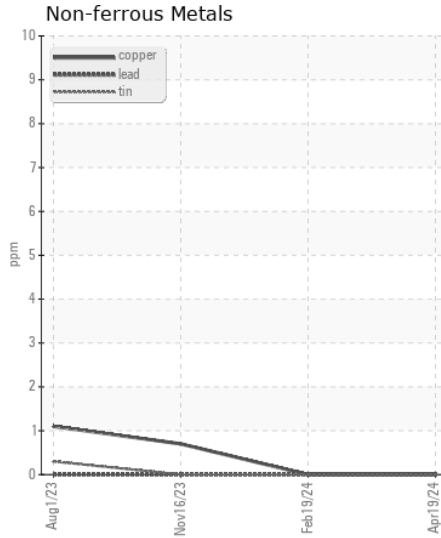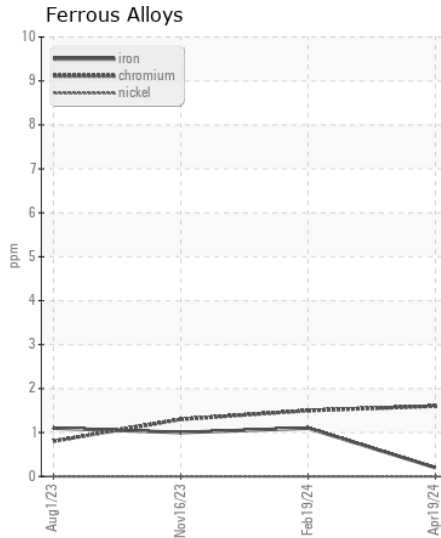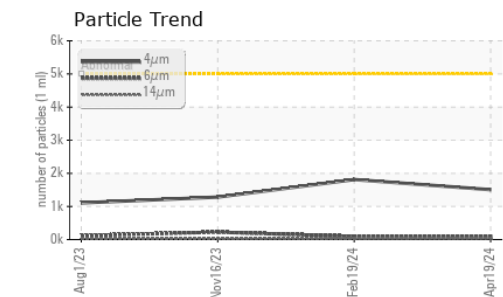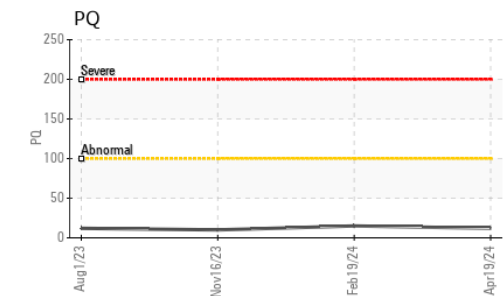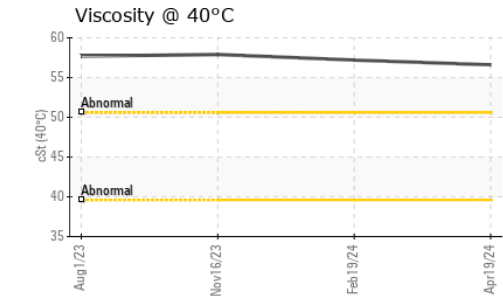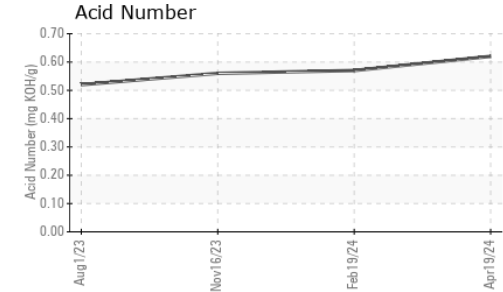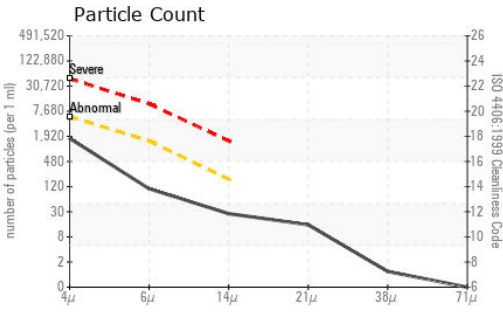

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0189719 **Received** : 24 Apr 2024  
**Lab Number** : 06159002 **Tested** : 25 Apr 2024  
**Unique Number** : 10994425 **Diagnosed** : 25 Apr 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

**THE SCOTTS COMPANY**  
 3175 BRIGHT LEAF RD  
 LAWRENCEVILLE, VA  
 US 23868  
 Contact: REX WATSON

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)