



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 700L 1T0700LXHNF430145

Component
Left Final Drive

Fluid
JOHN DEERE HY-GARD HYDRAULIC/RANSMISSION (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0212413	JR0202852	JR0191183
Sample Date		Client Info		19 Apr 2024	05 Feb 2024	08 Nov 2023
Machine Age	hrs	Client Info		3004	2473	2072
Oil Age	hrs	Client Info		2603	401	1443
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Changed
Filter Changed		Client Info		None	Not Changd	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	55	57	8
Iron	ppm	ASTM D5185m	>750	97	62	6
Chromium	ppm	ASTM D5185m	>9	1	1	0
Nickel	ppm	ASTM D5185m	>10	0	<1	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	1	0
Aluminum	ppm	ASTM D5185m	>40	2	2	<1
Lead	ppm	ASTM D5185m	>15	0	0	0
Copper	ppm	ASTM D5185m	>40	<1	<1	0
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>75	10	8	4
Potassium	ppm	ASTM D5185m	>20	0	2	0
Water		WC Method	>0.075	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	LIGHT	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	0	0	0
Boron	ppm	ASTM D5185m		15	18	0
Barium	ppm	ASTM D5185m		0	11	2
Molybdenum	ppm	ASTM D5185m		14	12	0
Manganese	ppm	ASTM D5185m		2	1	<1
Magnesium	ppm	ASTM D5185m		141	114	92
Calcium	ppm	ASTM D5185m		3413	2804	2932
Phosphorus	ppm	ASTM D5185m		1030	917	961
Zinc	ppm	ASTM D5185m		1255	1034	1146
Sulfur	ppm	ASTM D5185m		3849	2653	3246
Visc @ 40°C	cSt	ASTM D445	59	51.5	51.8	58.0

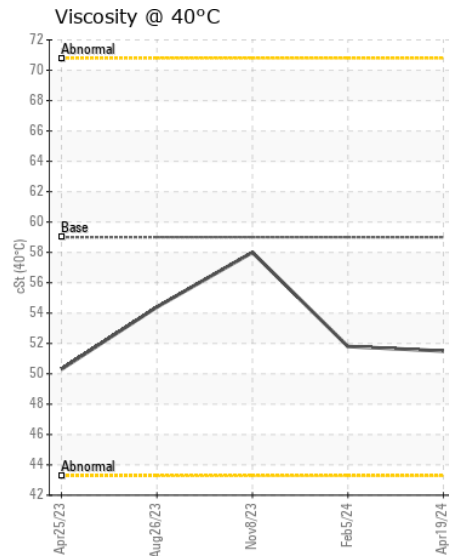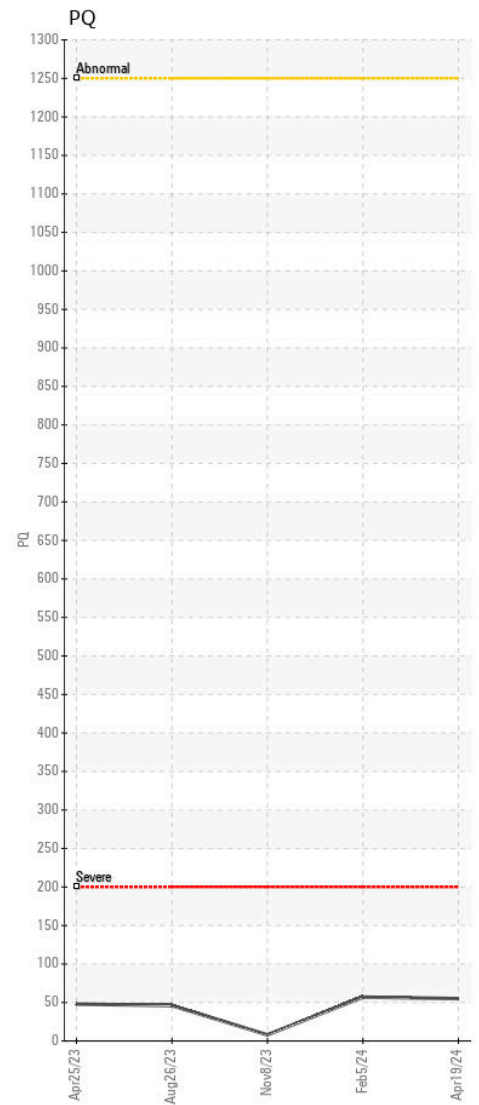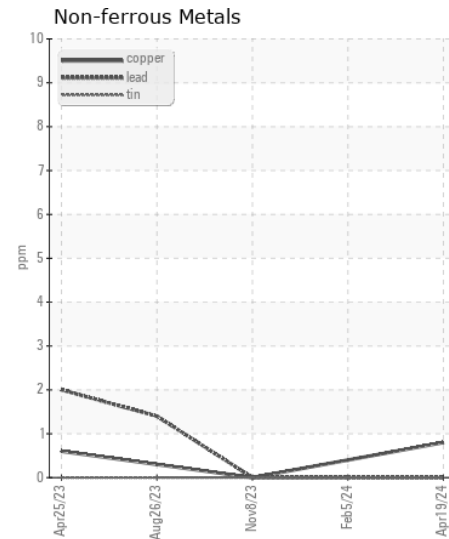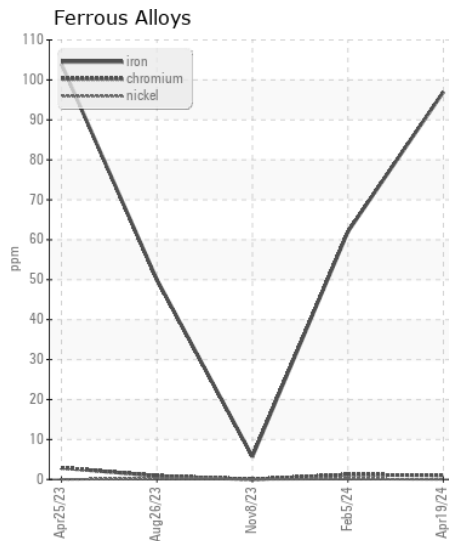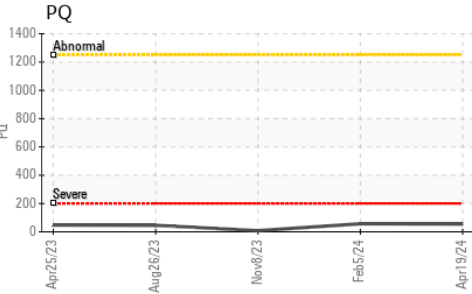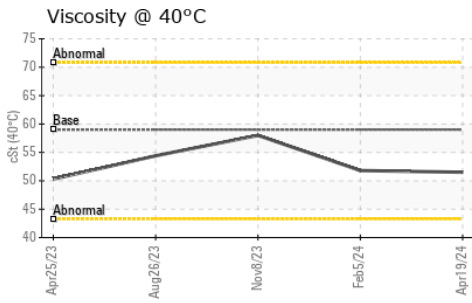

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0212413 **Received** : 24 Apr 2024
Lab Number : 06159365 **Tested** : 25 Apr 2024
Unique Number : 10994788 **Diagnosed** : 26 Apr 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - GARNER
 4161 AUBURN CHURCH RD
 GARNER, NC
 US 27529

Contact: RALEIGH SHOP
 sean.betts@jamesriverequipment.com; catherine.anastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (919)614-2260
 F: (919)779-5432