



# ASCENDUM

## OIL ANALYSIS REPORT

WEAR **NORMAL**

CONTAMINATION **NORMAL**

FLUID CONDITION **NORMAL**



Area

**Ascendum Machinery/500 Hour CSA**

Machine Id

**VOLVO A40G 2306 (S/N 353318)**

Component

**Rear Axle**

Fluid

**VOLVO SUPER GEAR OIL 75W-80-GO102 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>ASC0010214</b>	ASC0006221	VCP435481
Sample Date		Client Info		<b>22 Apr 2024</b>	04 Jan 2024	01 Aug 2023
Machine Age	hrs	Client Info		<b>1498</b>	1087	514
Oil Age	hrs	Client Info		<b>500</b>	1087	514
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changed</b>	Changed	Not Changed
Filter Changed		Client Info		<b>N/A</b>	N/A	Not Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	<b>121</b>	207	201
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	3	3
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>0</b>	0	<1
Lead	ppm	ASTM D5185m	>50	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>150	<b>0</b>	<1	<1
Tin	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>3</b>	6	4
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	4	4
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	LIGHT	LIGHT
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>2</b>	3	3
Boron	ppm	ASTM D5185m		<b>263</b>	250	340
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>1</b>	3	6
Manganese	ppm	ASTM D5185m		<b>6</b>	10	11
Magnesium	ppm	ASTM D5185m		<b>2</b>	4	2
Calcium	ppm	ASTM D5185m		<b>23</b>	17	16
Phosphorus	ppm	ASTM D5185m		<b>2128</b>	2358	2650
Zinc	ppm	ASTM D5185m		<b>5</b>	0	<1
Sulfur	ppm	ASTM D5185m		<b>31644</b>	26556	25056
Visc @ 40°C	cSt	ASTM D445		<b>69.3</b>	52.1	52.2

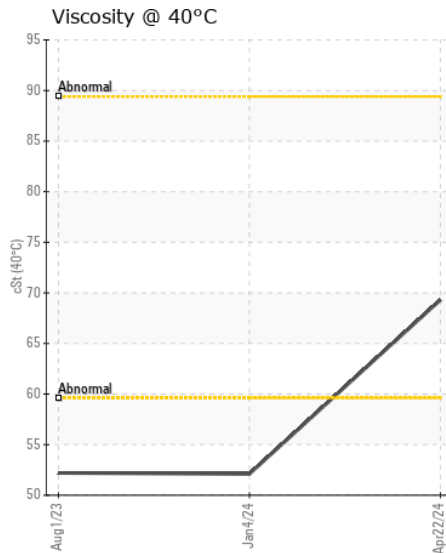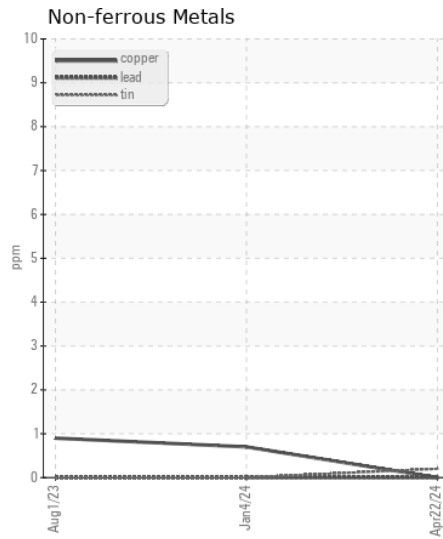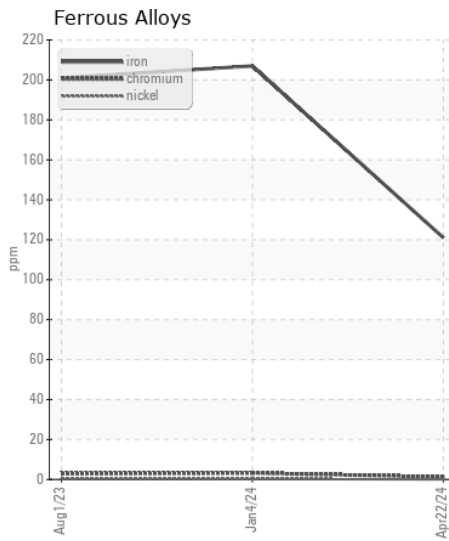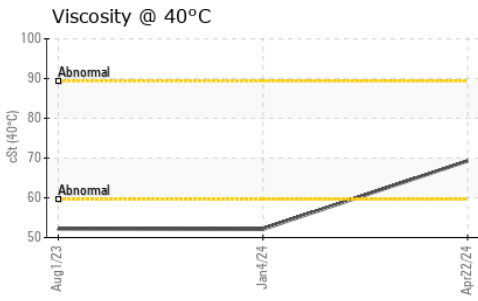

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ASC0010214  
**Lab Number** : 06159505  
**Unique Number** : 10994928  
**Test Package** : CONST

**Received** : 24 Apr 2024  
**Tested** : 25 Apr 2024  
**Diagnosed** : 26 Apr 2024 - Jonathan Hester

**TRIANGLE GRADING AND PAVING INC**  
 1521 Huffman Mill Rd  
 BURLINGTON, NC  
 US 27216

Contact: KAREN HILLIARD  
 khilliard@trianglegradingpaving.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (336)584-1745  
 F: (336)584-0145